



Promoting Routability

Routing for the Internet

APRICOT 2001 Tutorial – Kuala Lumpur

26th February 2001

CISCO SYSTEMS



Introduction

- **Presenter:**
Philip Smith, Consulting Engineer
Office of the CTO, Cisco Systems
e-mail: pfs@cisco.com

- **Please ask questions**

Agenda

- **Routing Terms and Concepts**
- **Introduction to IGPs**
- **BGP for ISPs**
- **Routing Design for ISPs**
- **Routing Etiquette and the IRR**

Goals

- **Promoting a healthy Internet**
- **Efficient and Effective Routing Configuration**
- **Internet Routing Registry**
 - awareness**
 - understanding**
 - participation**



Routing Terms and Concepts

What does it all mean?

Network Topologies

Routed backbone

- HDLC or PPP links between routers
- Easier routing configuration and debugging

Switched backbone

- Frame Relay/ATM switches in core
- Surrounded by routers
- Complex routing & debugging
- Traffic Engineering


PoP Topologies

- **Core** routers - high speed trunk connections
- **Distribution** routers and **Access** routers - high port density
- **Border** routers - connections to other AS's
- **Service** routers - hosting and servers
- **Some functions might be handled by a single router**

Transit, Peering and Default


- **Transit** - carrying traffic across a network, usually for a fee
- **Peering** - exchanging routing information and traffic
- **Default** - where to send traffic when there is no explicit match is in the routing table

Peering and Transit example

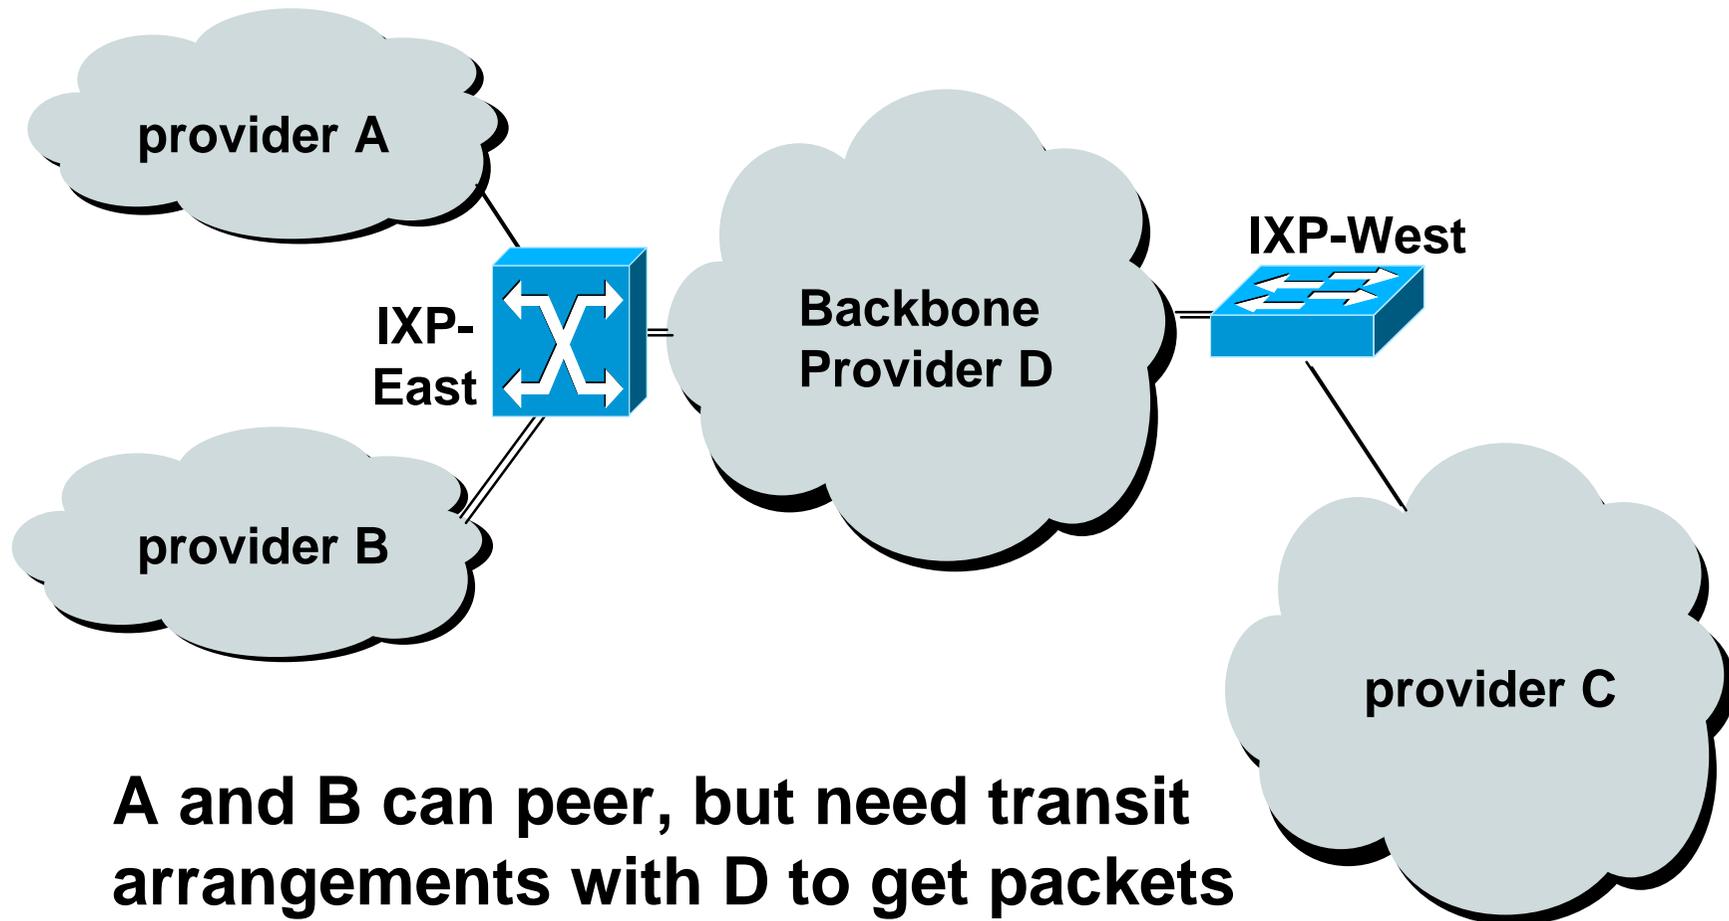

A and B can peer, but need transit arrangements with D to get packets to/from C

Private Interconnect

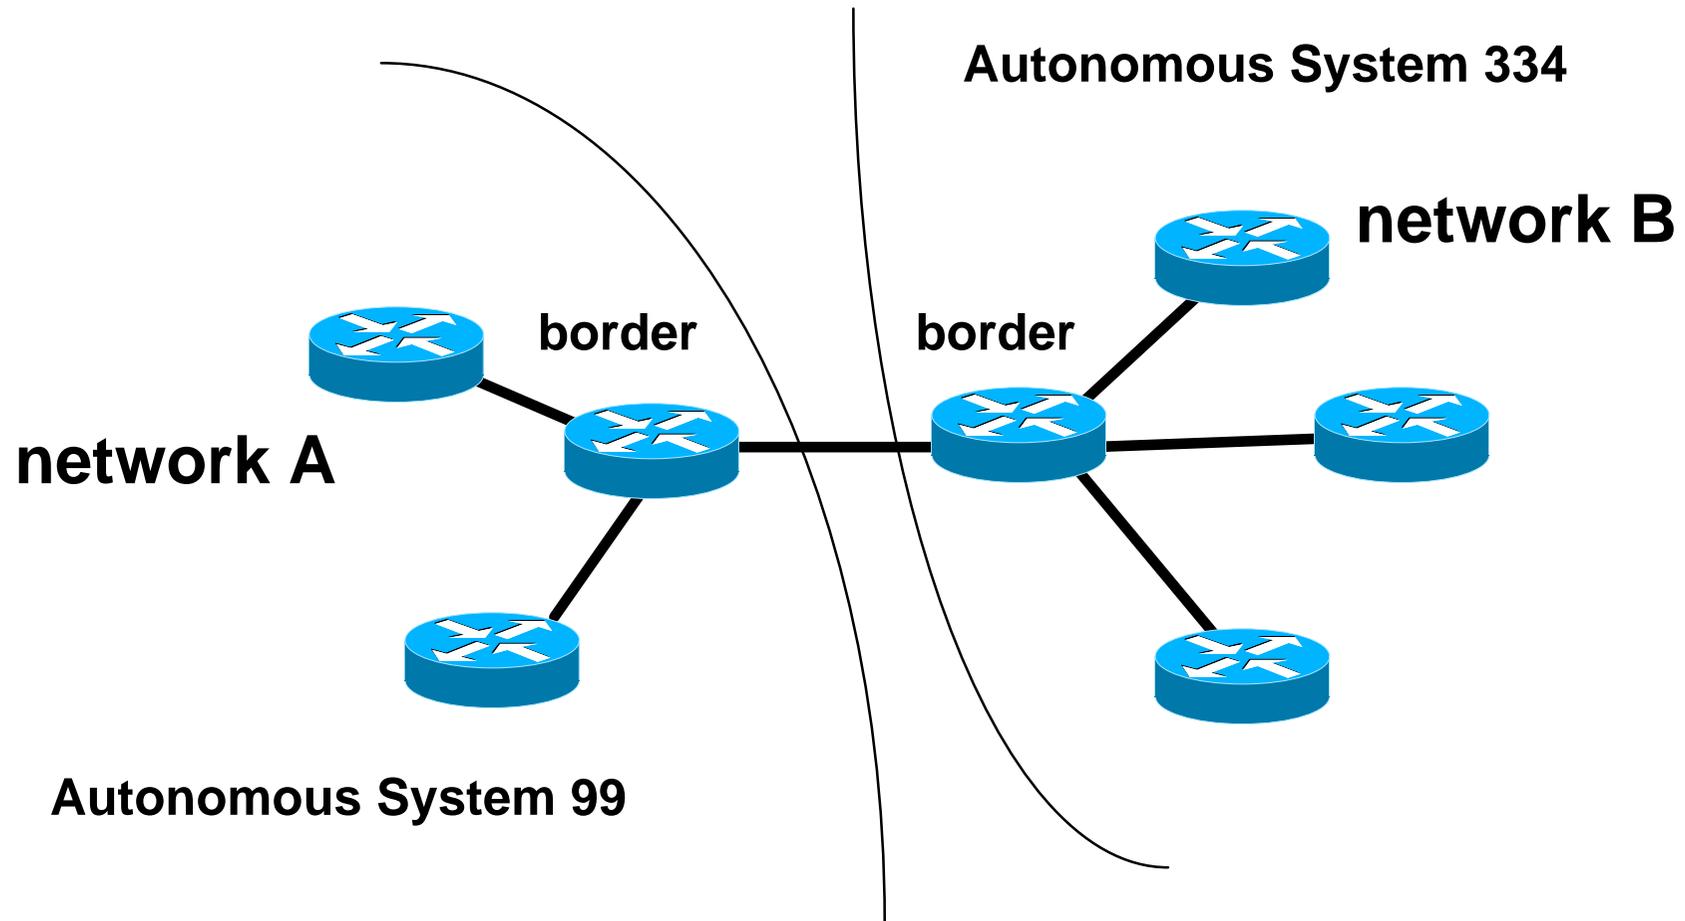


Public Interconnect Points

- **IXP - Internet eXchange Point**
- **NAP - Network Access Point**
- **local IXPs**
 - peering point for a group of local/regional providers
- **transit IXPs**
 - connects local providers to backbone (transit) providers
- **hybrid IXPs**
 - combines the function of local and transit

Public Interconnect Point

- **Centralised (in one facility)**
- **Distributed (connected via WAN links)**
- **Shared, switched or routed interconnect**
 - Router, FDDI, Ethernet, ATM, Frame relay, SMDS, etc.**
- **Each provider establishes relationship with other provider at IXP**
 - ISP border router peers with all other provider border routers**

Public Interconnect

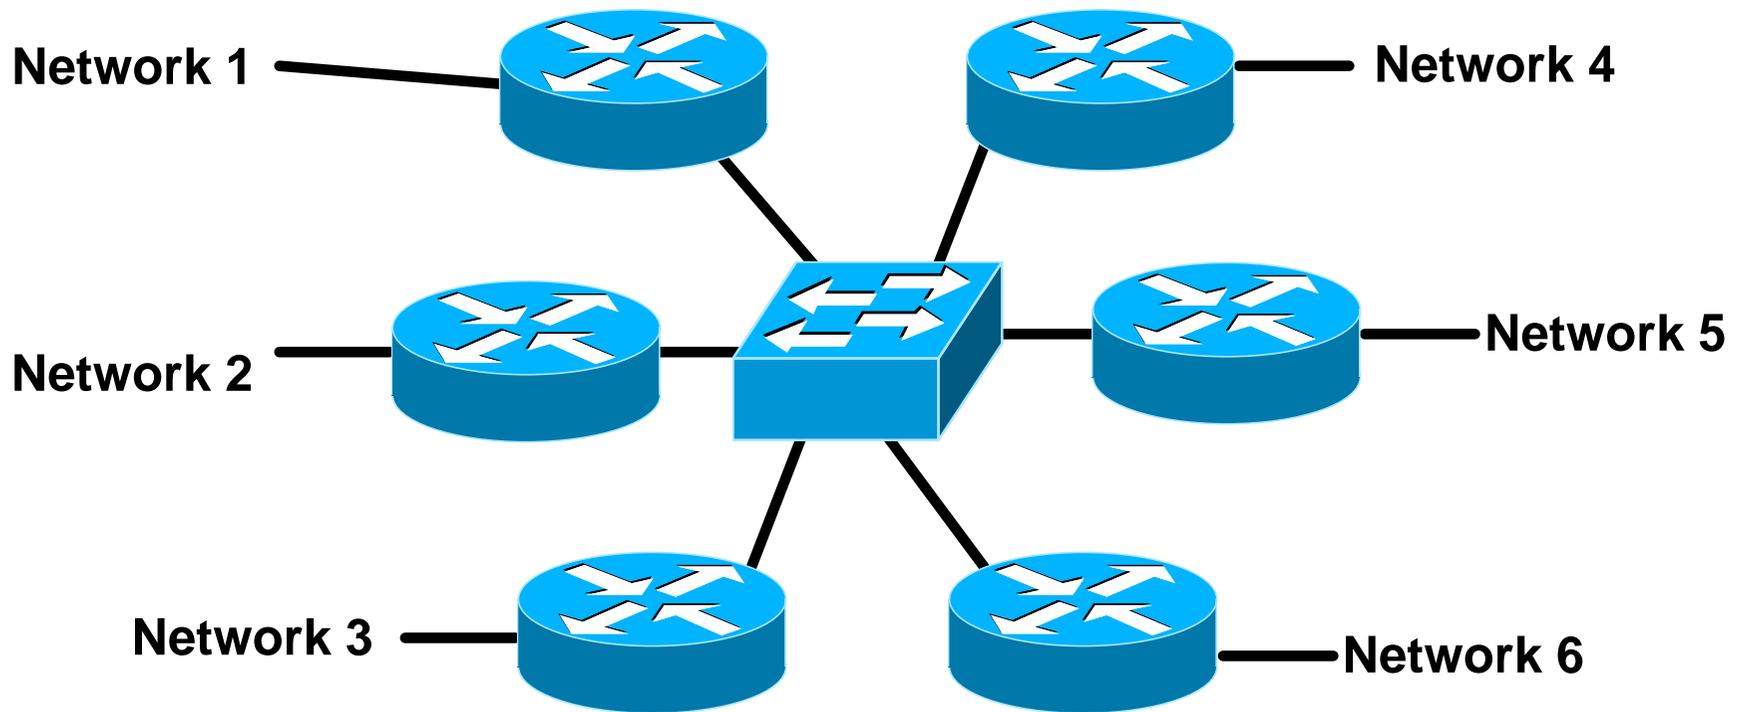


each of these represents a border router in a different autonomous system

Route Server

- **Device which maintains BGP routing table at IXP and forwards it to IXP participants**
- **Advantages:**
 - reduces resource burden on border routers (CPU, memory, configuration complexity)
 - reduces administrative burden on providers
- **Disadvantages:**
 - must rely on a third party (for management, configuration, software updates, maintenance, etc)

Route Server

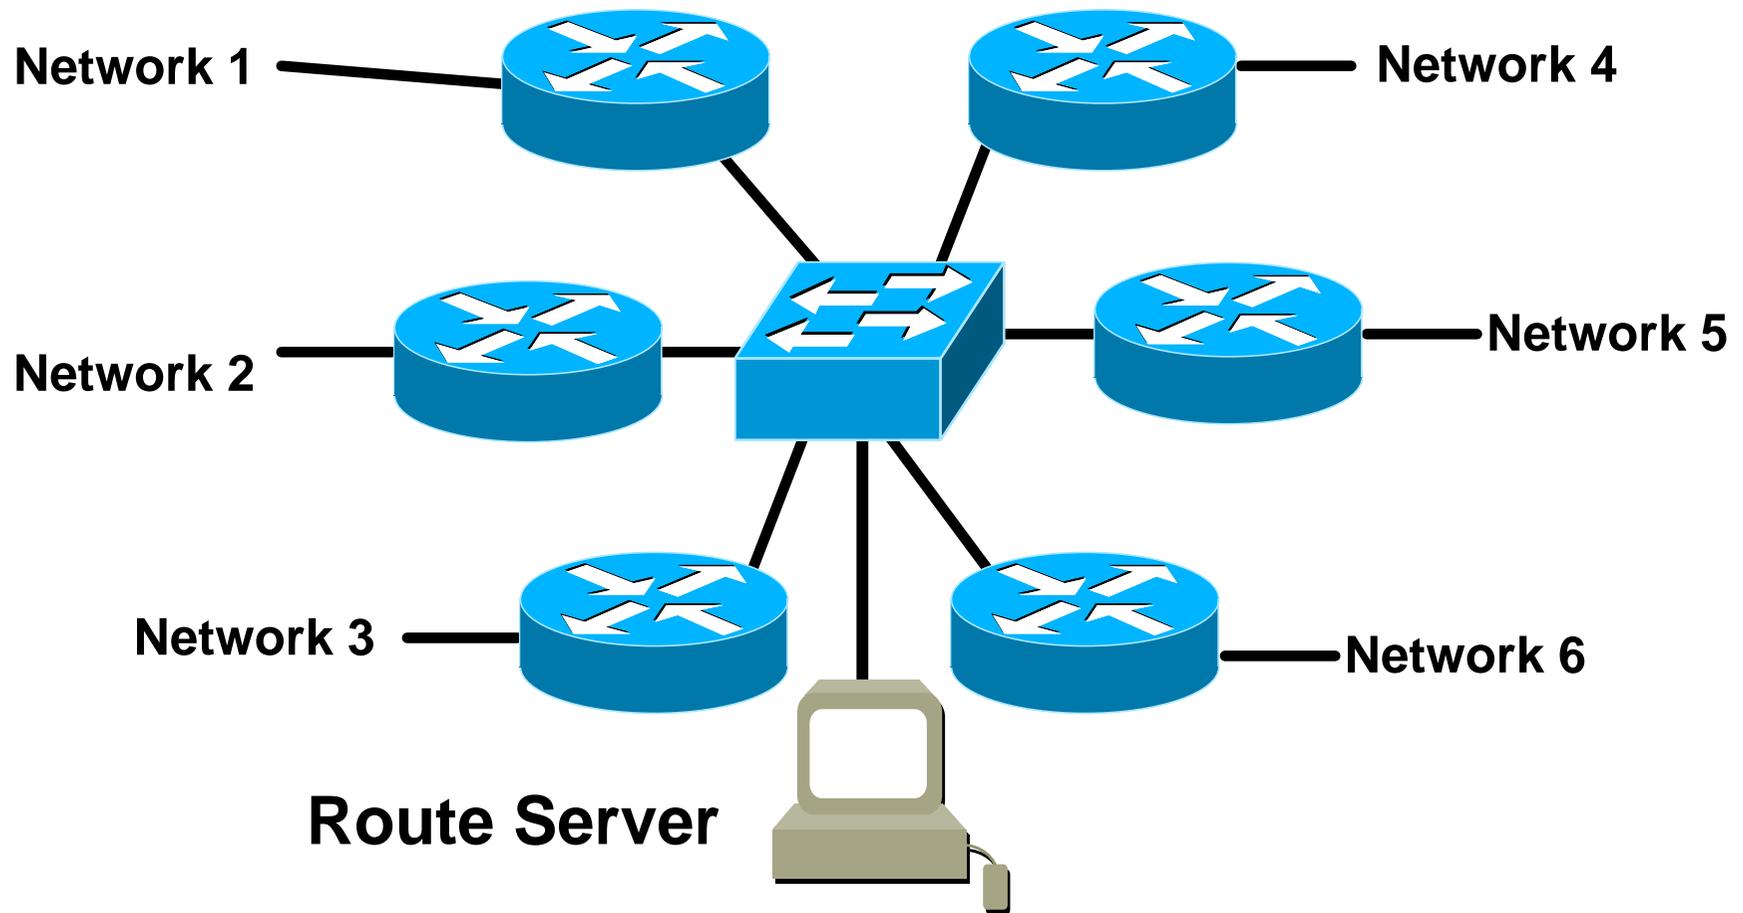




Internet Hierarchy

The pecking order


Default Free Zone

The default free zone is made up of Internet routers which have explicit routing information about the rest of the Internet, and therefore do not need to use a default route.

High Level View of the Global Internet

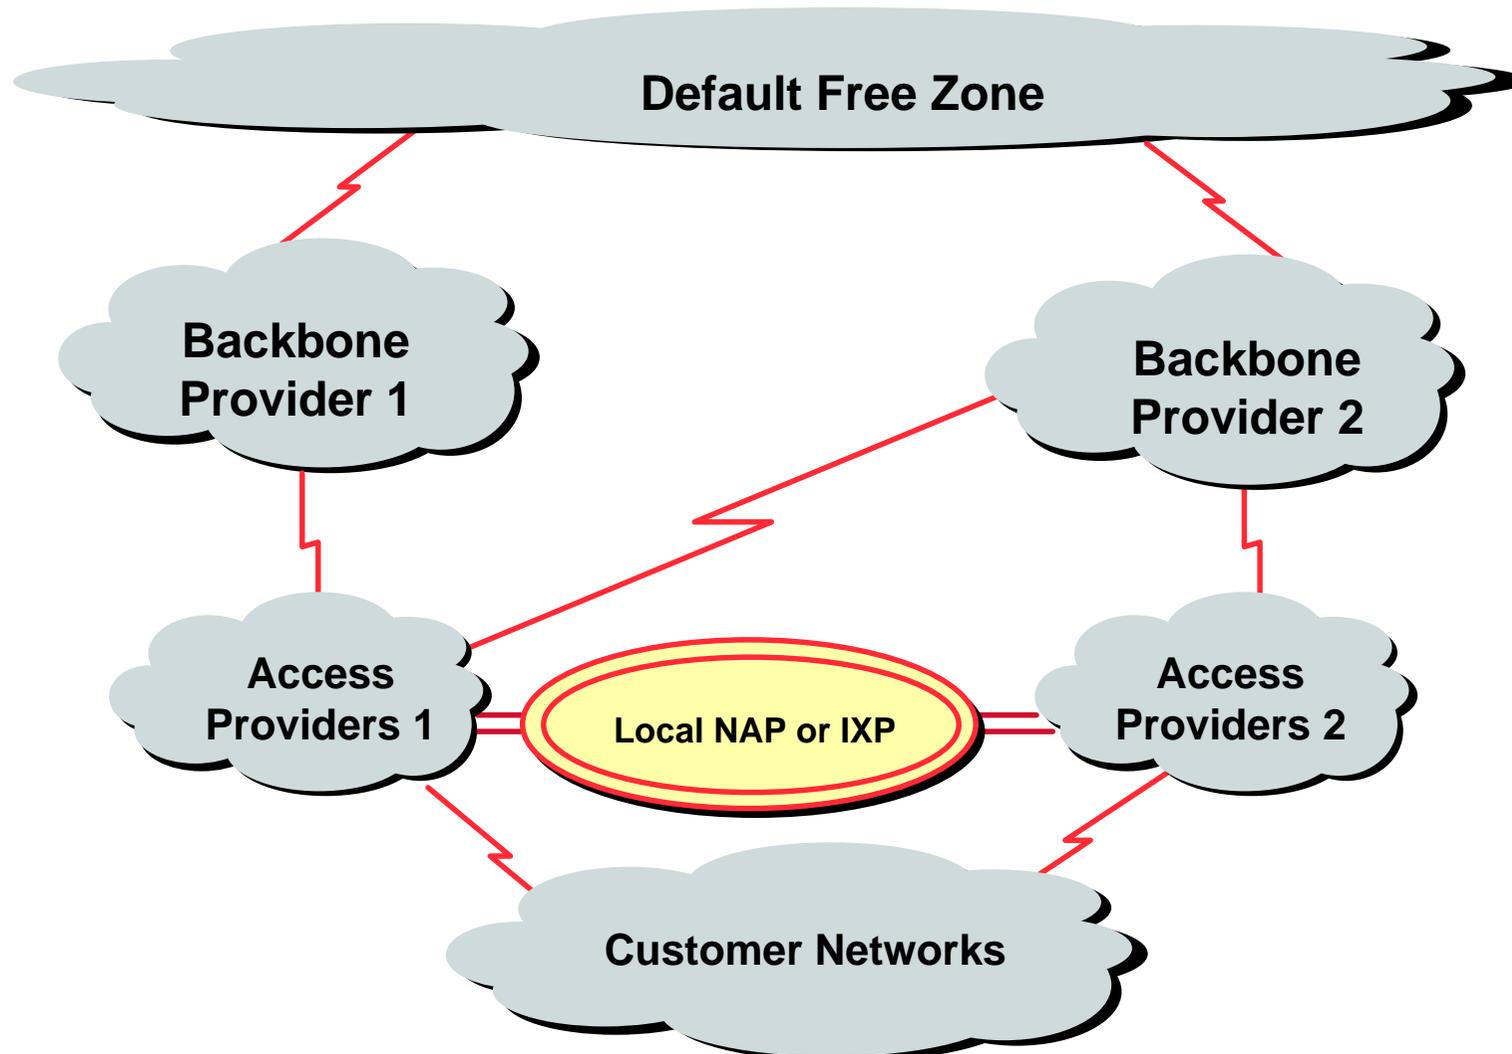

Categorising ISPs

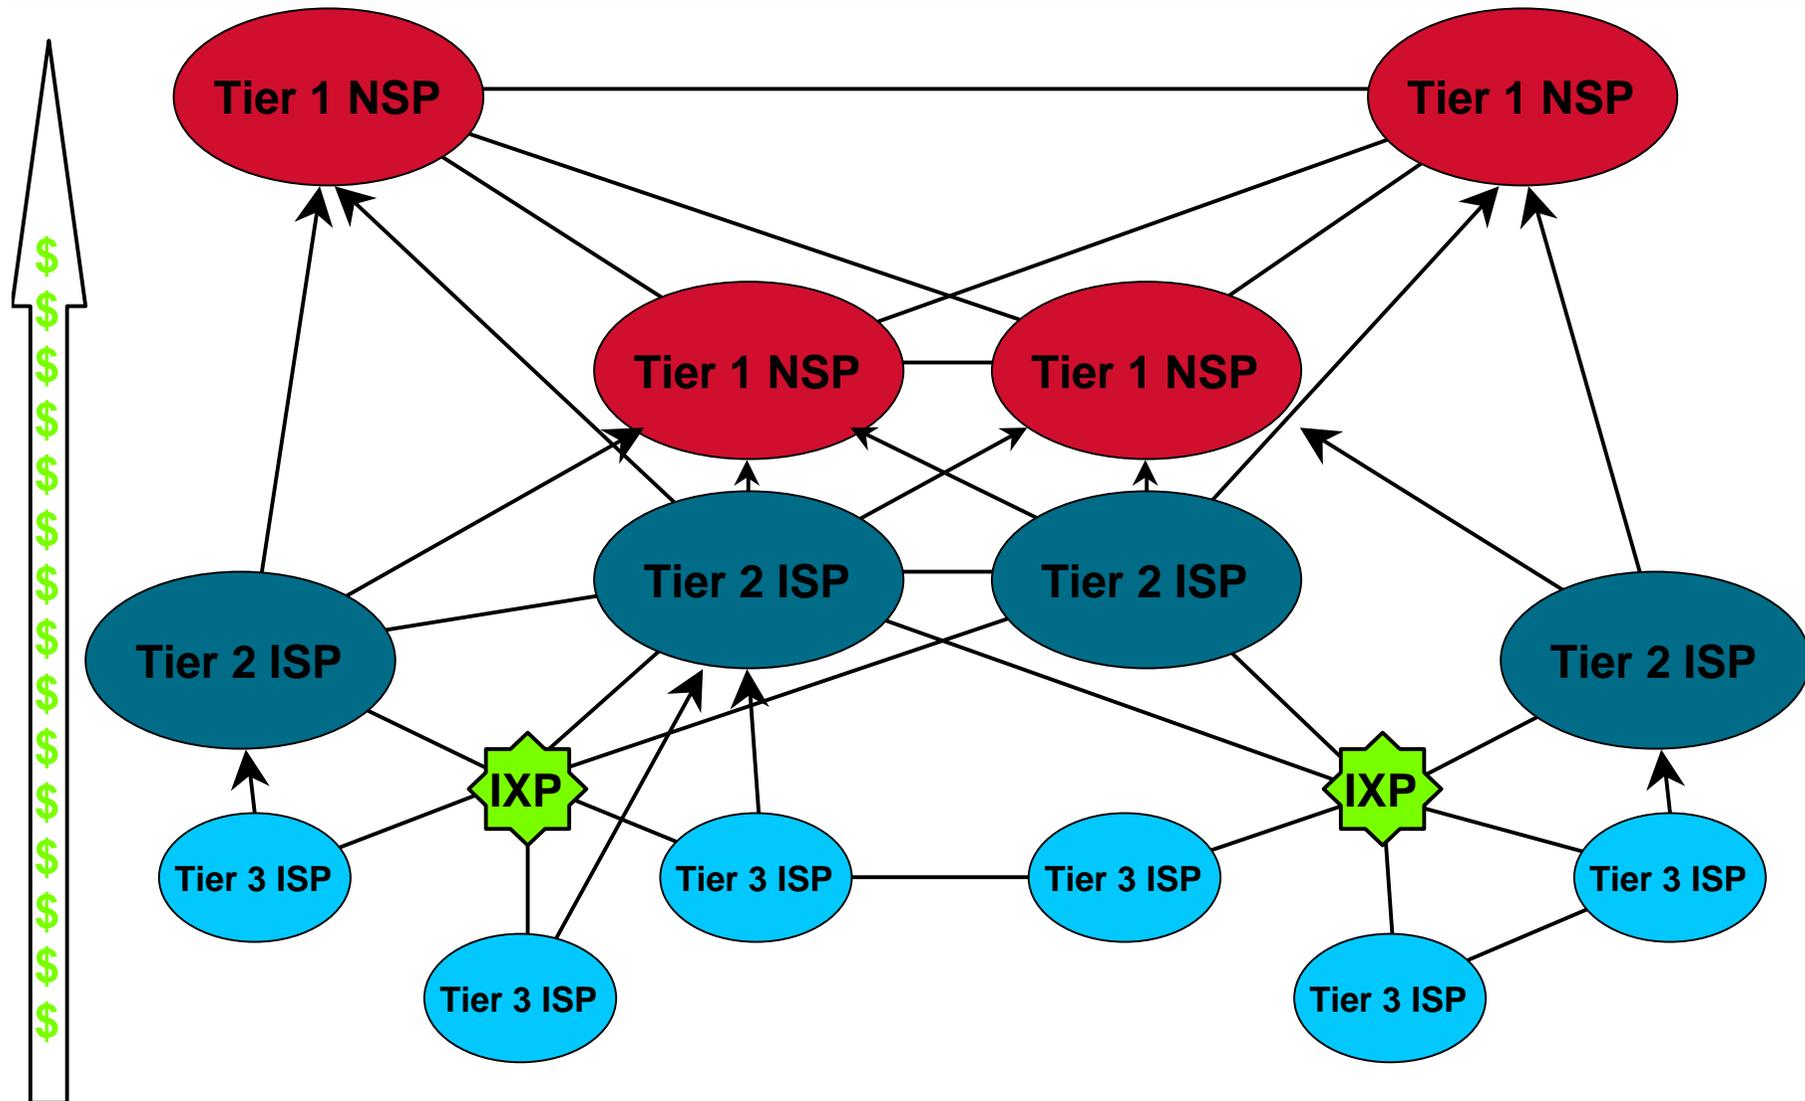

Inter-provider relationships

- **Peering between equivalent sizes of service providers (e.g. Tier 2 to Tier 2)**
shared cost private interconnection, equal traffic flows
“no cost peering”
- **Peering across exchange points**
if convenient, of mutual benefit, technically feasible
- **Fee based peering**
unequal traffic flows, “market position”



IP Addressing and Autonomous Systems

Where to get address space, ASNs, and who from?

IP Addressing

- Internet is **classless**
- Concept of Class A, class B or class C is **no more**

engineers talk in terms of prefix length, for example the class B 158.43 is now called 158.43/16.

- All routers must be **CIDR** capable

Classless InterDomain Routing

RFC1812 - Router Requirements

IP Addressing

- **Pre-CIDR (<1994)**
 - big networks got a class A
 - medium networks got a class B
 - small networks got a class C
- **Nowadays**
 - allocations/assignments made according to demonstrated need - **CLASSLESS**

IP Addressing

- IPv4 Address space is a resource **shared** amongst **all** Internet users

Regional Internet Registries delegated allocation responsibility by the IANA

APNIC, ARIN, RIPE NCC are the three RIRs

RIRs **allocate** address space to ISPs and Local Internet Registries

ISPs/LIRs **assign** address space to end customers or other ISPs

- 51% of available IPv4 address space used

Definitions

- **Non-portable - ‘provider aggregatable’ (PA)**
 - Customer uses RIR member’s address space while connected to Internet**
 - Customer has to renumber to change ISP**
 - Aids control of size of Internet routing table**
 - May fragment provider block when multihoming**
- **PA space is allocated to the RIR member with the requirement that all assignments are announced as an aggregate**

Definitions

- **Portable - 'provider independent' (PI)**


Customer gets or has address space independent of ISP

Customer keeps addresses when changing ISP

Bad for size of Internet routing table

PI space is rarely distributed by the RIRs

Autonomous System (AS)

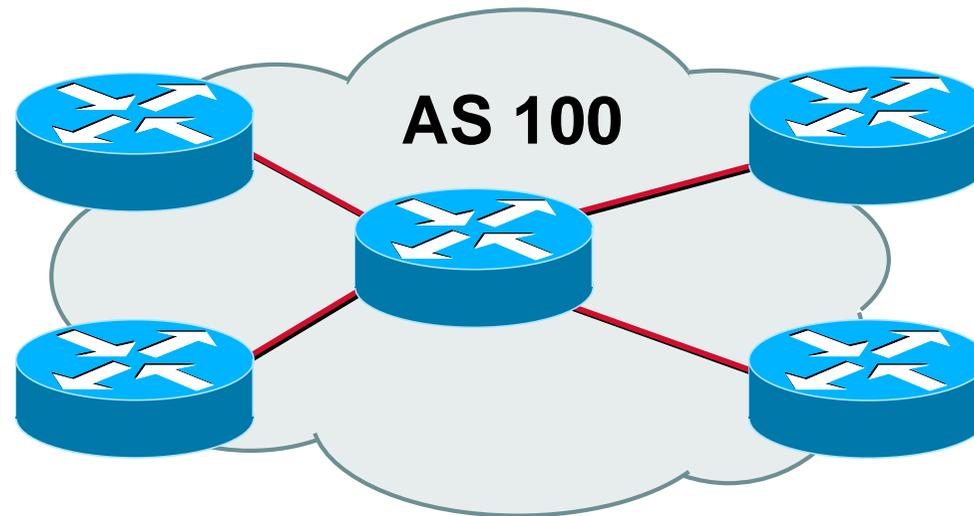

- **Collection of networks with same routing policy**
- **Single routing protocol**
- **Usually under single ownership, trust and administrative control**
- **AS number obtained from RIR or upstream ISP**




Routing Concepts

Routing, Forwarding and Routing Protocols

Routing versus Forwarding

- **Routing = building maps and giving directions**
- **Forwarding = moving packets between interfaces according to the “directions”**

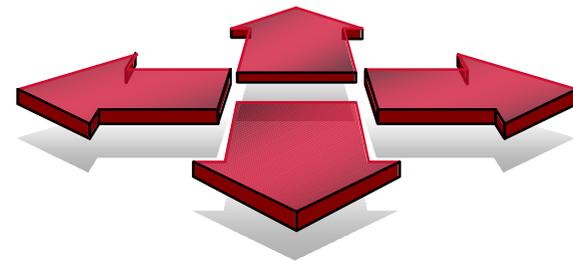

IP Routing - finding the path

- **Path derived from information received from a routing protocol**
- **Several alternative paths may exist**
best next hop stored in **forwarding** table
- **Decisions are updated periodically or as topology changes (event driven)**
- **Decisions are based on:**
topology, policies and metrics (hop count, filtering, delay, bandwidth, etc.)


IP route lookup

- **Based on destination IP packet**
- **“longest match” routing**
more specific prefix preferred over less specific prefix
example: packet with destination of 10.1.1.1/32 is sent to the router announcing 10.1/16 rather than the router announcing 10/8.

IP Forwarding

- **Router makes decision on which interface a packet is sent to**
- **Forwarding table populated by routing process**
- **Forwarding decisions:**
 - destination address**
 - class of service (fair queuing, precedence, others)**
 - local requirements (packet filtering)**
- **Can be aided by special hardware**

Routing Tables Feed the Forwarding Table

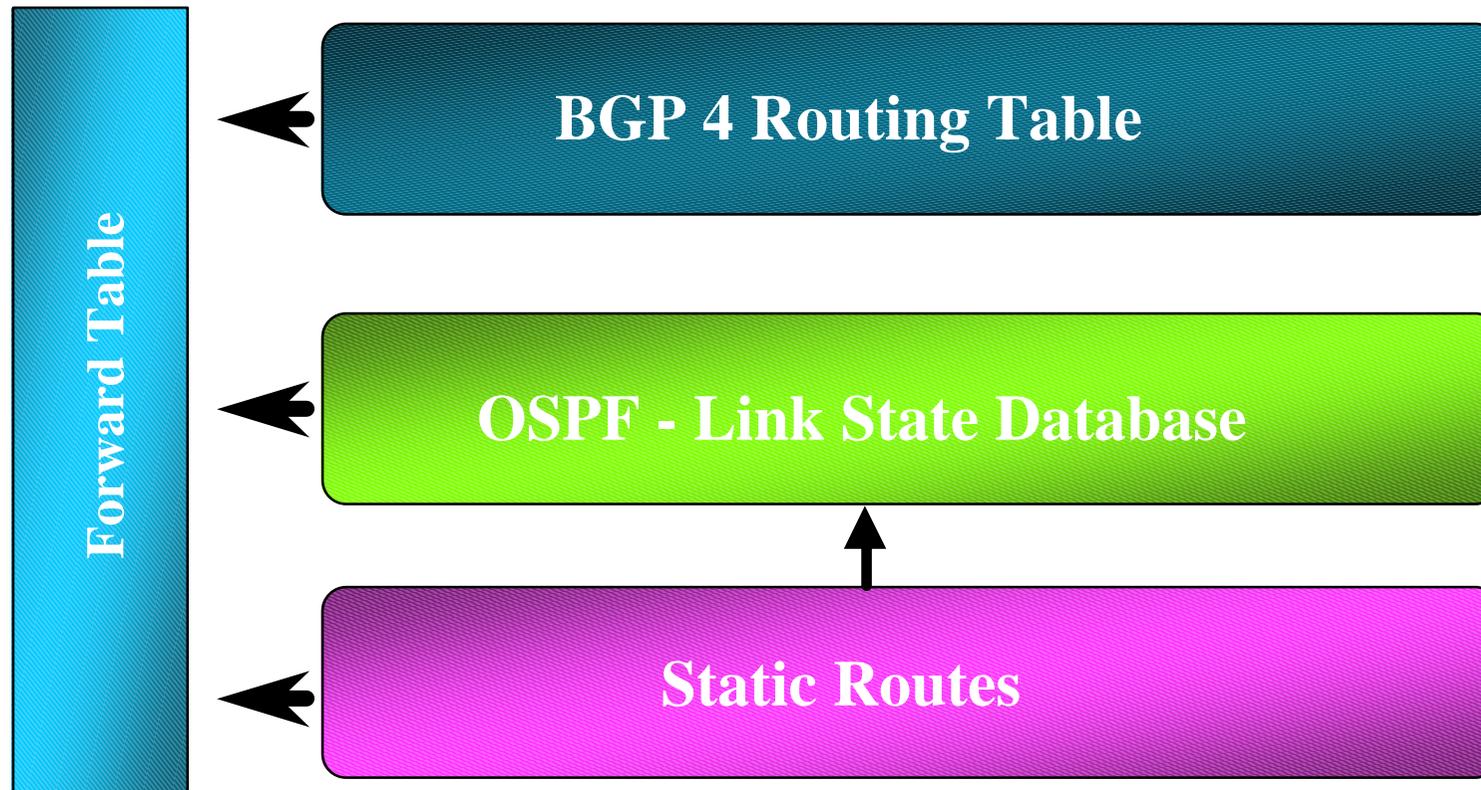

Explicit versus Default routing

- **Default:**
 - simple, cheap (cycles, memory, bandwidth)
 - low granularity (metric games)
- **Explicit (default free zone)**
 - high overhead, complex, high cost, high granularity
- **Hybrid**
 - minimise overhead
 - provide useful granularity
 - requires some filtering knowledge


Egress Traffic

- **How packets leave your network**
- **Egress traffic depends on:**
 - route availability (what others send you)**
 - route acceptance (what you accept from others)**
 - policy and tuning (what you do with routes from others)**
 - Peering and transit agreements**

Ingress Traffic

- **How packets get to your network and your customers' networks**
- **Ingress traffic depends on:**
 - what information you send and to whom**
 - based on your addressing and AS's**
 - based on others' policy (what they accept from you and what they do with it)**

Routing flow and packet flow

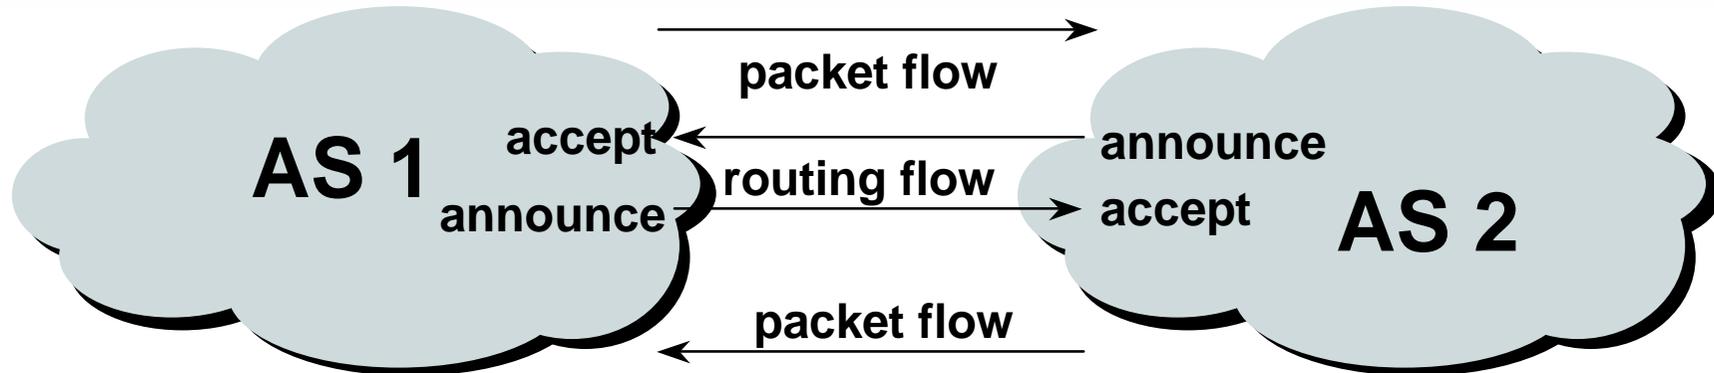

- For networks in AS1 and AS2 to communicate:
 - AS1 must announce to AS2
 - AS2 must accept from AS1
 - AS2 must announce to AS1
 - AS1 must accept from AS2
- Traffic flow is always in the **opposite** direction of the flow of routing information

What Is an IGP?

- **Interior Gateway Protocol**
- **Within an Autonomous System**
- **Carries information about internal prefixes**
- **Examples - OSPF, ISIS, EIGRP...**

What Is an EGP?

- **Exterior Gateway Protocol**
- **Used to convey routing information between Autonomous Systems**
- **De-coupled from the IGP**
- **Current EGP is BGP4**

Why Do We Need an EGP?

- **Scaling to large network**
 - Hierarchy**
 - Limit scope of failure**
- **Policy**
 - Control reachability to prefixes**
 - Merge separate organizations**
 - Connect multiple IGPs**

Interior versus Exterior Routing Protocols

- **Interior**

automatic neighbour discovery

generally trust your IGP routers

routes go to all IGP routers

binds routers in one AS together

- **Exterior**

specifically configured peers

connecting with outside networks

set administrative boundaries

binds AS's together

Interior versus Exterior Routing Protocols

- **Interior**

Carries ISP infrastructure addresses only

ISPs aim to keep the IGP small for efficiency and scalability


- **Exterior**

Carries customer prefixes

Carries Internet prefixes

EGPs are independent of ISP network topology

Hierarchy of Routing Protocols

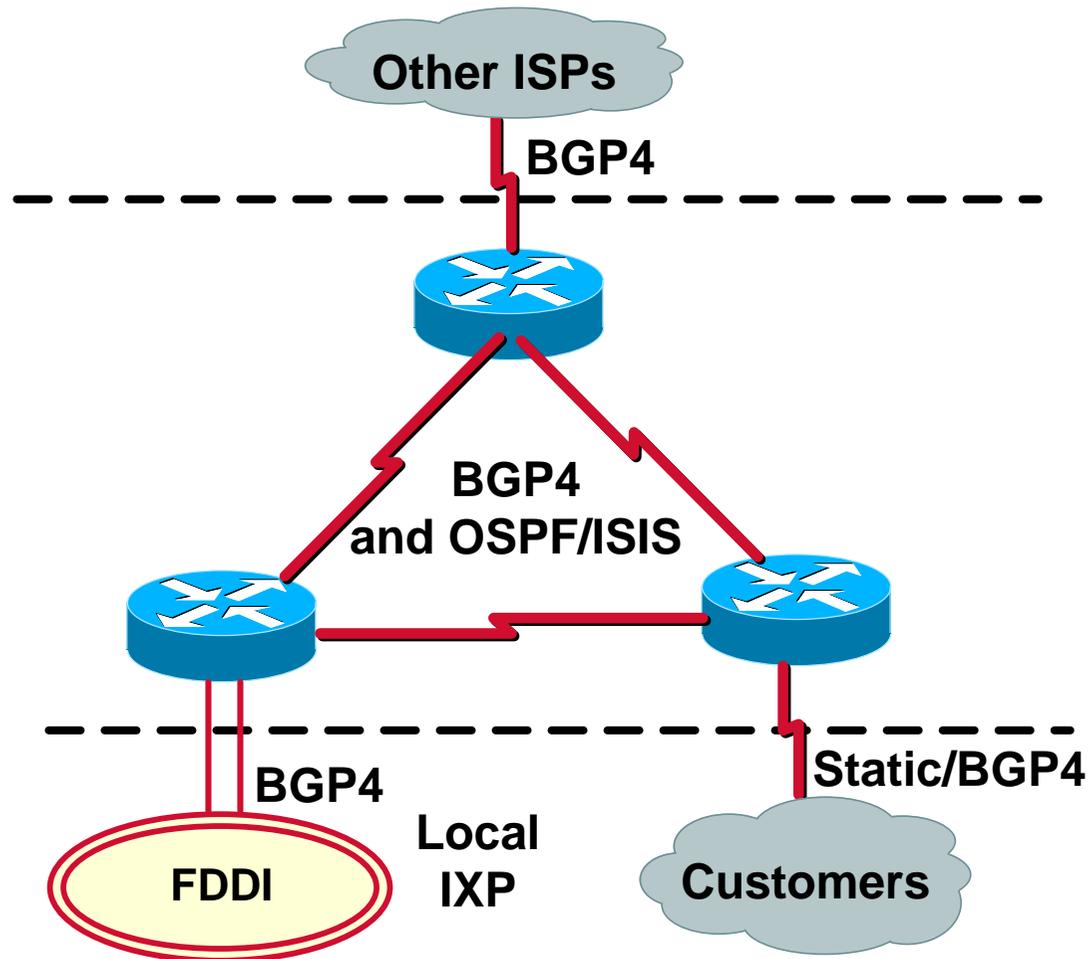



Introduction to IGPs

OSPF and ISIS


ISIS - Intermediate System to Intermediate System

- **Link State Routing Protocol**
- **OSI development now continued in IETF**
- **Supports VLSM**
- **Low bandwidth requirements**
- **Supports two levels**
 - The backbone (level 2) and areas (level 1)**
- **Route summarisation**

OSPF - Open Shortest Path First

- **Link State Routing Protocol**
- **Designed by IETF for TCP/IP - RFC2328**
- **Supports VLSM**
- **Low bandwidth requirements**
- **Supports different types of areas**
- **Route summarisation and authentication**

Why Areas - OSPF Example

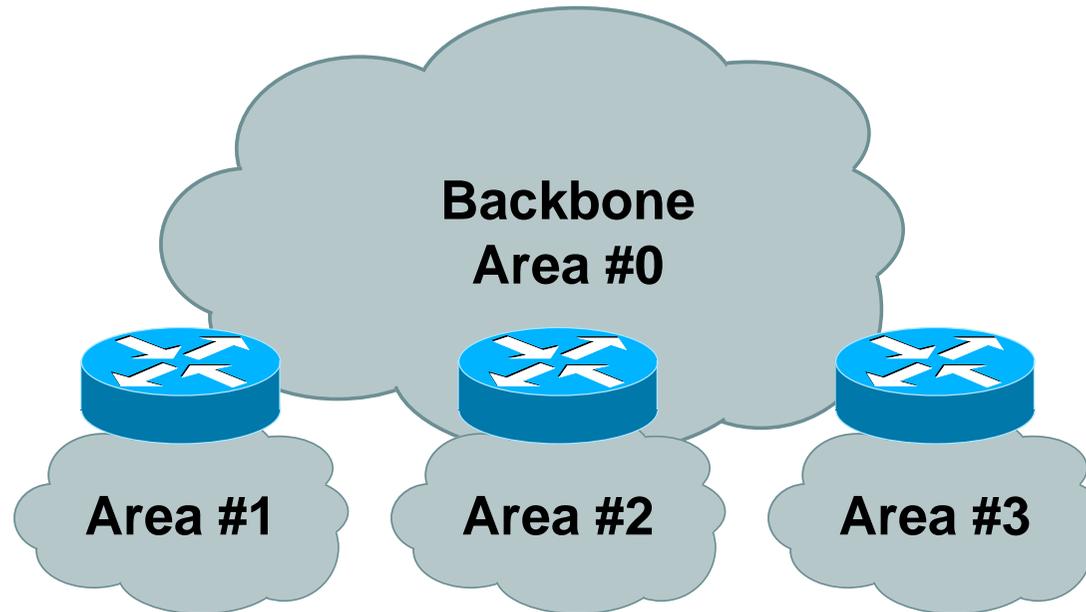

- **Topology of an area is invisible from outside of the area**
- **Results in marked reduction in routing traffic**

Scalable Network Design

- **ISIS**

- Implement level1 - level 2/level 1 hierarchy for large networks only**

- Internet friendly enhanced features**

- **OSPF**

- Implement area hierarchy**

- Enforces good network design**

- **Requires Addressing Plan**


- **Implement Route Summarisation**



BGP Terminology

What is it?

BGP Basics

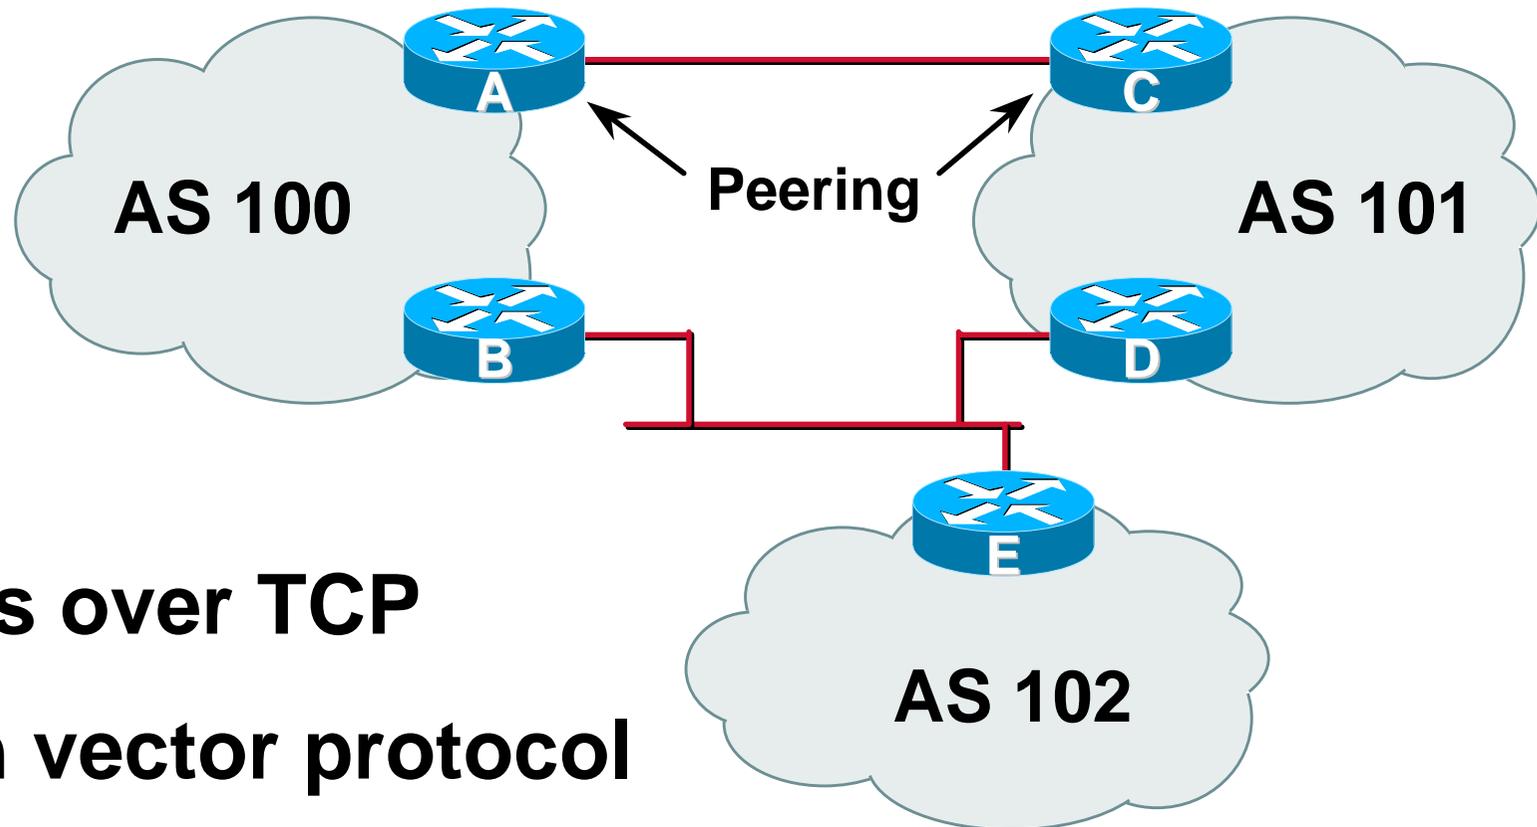


- Runs over TCP
- Path vector protocol
- Incremental update

BGP General Operation


- **Learns multiple paths via internal and external BGP speakers**
- **Picks the best path and installs in the IP forwarding table**
- **Policies applied by influencing the best path selection**

External BGP Peering (eBGP)

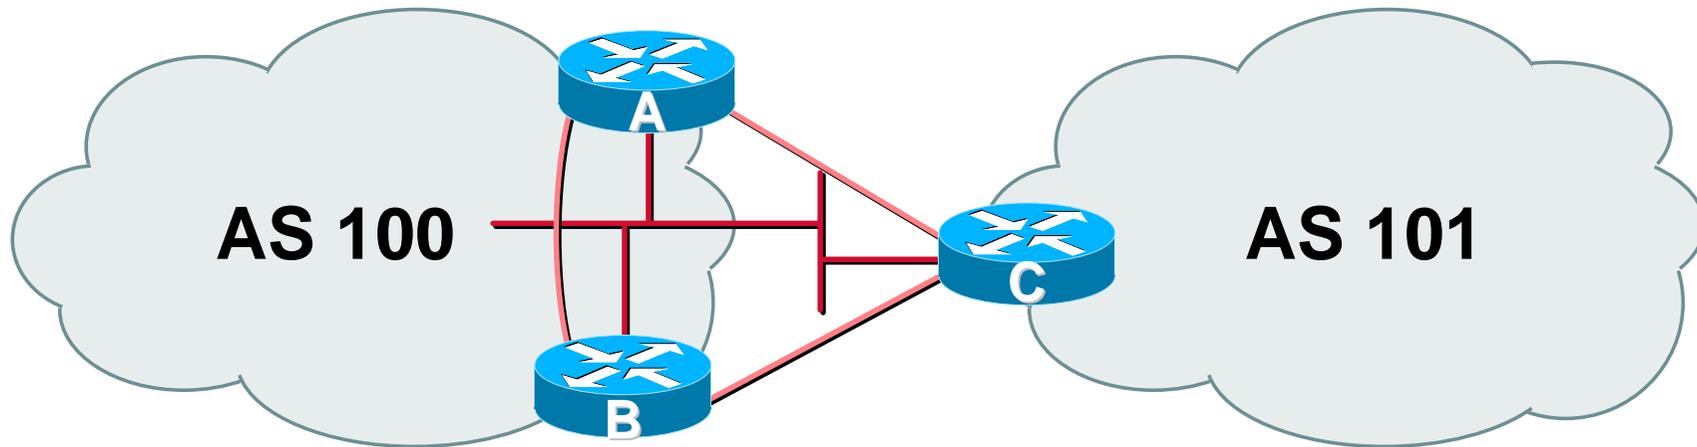


- **Between BGP speakers in different AS**
- **Should be directly connected**

Internal BGP Peering (iBGP)

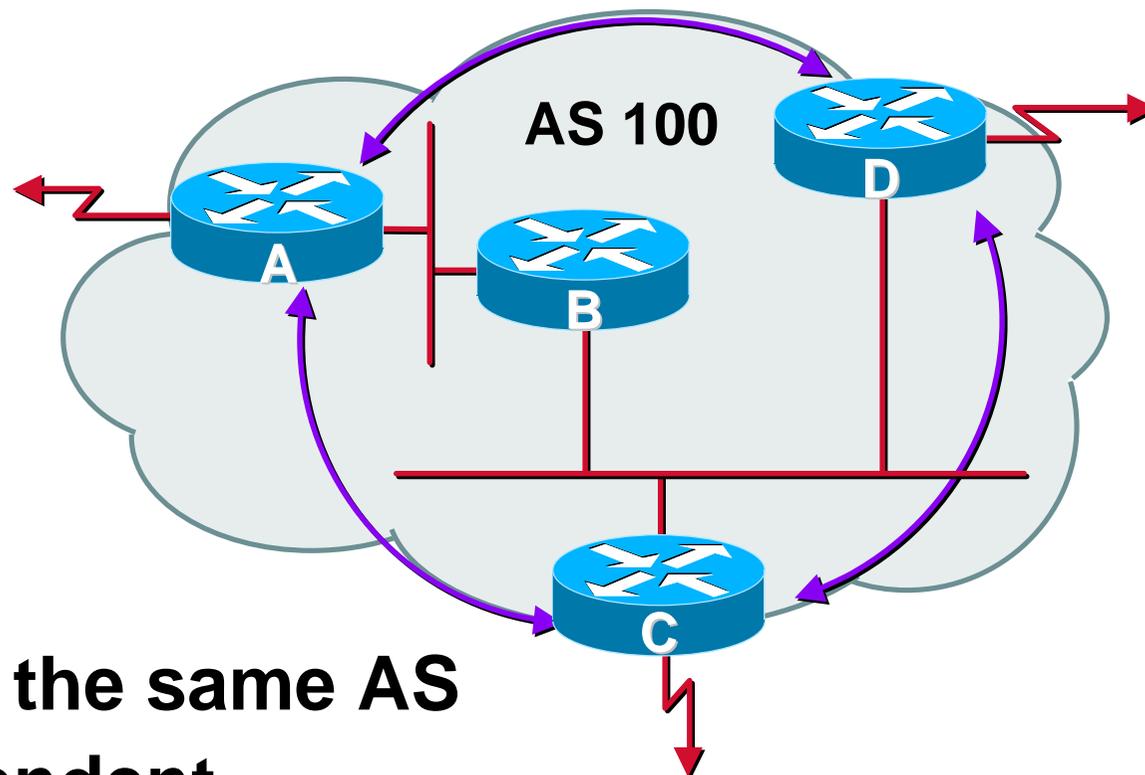

- BGP peer within the same AS
- Topology independent
- Each iBGP speaker must peer with every other iBGP speaker in the AS

Stable iBGP peering - loopback interface

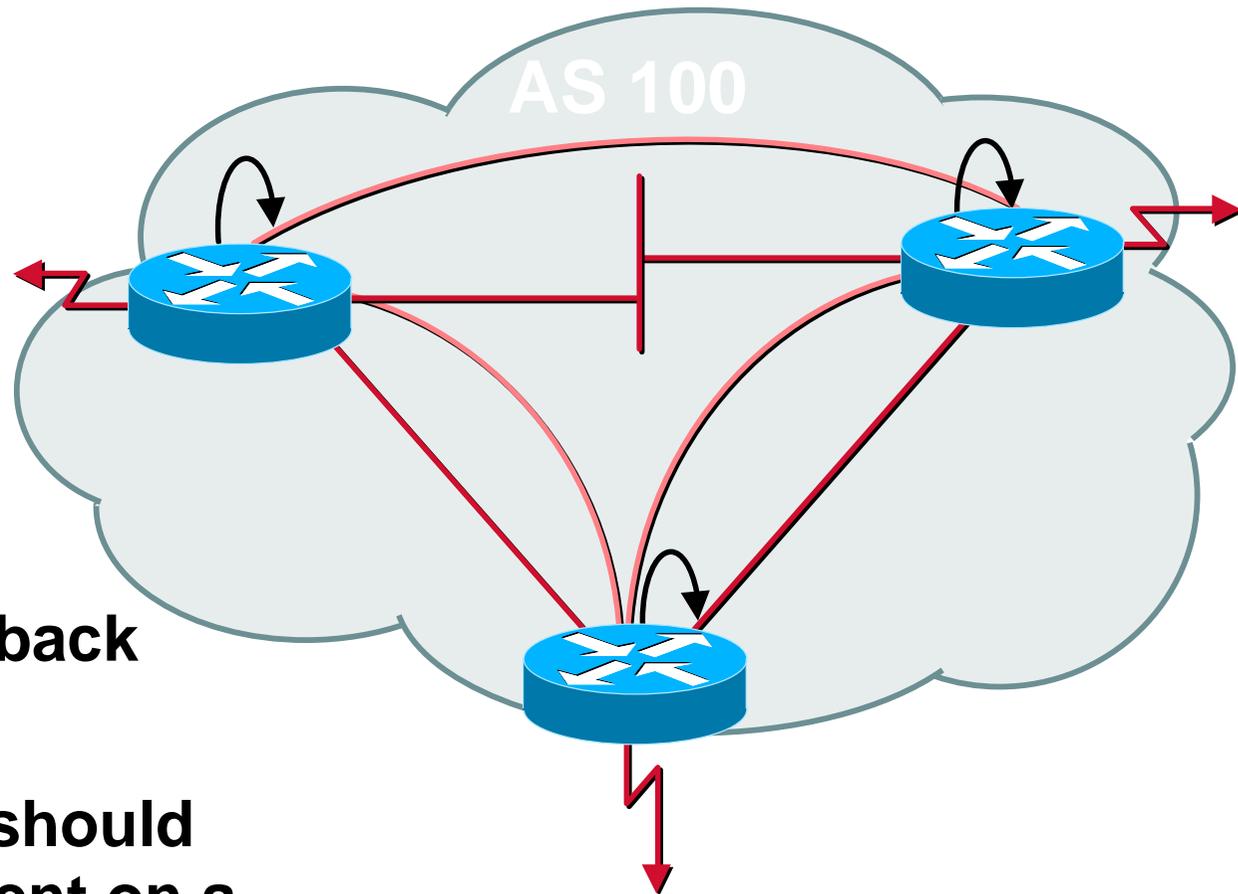

- Peer with loopback interface
- iBGP session should not be dependent on a physical interface

BGP Attributes

- **Describes characteristics of a prefix**
- **Some BGP attributes:**
 - AS path, Next hop, Local preference, Multi-Exit Discriminator (MED), Origin, Aggregator and Community.**
- **Some are mandatory, some are transitive**

BGP Path Selection Algorithm

- **Do not consider path if no route to next hop**
- **Highest local preference (global within AS)**
- **Shortest AS path**
- **Lowest origin code**
IGP < EGP < incomplete

BGP Path Selection Algorithm (continued)

- **Multi-Exit Discriminator**
Considered only if paths are from the same AS
- **Prefer eBGP path over iBGP path**
- **Path with shortest next-hop metric wins**
- **Lowest router-id**

BGP in ISP Backbones

- **All routers take part in BGP**
- **BGP are used to carry**
some or all of the Internet routing table
customer prefixes
- **IGPs are used to carry next hop**
and internal network information
recursive route lookup
- **Routes are **never** redistributed from BGP**
into the IGP or from the IGP into BGP



Scaling Techniques


Bigger better networks!

Scaling Techniques

- **Administrative scaling
(BGP Communities)**
- **Router resource scaling
Route Reflectors
(Confederations)
Route Flap Damping
Dynamic Reconfiguration**

Route Reflector

- Scalable alternative to full iBGP mesh
- Reflector receives path from clients and non-clients
- Selects best path
- Best path is from client—reflect to non-clients
- Best path is from non-client—reflect to clients
- Non-meshed clients

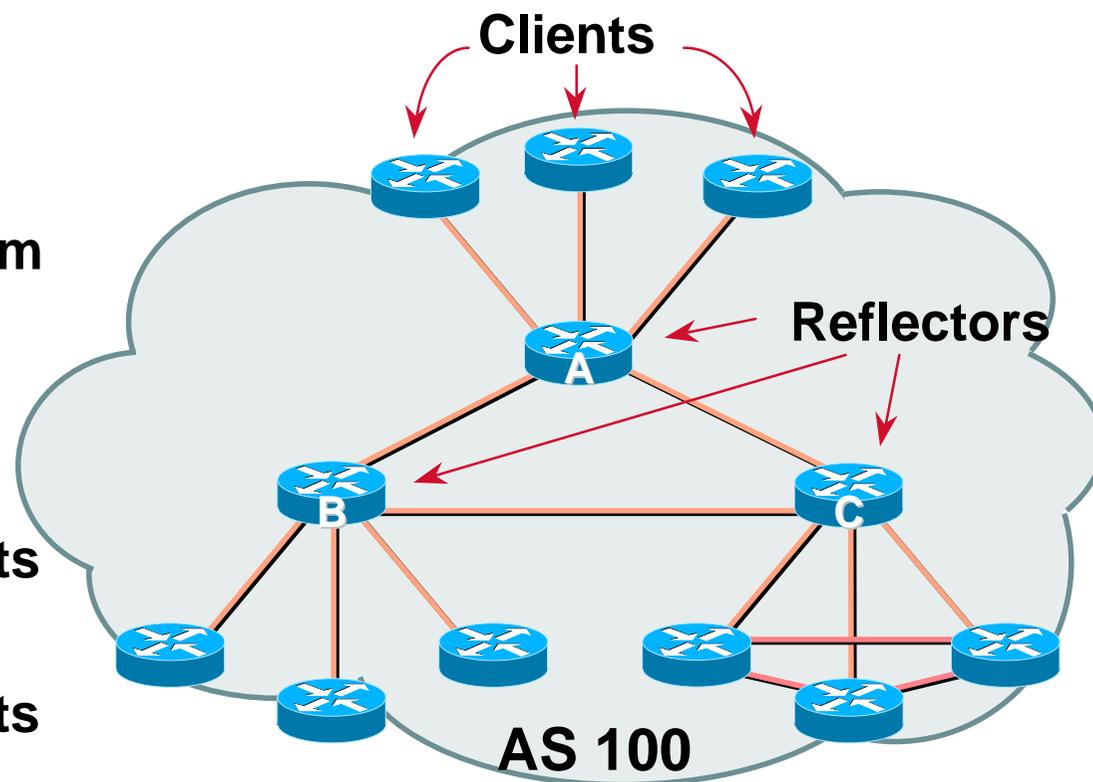


Route Reflector

- **Divide the backbone into multiple clusters (hint - build on OSPF/ISIS areas)**
- **At least one route reflector and few clients per cluster**
- **Route reflectors are fully meshed**
- **Clients in a cluster could be fully meshed**
- **Single IGP to carry next hop and local routes**

Route Reflector: Benefits

- **Solves iBGP mesh problem**
- **Packet forwarding is not affected**
- **Normal BGP speakers co-exist**
- **Multiple reflectors for redundancy**
- **Easy migration**
- **Multiple levels of route reflectors**

Route Reflector: Migration

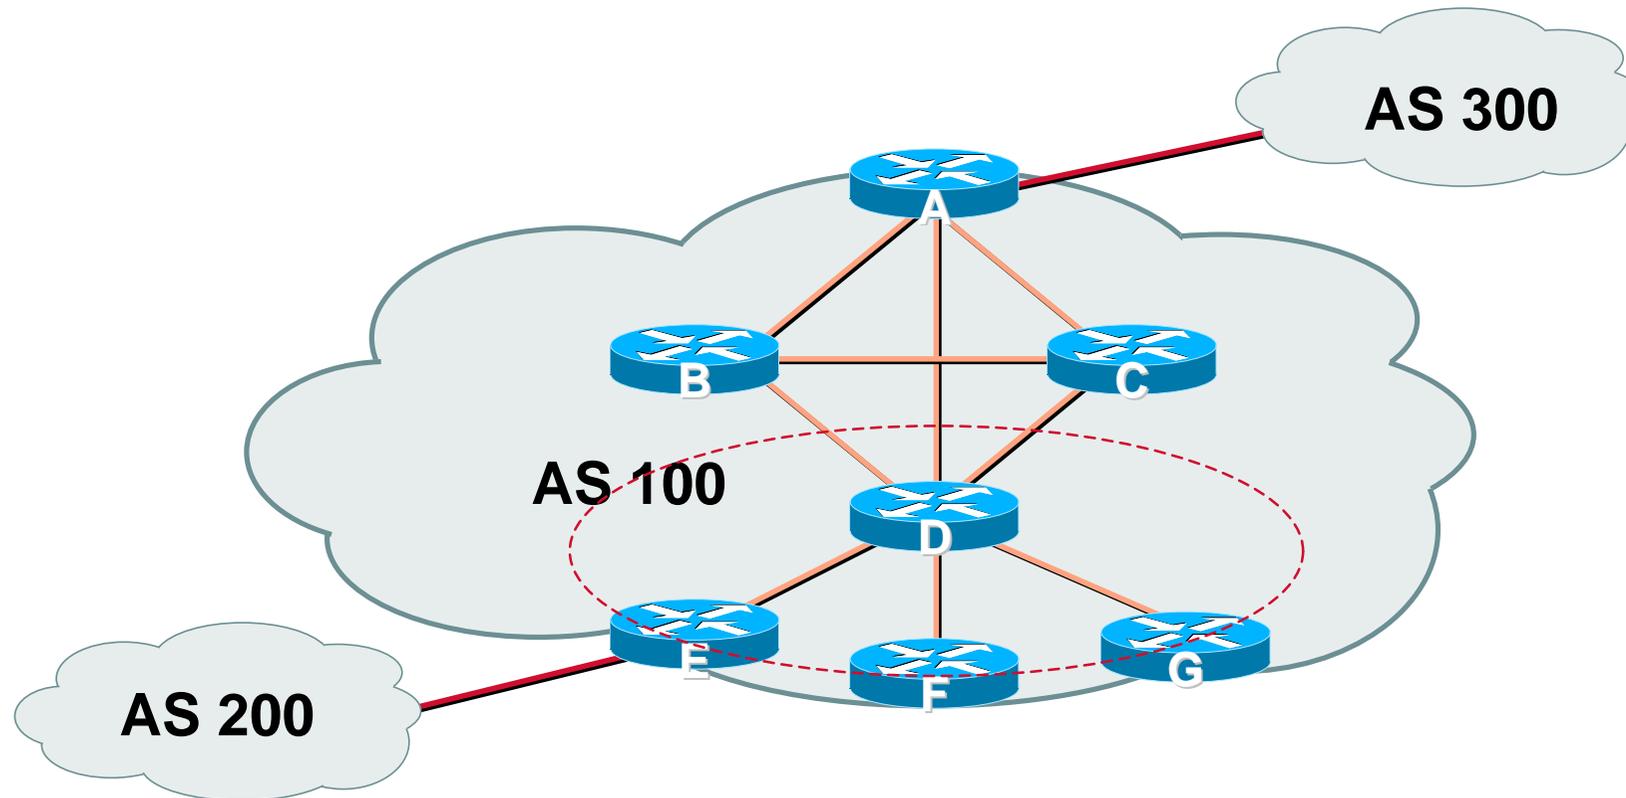

- Migrate small parts of the network, one part at a time.



Route Flap Damping

Stabilising the Network

Route Flap Damping

- **Route flap**

- Going up and down of path or change in attribute**

- BGP WITHDRAW followed by UPDATE = 1 flap**

- eBGP neighbour going down/up is NOT a flap**

- Ripples through the entire Internet**

- Wastes CPU**

- **Damping aims to reduce scope of route flap propagation**


Route Flap Damping (Continued)

- **Requirements**
 - Fast convergence for normal route changes**
 - History predicts future behaviour**
 - Suppress oscillating routes**
 - Advertise stable routes**
- **Implementation described in RFC2439**

Route Flap Damping Operation

- **Add penalty (1000) for each flap**
- **Exponentially decay penalty**
half life determines decay rate
- **Penalty above suppress-limit**
do not advertise route to BGP peers
- **Penalty decayed below reuse-limit**
re-advertise route to BGP peers

Route Flap Damping

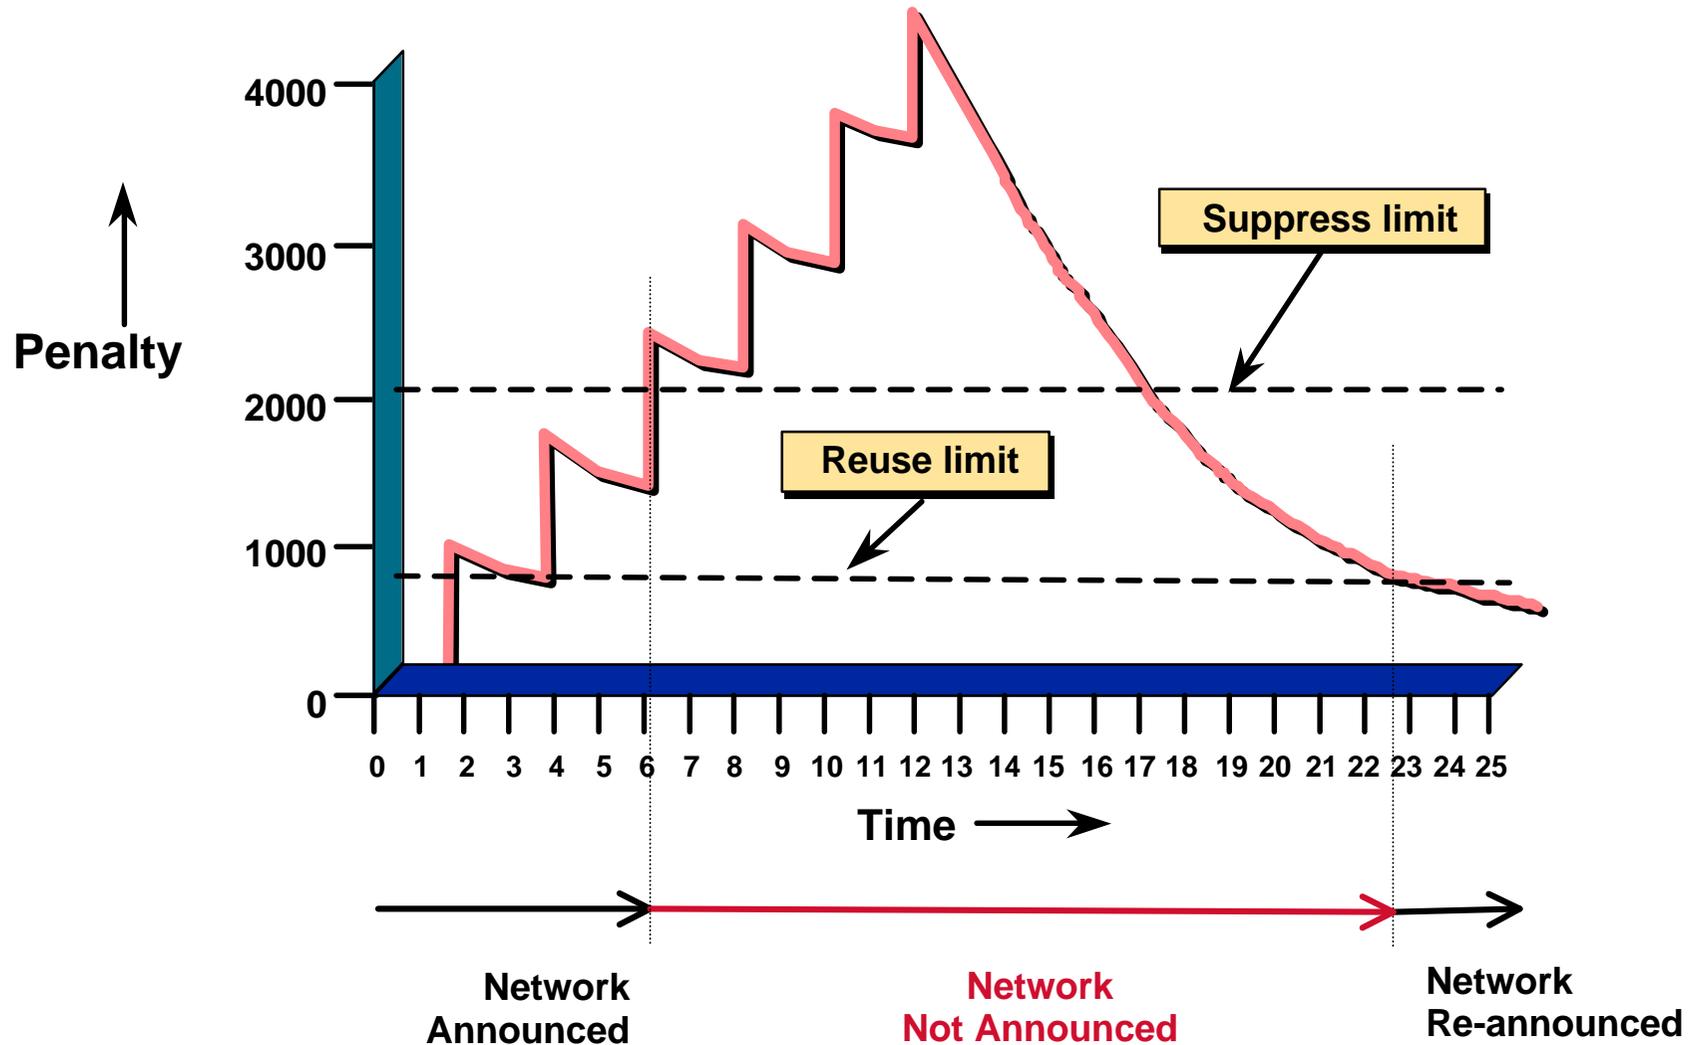

Route Flap Damping Operation

- **Only applied to inbound announcements from eBGP peers**
- **Alternate paths still usable**
- **In Cisco IOS, controlled by:**
 - Half-life (default 15 minutes)**
 - reuse-limit (default 750)**
 - suppress-limit (default 2000)**
 - maximum suppress time (default 30 minutes)**

Route Flap Damping Configuration

- **Examples - ✘**

bgp dampening 30 750 3000 60

reuse-limit of 750 means maximum possible penalty is 3000 - no prefixes suppressed as penalty cannot exceed suppress-limit

- **Examples - ✔**

bgp dampening 30 2000 3000 60

reuse-limit of 2000 means maximum possible penalty is 8000 - suppress limit is easily reached

Flap Dampening: Enhancements

- **Selective dampening based on AS-path, Community, Prefix**

- **Variable dampening recommendations for ISPs**

<http://www.ripe.net/docs/ripe-210.html>

- **Flap statistics in Cisco IOS**

```
show ip bgp neighbor <x.x.x.x> [dampened-routes | flap-statistics]
```



Dynamic Reconfiguration

Soft Reconfiguration and Route Refresh

Soft Reconfiguration


Problem:

- **Hard BGP peer clear required after every policy change because the router does not store prefixes that are denied by a filter**
- **Hard BGP peer clearing consumes CPU and affects connectivity for all networks**

Solution:

- **Soft-reconfiguration**

Soft Reconfiguration

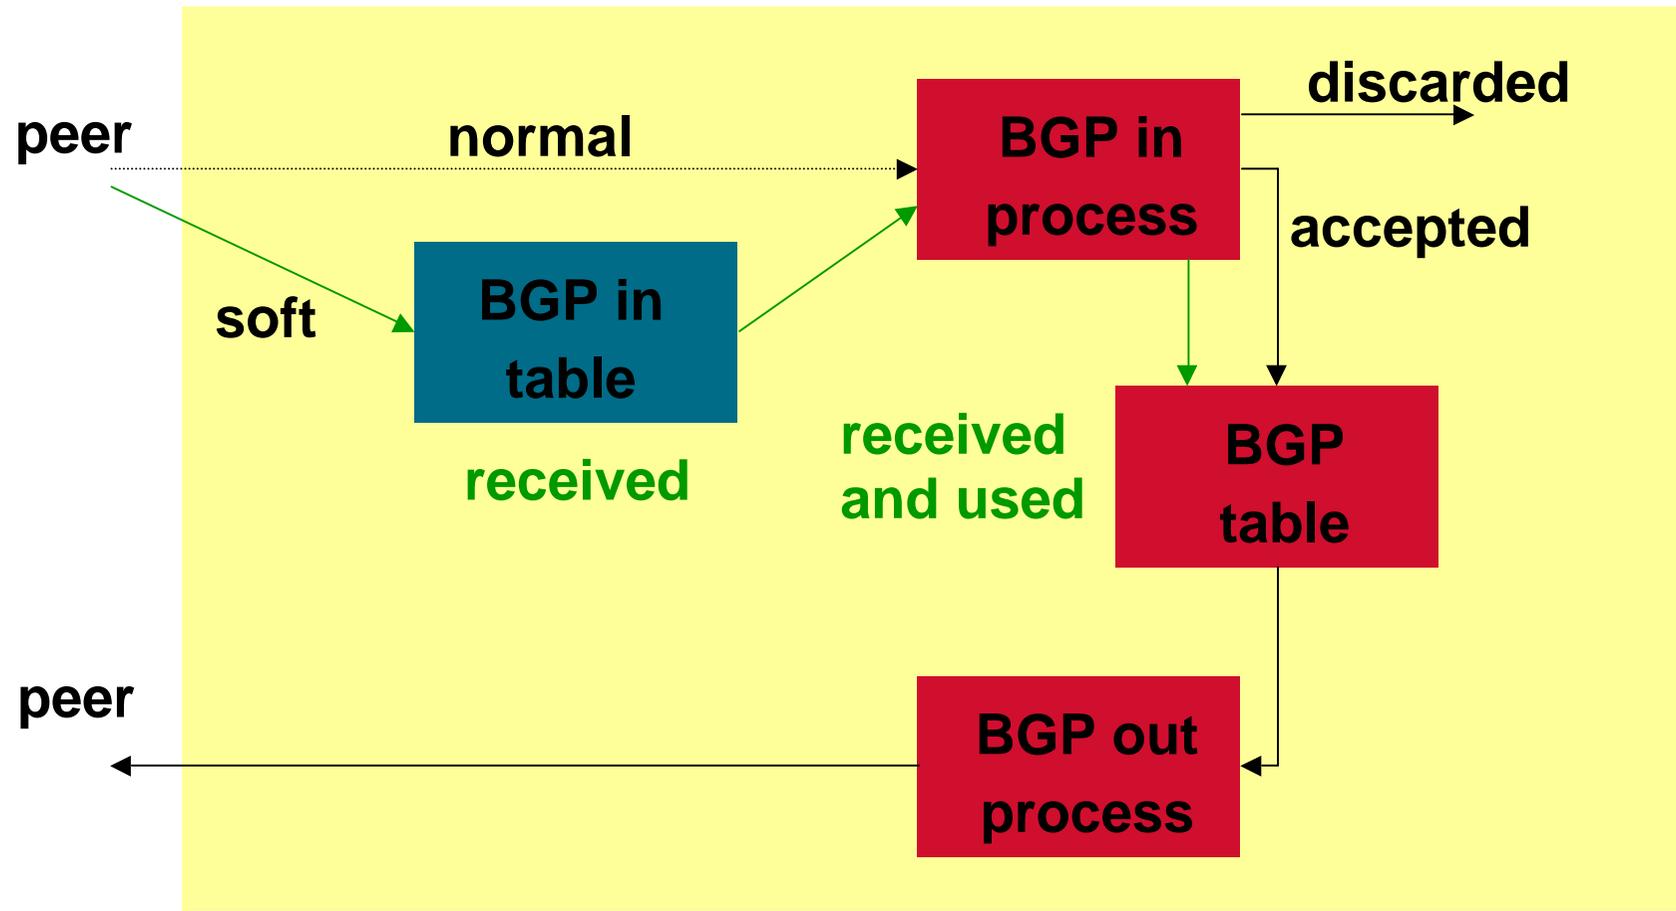

Soft Reconfiguration

- **New policy is activated without tearing down and restarting the peering session**
- **Per-neighbour basis**
- **Use more memory to keep prefixes whose attributes have been changed or have not been accepted**

Configuring Soft reconfiguration

```
router bgp 100
```

```
neighbor 1.1.1.1 remote-as 101
```

```
neighbor 1.1.1.1 route-map infiltrer in
```

```
neighbor 1.1.1.1 soft-reconfiguration inbound
```

! Outbound does not need to be configured !

Then when we change the policy, we issue an exec command

```
clear ip bgp 1.1.1.1 soft [in | out]
```

Route Refresh Capability

- **Facilitates non-disruptive policy changes**
- **No configuration is needed**
- **No additional memory is used**
- **Requires peering routers to support “route refresh capability” - RFC2842**
- **clear ip bgp x.x.x.x in** tells peer to resend full BGP announcement

Soft Reconfiguration vs Route Refresh

- **Use Route Refresh capability if supported**
find out from “show ip bgp neighbor”
does not require additional memory
- **Otherwise use Soft Reconfiguration**
- **Be nice to the Internet!**



Principles of Addressing

Address Space

- Approach upstream ISP or consider RIR membership for address space
- Supply addressing plan when requested
remember Internet is **classless**
addresses assigned according to **need** not **want**
- Assign addresses to backbone and other network layers - remember scalability!
- Some examples follow...

Principles of Addressing

- **Separate customer & infrastructure address pools**

Manageability

Different personnel manage infrastructure and assignments to customers

Scalability

Easier renumbering - customers are difficult, infrastructure is easy

Principles of Addressing

- **Further separate infrastructure**

In the IGP:

p2p addresses of backbone connections

router loopback addresses

Not in the IGP:

RAS server address pools

Virtual web and content hosting LANs

Mail, DNS servers


Principles of Addressing

- **Customer networks**
 - Carry in iBGP**
 - Do not put in IGP – ever!**
- **Do not need to aggregate customer assigned address space**
 - iBGP can carry in excess of 200,000 prefixes, no IGP is designed to do this**

Management - Simple Network

- **First allocation from APNIC**


Infrastructure is known, customers are not
20% free is trigger for next request

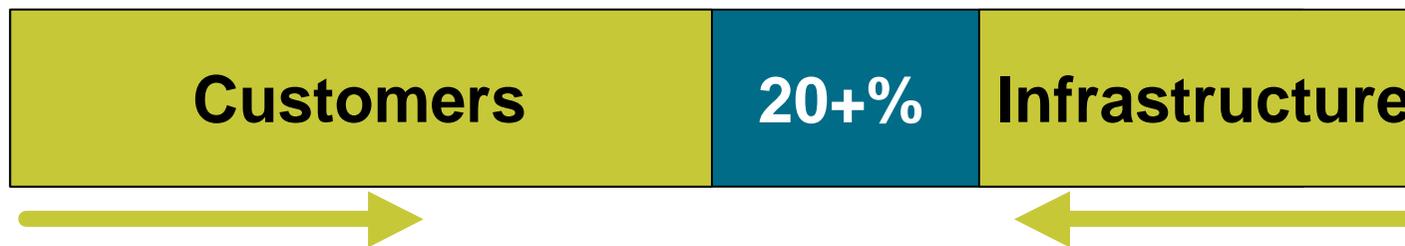

Grow usage of blocks from edges
Assign customers sequentially

Management - Simple Network

- **If second allocation is contiguous**

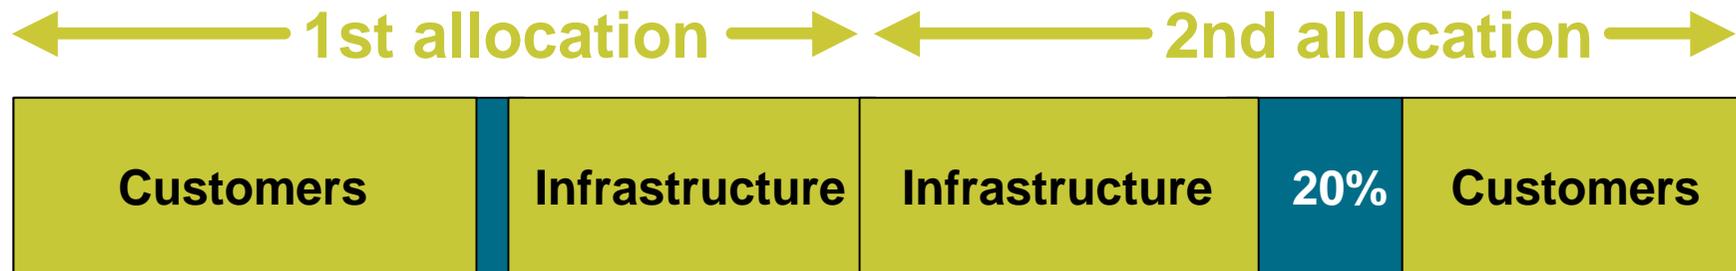

Reverse order of division of first block


Maximise contiguous space for infrastructure

Easier for debugging

Customer networks can be discontinuous

Management - Many POPs


WAN link to single transit ISP

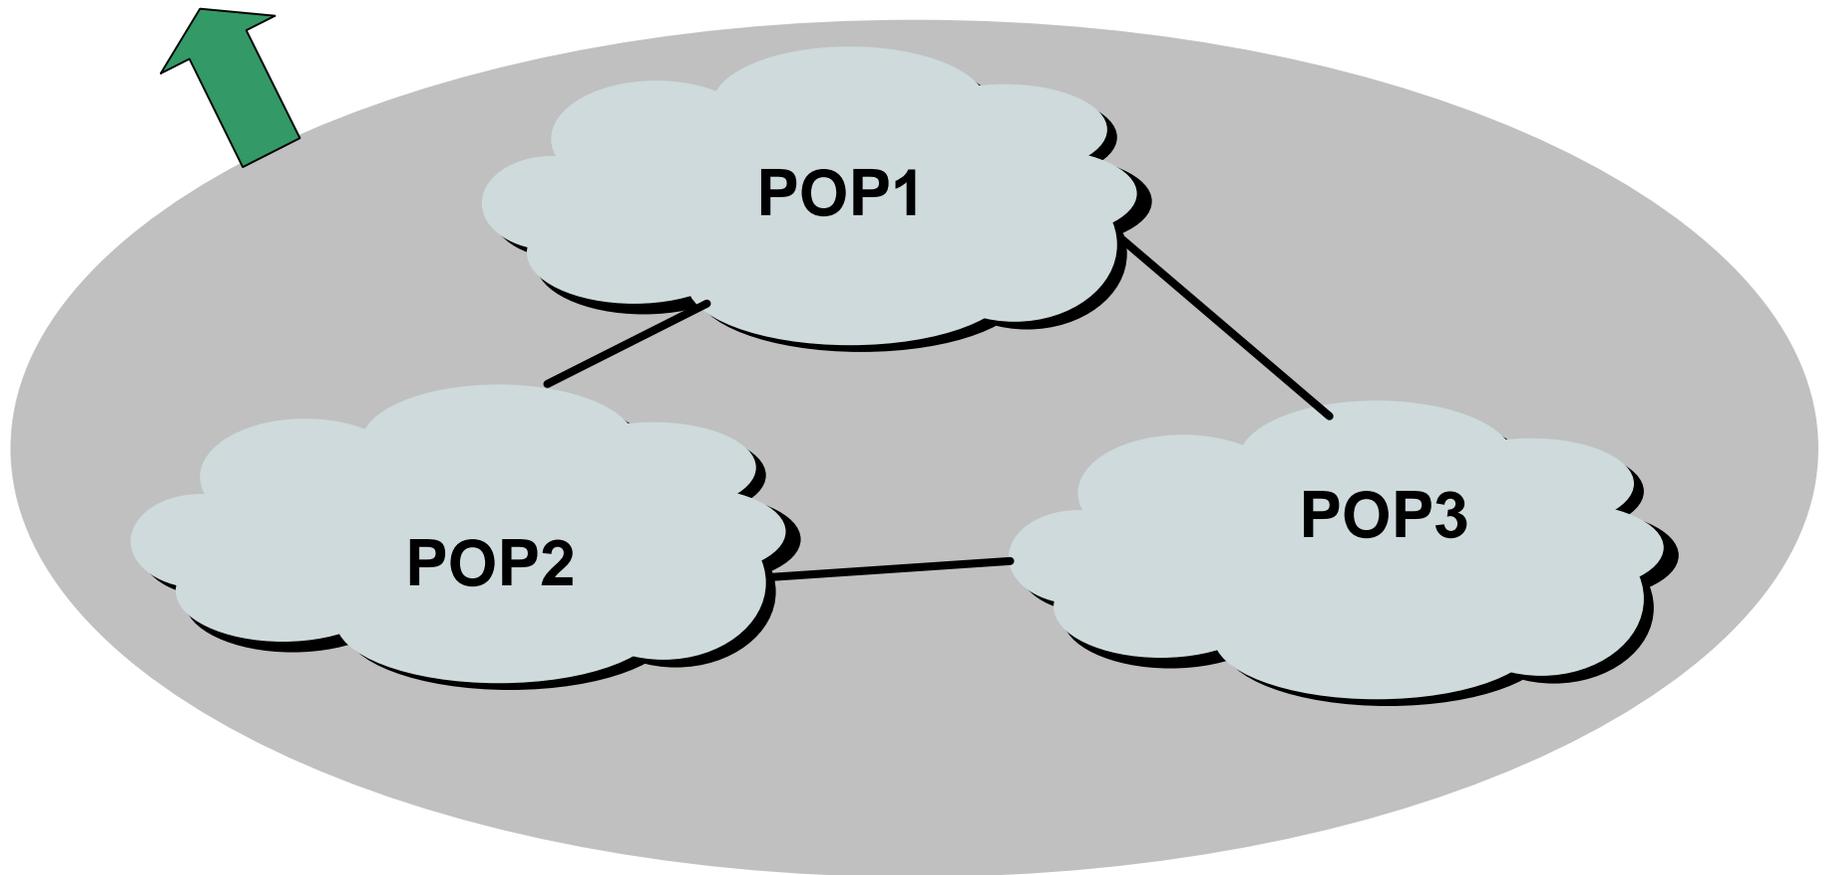

Management - Many POPs

- **POP sizes**

Choose address pool for each POP according to need

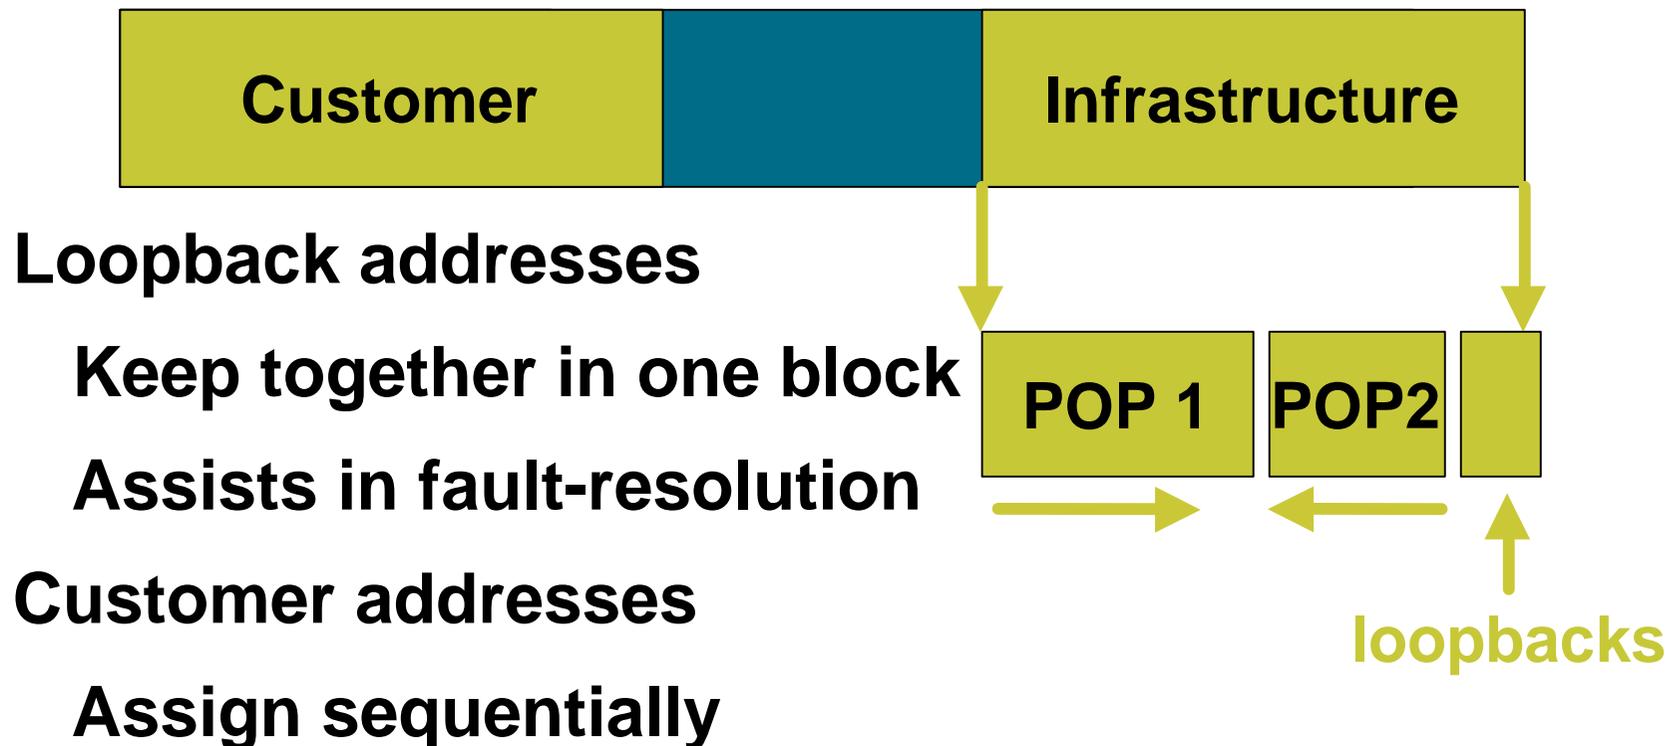


Management - Many POPs

- **/20 minimum allocation is not enough for all your POPs?**
 - Deploy addresses on infrastructure first**
- **Common mistake:**
 - Reserving customer addresses on a per POP basis**
- **Do not constrain network plans due to lack of address space**
 - Re-apply once address space has been used**
 - There is plenty of it!**


Management - Multiple Exits

- **WAN links to different ISPs**

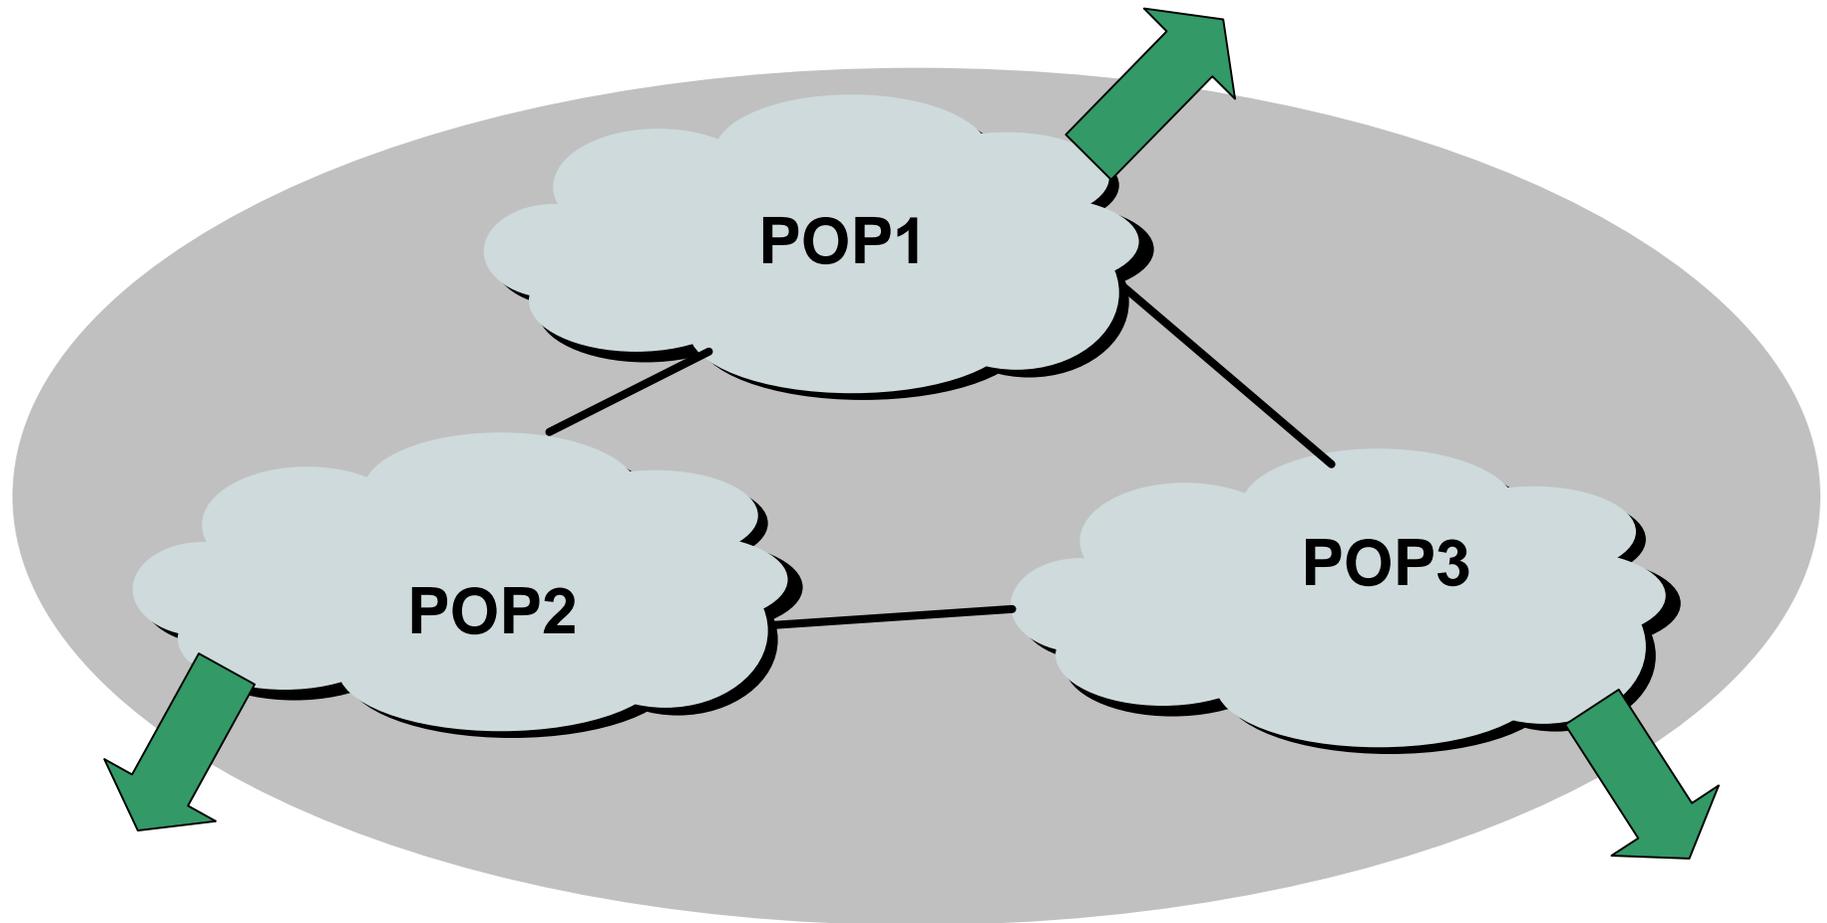

Management - Multiple Exits

- Create a 'national' infrastructure pool

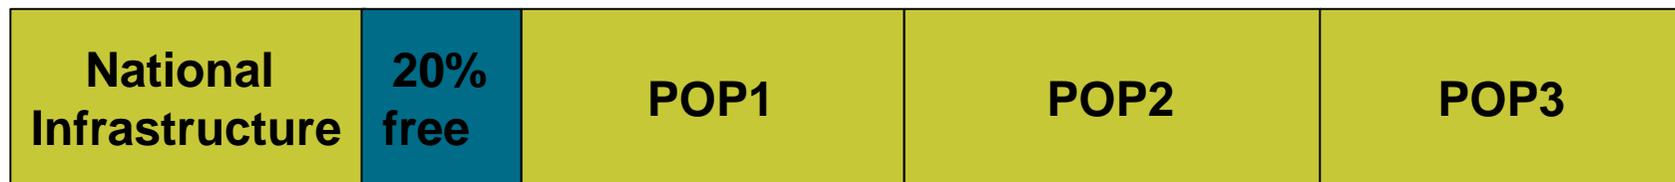

Carry in IGP

E.g. loopbacks, p2p links, infrastructure connecting routers and hosts which are multiply connected

On a per POP basis

Consider separate memberships if requirement for each POP is very large from day one.



Routing Design for ISPs

Network Design

- **Aim for simplicity, scalability and reliability**
- **Plan the network coverage**
- **Estimate growth over the next year**
- **Design the network**

Network Coverage

- **Where will you start and how?**
- **Where will it grow?**
 - One year is a long time in the Internet**
 - Future PoP sites**
- **How big will it grow?**
 - Inter-site bandwidth availability**
- **Does it match the business plan?**

Network Design

- **Start as you mean to continue**
- **Design scalability from day one**
hierarchy
separate functions
- **Choose your IGP carefully**
scalability, standards
knowledge and expertise

Designed in Redundancy

- **Design goal should be **two of everything****
 - **Each site should have at least two backbone WAN connections**
 - **Consider two core routers for each backbone site**
- **Out of Band management network**
- **Test lab/network**
- **Documentation!**

Deploying IGP

- **Keep IGP small!**

Smaller IGP, faster convergence in case of link problems

Use BGP for customer prefixes, dial pools, and other networks

- **Use summarisation between areas of network hierarchy**

- **Use `ip unnumbered` where possible**

External Connections

- **Don't need BGP from day one**
apply for an AS and deploy BGP only when it is needed i.e. when multihoming
- **When deploying BGP**
iBGP carries customer networks only
IGP carries network link information only
Do **not** distribute BGP routes into IGP and vice-versa



Routing Etiquette

Being a good Internet citizen

“Problems on the Internet”

- **Concern about rate of Internet growth**

<http://www.isc.org/ds/>

- **Large number of routes**

<http://www.employees.org/~tbates/cidr.plot.html>


- **Routing instability**

<http://www.merit.edu/ipma/reports>

- **Difficulties diagnosing problems**

- **Quality of Service??**

Growth in BGP Route Table

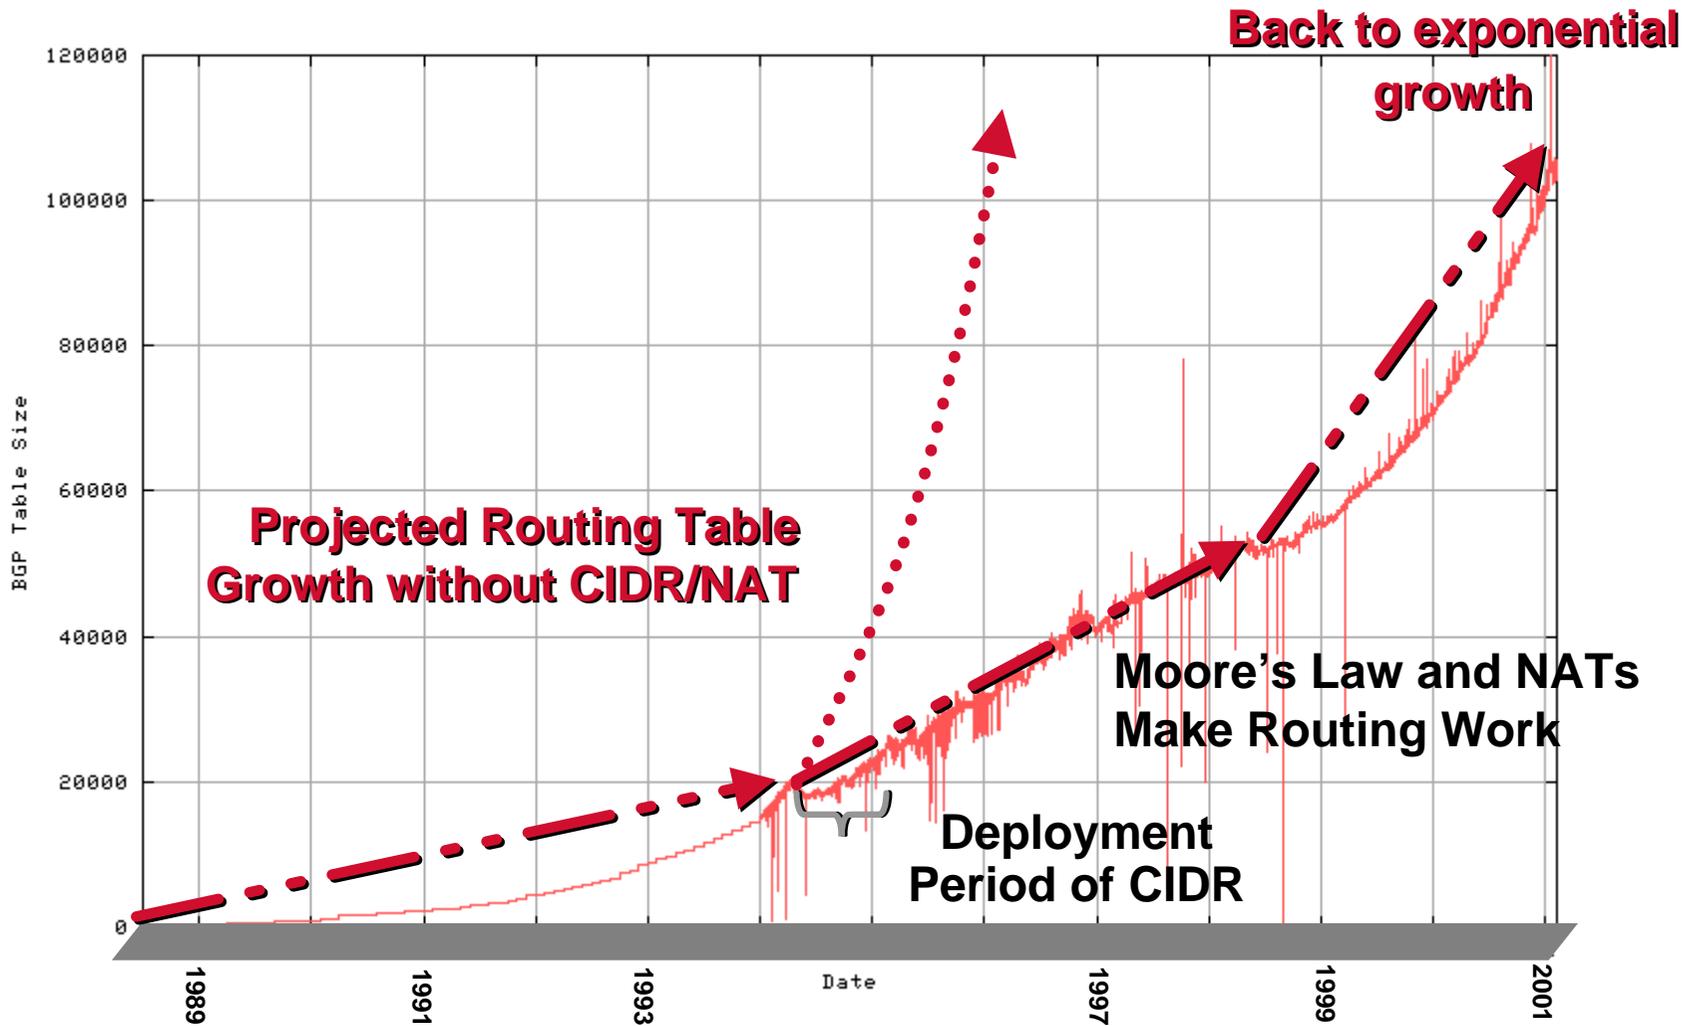

Source: <http://www.telstra.net/ops/bgptable.html>

Effects of CIDR on Internet

- **Currently around 100000 routes**
Still too big
- **If Internet were unaggregated**
Would be over 300000 networks (?)
May have run out of IPv4 addresses
What size of routers required?
How stable would the Internet be?

CIDR - Examples

- **Must** announce network block assigned by RIR or upstream ISP
- Do **not** announce subnets of network block, or subnets of other ISPs' network blocks unless exceptional circumstances
- On Cisco routers use
redistribute static, or aggregate-address, or network/mask pair

CIDR – Examples

**Redistribute
static**

```
router bgp 1849
network 194.216.0.0
redistribute static
! Must have a matching IGP route
ip route 194.216.0.0 255.255.0.0 null0
```

**Aggregate
address**

```
router bgp 1849
network 194.216.0.0
aggregate-address 194.216.0.0 255.255.0.0
! More specific route must exist in BGP table
```

**Network/mask
pair**

```
router bgp 1849
network 194.216.0.0 mask 255.255.0.0
! Must have a matching IGP route
ip route 194.216.0.0 255.255.0.0 null0
```

CIDR - Positive Efforts

- **Most ISPs now filter all prefixes longer than /24**
- **Some ISPs pay attention to Tony Bates' CIDR report**
- **Some ISPs filter according to policy registered in the Internet Routing Registry**
- **No aggregation or bad aggregation could result in no connectivity**

Aggregation

- **Announce aggregate to rest of Internet**
- **Put it into Routing Registry (route object)**
- **Keep more specifics internal to network**
 - Use iBGP for carrying customer networks**
 - Use IGP for carrying backbone addresses**
 - Aggregate internally when possible**

Aggregation - Good Example

- **Customer link goes down**
their /26 network becomes unreachable
- **/19 aggregate is still being announced**
no BGP hold down problems
no BGP propagation delays
no dampening by other ISPs

Aggregation - Good Example

- **Customer link returns**
- **Their /26 network is visible again**
- **The whole Internet becomes visible immediately**
- **Quality of Service perception**

Aggregation - Bad Example

- **Customer link goes down**
 - Their /23 network becomes unreachable**
- **Their ISP doesn't aggregate their /19 network block**
 - /23 network withdrawal announced to peers**
 - starts rippling through the Internet**
 - added load on all Internet backbone routers as network is removed from routing table**

Aggregation - Bad Example

- **Customer link returns**

Their /23 network is now visible to their ISP

Their /23 network is re-advertised to peers

Starts rippling through Internet

Load on Internet backbone routers as network is reinserted into routing table

Some ISP's dampen flaps

Internet may take 10-20 min or longer to be visible

Quality of Service???

Aggregation - Summary

- **Good example is what everyone should do!**

Adds to Internet stability

Reduces size of routing table

Reduces routing churn

Improves Internet QoS for **everyone**

- **Bad example is what many still do!**

Laziness? Lack of knowledge?

“The New Swamp” – Feb 2001

- Areas of poor aggregation
- 192/3 space contributes 78000 networks - rest of Internet contributes 22000 networks

Block	Networks	Block	Networks	Block	Networks	Block	Networks
192/8	6602	200/8	2902	208/8	4987	217/8	400
193/8	2908	201/8	0	209/8	5392	24/8	1466
194/8	3122	202/8	4174	210/8	1445	61/8	230
195/8	1839	203/8	7280	211/8	882	62/8	575
196/8	604	204/8	5023	212/8	2193	63/8	2833
197/8	0	205/8	3395	213/8	1049	64/8	3423
198/8	4853	206/8	4523	214/7	23	65/8	283
199/8	4462	207/8	4583	216/8	5391	66/8	470

“The New Swamp” – July 2000

- **192/3 space contributes 69000 networks - rest of Internet contributes 16000 networks**

Block	Networks	Block	Networks	Block	Networks	Block	Networks
192/8	6352	200/8	2436	208/8	4804	12/8	1047
193/8	2746	201/8	0	209/8	4755	24/8	1122
194/8	2963	202/8	3712	210/8	1375	61/8	80
195/8	1689	203/8	5494	211/8	532	62/8	428
196/8	525	204/8	4694	212/8	1859	63/8	2198
197/8	0	205/8	3210	213/8	635	64/8	1439
198/8	4481	206/8	4206	214/7	14		
199/8	4084	207/8	3943	216/8	4177		

Original Swamp Cause

- **Early growth of Internet**
- **Classful network allocation**
- **Small number of connected networks**
- **Lack of foresight by all**

New Swamp Persists

- **Lazy or technically naïve ISPs**
 - announcing 32 /24s rather than /19 aggregate block
 - announcing customer prefixes as they connect rather than aggregate block only
- **Poorly thought out multihoming**
- **Technical solutions keep ahead of problem so far:**
 - faster routers, more memory, CIDR

Solutions

- **Don't route other ISP's address space unless in failure mode during multihoming**
- **Aggregate!**
- **Don't announce subprefixes of your assigned block**
- **Be prudent when announcing small prefixes out of former A and B space**

Solutions

- **Encourage other ISPs to be good citizens**
don't route their bad citizenship
- **Multihoming**
fragments address space
think carefully about set up and requirements
load balancing versus resilience
<http://infopage.cw.net/Routing>

Efforts

- **Tony Bates' CIDR report**
sent to nanog, apops and eof mail lists
- **Routing Report**
sent to APOPS, ARIN rtma and RIPE routing-wg
- **Regional Internet Registries**
- **Many ISPs still care**
- **Peer pressure**
- **YOU!**

Renumbering - motivation

- **Same as motivation for aggregation**
holes are bad, using swamp space
- **First time Internet connection**
legal address space, practical addressing scheme
- **New Provider**
renumber into new provider's block
reduces fragmentation and improves routability

Renumbering - how to?

- **PIER - Procedures for Internet and Enterprise Renumbering**

<http://www.isi.edu/div7/pier/papers.html>

- **Be aware of effect on essential services**
e.g. DNS ttl requires lowering, router filters
- **Use DHCP, secondary addressing**
- **Not difficult but needs planning**

Route Flap Damping

- **Route Flap**
technical description earlier
- **Many ISPs now suppress route flaps at network borders**
- **Cisco BGP Case Study at**
<http://www.cisco.com/warp/public/459/16.html>
- **Recommended parameters are at**
<http://www.ripe.net/docs/ripe-210.html>

Route Flap Damping - Caution

- **Be aware of potential problems**
- **Unreachability could be due to dampening, not disconnection**
- **Border routers need more memory and CPU**
- **Train your staff!**

Filtering Policies

- **Filter announcements by peers**
 - AS list, prefixes
- **Only accept what is listed in routing registry**
 - avoids configuration errors and routing problems
 - authorisation?
- **Only announce what you list in routing registry**
- **Keep routing registry and filters up to date**

“Documenting Special Use Addresses” - DSUA

- **Private and Special Use addresses must be blocked on all BGP peerings, in and out:**

<http://www.ietf.org/internet-drafts/draft-manning-dsua-06.txt>

```
ip prefix-list private-sua deny 0.0.0.0/8 le 32
ip prefix-list private-sua deny 10.0.0.0/8 le 32
ip prefix-list private-sua deny 127.0.0.0/8 le 32
ip prefix-list private-sua deny 169.254.0.0/16 le 32
ip prefix-list private-sua deny 172.16.0.0/12 le 32
ip prefix-list private-sua deny 192.0.2.0/24 le 32
ip prefix-list private-sua deny 192.168.0.0/16 le 32
ip prefix-list private-sua deny 224.0.0.0/3 le 32
ip prefix-list private-sua deny 0.0.0.0/0 ge 25
ip prefix-list private-sua permit 0.0.0.0/0 le 32
```

A man in a white shirt and red tie is holding a large red cable that arches over a globe. The globe is positioned in the lower half of the frame, with the man standing on top of it. The background is a textured, multi-colored surface in shades of blue, yellow, and green.

The Internet Routing Registry



Definition

- **“A public authoritative distributed repository of routing information”**

Public databases

Distributed repository of information


Have authoritative data

Vendor independent

Composition

- **Routing Policy Details**
- **Routes and their aggregates**
- **Topology Linking AS's**
- **Network components such as routers**
- **Is separate from other information such as domains and networks**

Entities of the IRR

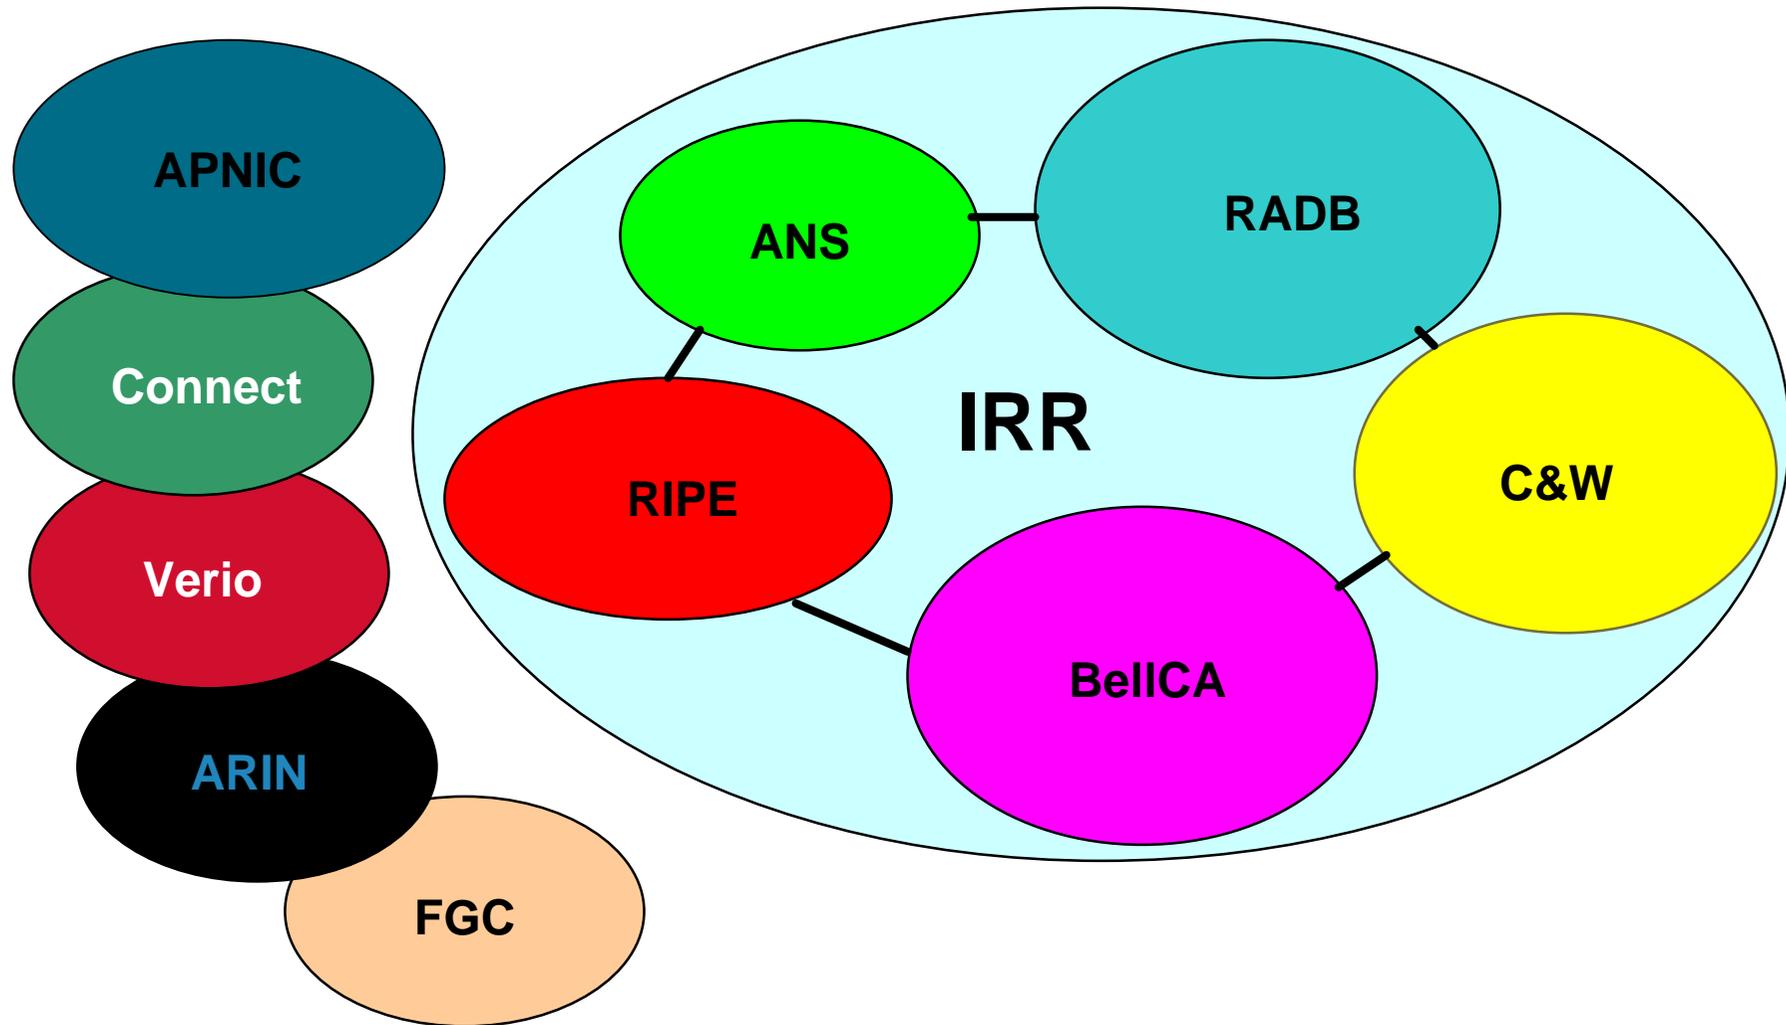

Relationship Table

Registry	Routing Policy	Routes	Networks	Domains
APNIC	Yes	Soon	Yes	No
RIPE	Yes	Yes	Yes	No
RADB	Yes	Yes	No	No
C&W	Yes	Yes	No	No
ANS	Yes	Yes	No	No
BellCA	Yes	Yes	No	No
ARIN	Yes	Yes	Yes	No
“InterNIC”	No	No	No	Yes

Relationships

- **37 RRs around the world**
- **C&W, ANS and BellCA - provider run RRs**
Other RRs run by Verio, FGC, Connect, etc...
- **RIPE RR - European providers**
- **ARIN RR - launched 8 February 1999**
- **RADB - Default RR for rest of world**
- **APNIC - plans to be full member of IRR very soon.**

Benefits of an IRR

- **Operational Support**
- **Information**
- **Configuration**
- **Problem diagnosis**
- **Improved Service Quality**
- **Tools for consistency checking**

Information

- **Routing policy repository**
- **“Map of global routing topology”**
- **Routing policy between neighbouring AS's**
- **Device independent description of routing policy**

Configuration

- **Supports network filtering**
- **Configures routers and policies**
- **Revision control**
- **Sanity checking**
- **Simulation**

Improved Quality of Service

**All this adds up to improved
quality of service**

Participation is essential!



RIPE-181

**The language of the
Internet Routing Registry**


Key Objects and Syntax of RIPE-181

- **Representation**
- **AS Object**
- **AS Macro**
- **Route Object**
- **Authorisation - Maintainer Object**

Representation

- **ASCII printable**
- **Attributes by `tag:value` lines**
- **Objects separated by empty lines**
- **RIPE-181 and RPSL**

Real World Example!

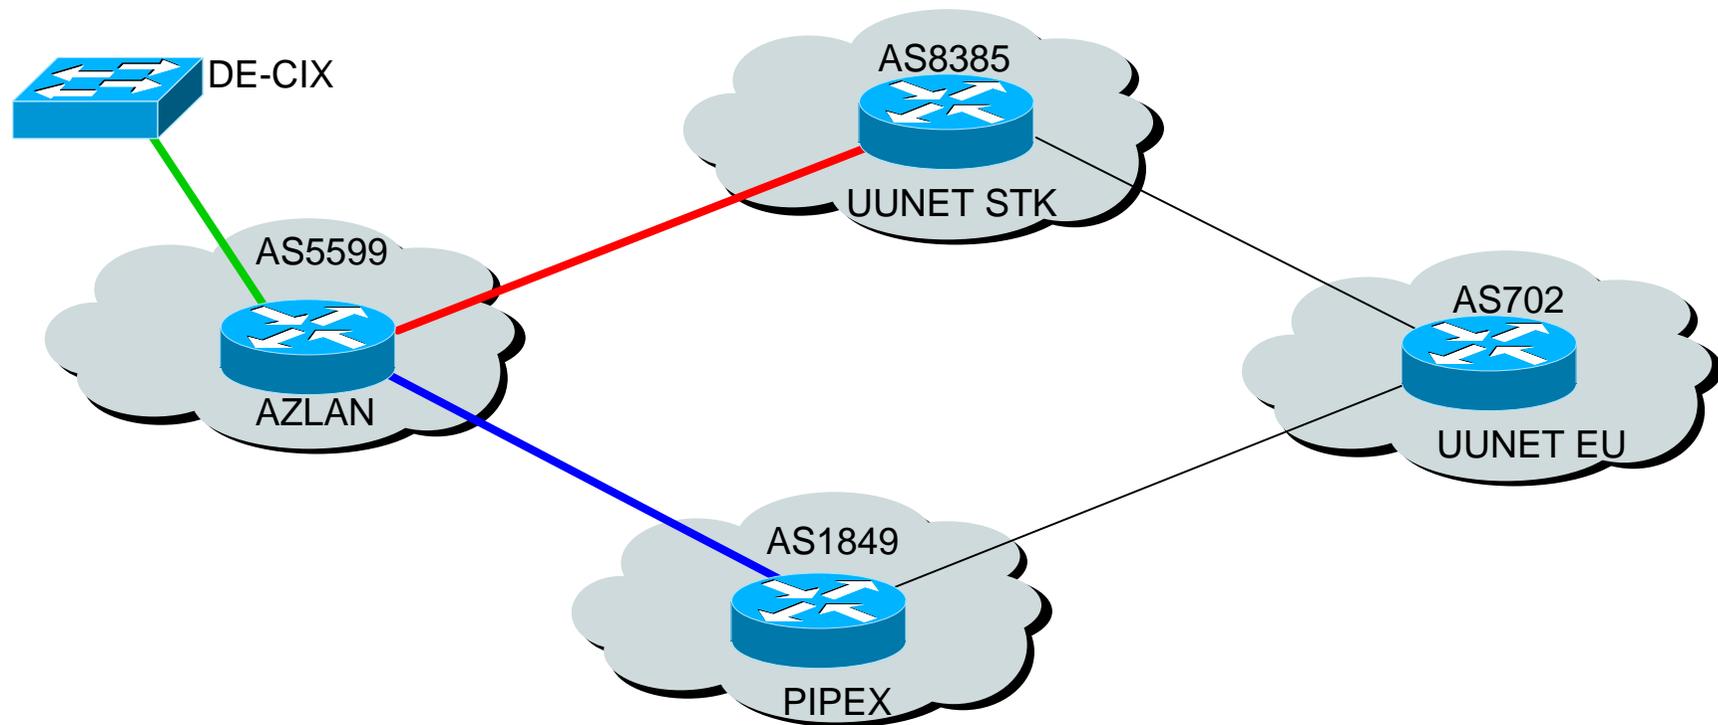

AS-Object

aut-num:	AS5599
descr:	Azlan Scandinavia
descr:	Internet Business Unit
descr:	Glostrup NOC
as-in:	from AS1849 100 accept AS-PIPEXEURO
as-in:	from AS1835 100 accept AS1835
as-in:	from AS2863 100 accept AS2863
as-in:	from AS3292 100 accept AS-DKNET AS3292
as-in:	from AS3308 100 accept AS3308
as-in:	from AS5492 100 accept AS5492
as-in:	from AS5509 100 accept AS5509
as-in:	from AS6785 100 accept AS6785
as-in:	from AS6834 100 accept AS6834
as-in:	from AS8526 100 accept AS8526
as-in:	from AS8385 100 accept {146.188.0.0/16}

as-out:	to AS1849 announce AS5599
as-out:	to AS1835 announce AS5599
as-out:	to AS2863 announce AS5599
as-out:	to AS3292 announce AS5599
as-out:	to AS3308 announce AS5599
as-out:	to AS5492 announce AS5599
as-out:	to AS5509 announce AS5599
as-out:	to AS6785 announce AS5599
as-out:	to AS6834 announce AS5599
as-out:	to AS8526 announce AS5599
as-out:	to AS8385 announce AS5599
default:	AS8385 100
admin-c:	MW89-RIPE
tech-c:	KE30-RIPE
mnt-by:	AS5599-MNT
changed:	klaus@azlan.net 970207
changed:	klaus@azlan.net 971209
source:	RIPE

Connection to exchange point
Connection transit provider
Connection to backup provider

Syntax for AS Object

- **Can represent policy using**
 - Boolean expressions (AND, OR, NOT)**
 - Keyword ANY - means “everything”**
 - Communities and AS Macros**
 - Route lists - {prefixes}**
 - Cost to indicate preference**
 - Attribute DEFAULT - accept 0.0.0.0**

Fields in AS Object

- **Mandatory Fields**

aut-num, descr, admin-c, tech-c, mnt-by, changed, source, as-in, as-out


- **Optional Fields**

as-name, interas-in, interas-out, as-exclude, default, guardian, remarks, notify

IP Routing Policy

- **Relationship between AS's**
- **What to announce to each neighbour**
- **What to accept from each neighbour**
- **Selection between multiple paths**
- **Preferred paths**
- **Use default route?**


Basic Policy Example

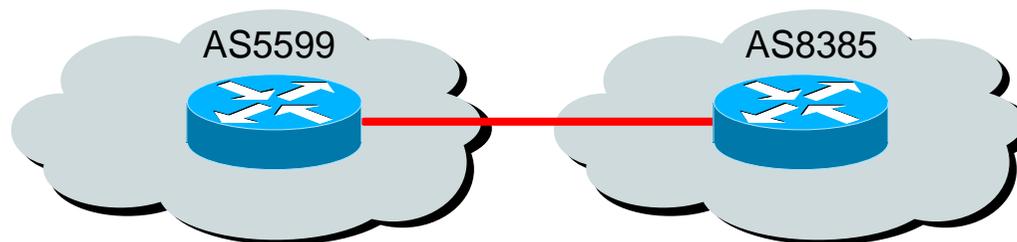

```
aut-num:      AS5599
as-in:        from AS8385 100 accept {146.188.0.0/16}
as-out:       to AS8385 announce AS5599
```

```
aut-num:      AS8385
as-in:        from AS5599 100 accept AS5599
as-out:       to AS5599 announce {146.188.0.0/16}
```

Transit Policy Example

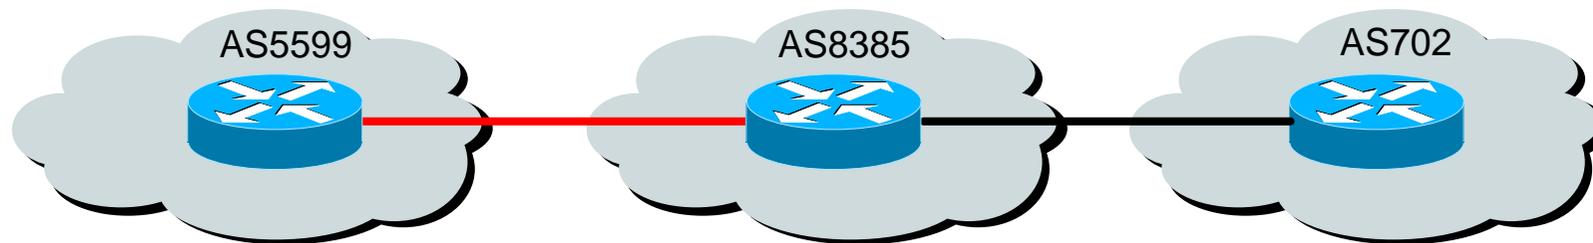

```
aut-num: AS8385
as-in:   from AS702 100 accept ANY
as-in:   from AS5599 100 accept AS5599
as-out:  to AS702 announce AS8385 AS5599 AS8473 AND NOT {0.0.0.0/0}
as-out:  to AS5599 announce {146.188.0.0/16}
default: AS702 50 {146.188.0.0/16}
```

```
aut-num: AS702
as-in:   from AS8385 100 accept AS8385 AS5599 AS8473
as-out:  to AS8385 announce ANY
```

Multihoming Policy Example

aut-num: AS5599

as-in: from AS1849 100 accept AS-PIPEXEURO

as-in: from AS8385 100 accept {146.188.0.0/16}

as-out: to AS8385 announce AS5599

as-out: to AS1849 announce AS5599

aut-num: AS1849


as-in: from AS5599 100 accept AS5599

as-out: to AS5599 announce AS-PIPEXEURO

aut-num: AS8385


as-out: to AS5599 announce {146.188.0.0/16}

as-in: from AS5599 100 accept AS5599

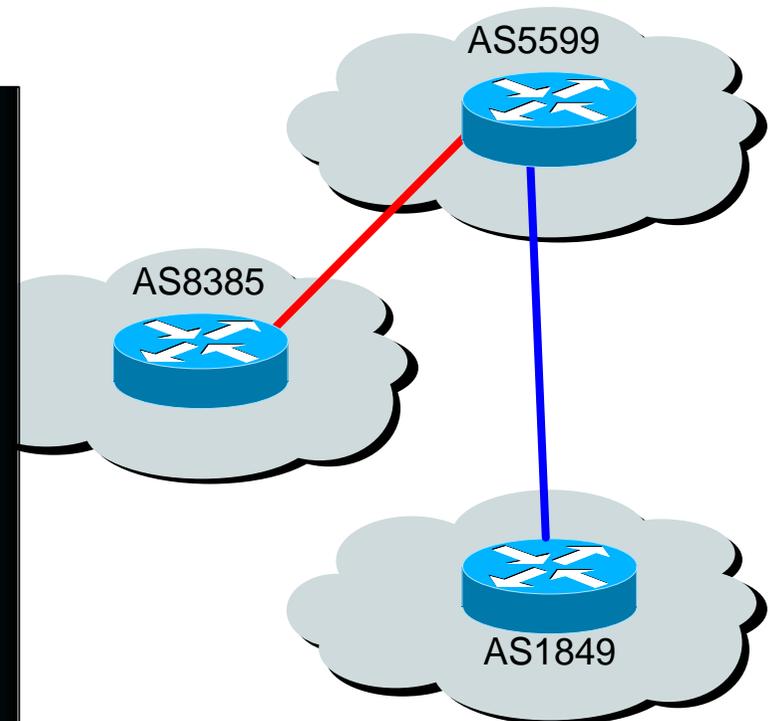

Exchange Point Policy Example

```
aut-num: AS5599
as-out: to AS1835 announce AS5599
as-out: to AS2863 announce AS5599
as-out: to AS3292 announce AS5599
as-out: to AS3308 announce AS5599
as-out: to AS5492 announce AS5599
as-out: to AS5509 announce AS5599
as-out: to AS6785 announce AS5599
as-out: to AS6834 announce AS5599
as-out: to AS8526 announce AS5599
```

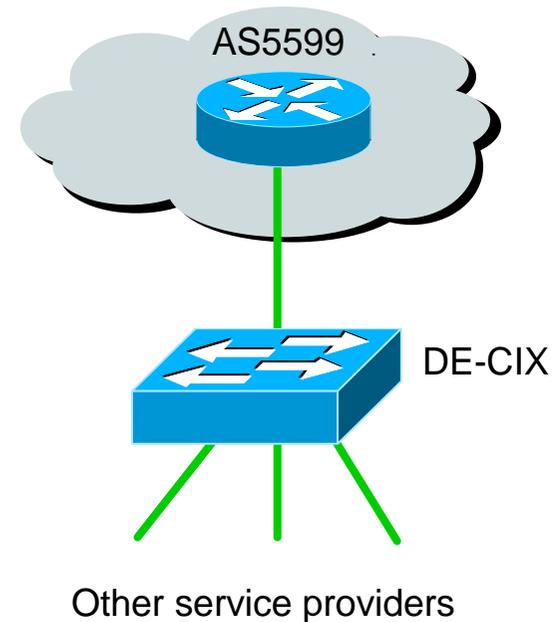

AS Macro

- **Collection of AS's or other AS macros**
- **Describes membership of a set**
- **Contains no policy info**
- **Scales better**
- **Can differentiate between customer and peer routes**

Fields in AS Macro

- **Mandatory Fields**

**as-macro, descr, as-list, tech-c, admin-c,
mnt-by, changed, source**

- **Optional Fields**

guardian, remarks, notify

AS Macro

```
as-macro:          AS-UUNETSTK  
descr:           UUNET customer routes in Stockholm  
as-list:        AS-TAIDE  
as-list:        AS-KOLUMBUS  
as-list:        AS1759  
as-list:        AS8385  
as-list:        AS702  
tech-c:         KCH251  
admin-c:        ES199  
remarks:       AS702 Stockholm routes are community tagged  
notify:        intl-net-eng@uu.net  
mnt-by:         UUNET-MNT  
changed:       annel@uu.net 971113  
source:        RIPE
```

Used in

```
aut-num:        AS702  
as-out:        to AS1759 announce AS-UUNETSTK
```

Route Object

- **Represents a route in the Internet**
- **Contains all membership information**
- **Only one origin possible**
- **Classless (should be aggregated)**
- **Can support **holes** and **withdrawn****

Fields in Route Object

- **Mandatory Fields**

route, descr, origin, mnt-by, changed, source

- **Optional Fields**

hole, withdrawn, comm-list, remarks, notify

- **Example:**

```
route:          195.129.0.0/19
descr:        UUNET-NET
origin:       AS702
remarks:     UUNET filter inbound on prefixes longer than /24
notify:      intl-net-eng@uu.net
mnt-by:       UUNET-MNT
changed:     annel@uu.net 970501
source:      RIPE
```

Route Object

```
route:          194.216.0.0/16
descr:         PIPEX-BLOCK194216
origin:        AS1849
hole:          194.216.59.0/24
remarks:       UUNET UK filter inbound on prefixes longer than /24
mnt-by:        AS1849-MNT
changed:       philip@uk.uu.net 19980107
source:        RIPE
```

```
stk-gw1>show ip bgp 194.216.0.0 255.255.0.0 longer-prefixes
BGP table version is 53607058, local router ID is 195.242.36.254
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 194.216.0.0/16	146.188.30.162		0	702	1849 i
*> 194.216.59.0	146.188.30.162		0	702 701	3491 5557 i

How to register and update information in the IRR

- **Frequently used objects**
- **Update procedures**
 - Modifying Objects**
 - Deleting Objects**
 - Submitting Objects**
 - Authorisation/Notification**
 - Errors and Warnings**
 - NIC handles**

Frequently Used Objects

- **Person - contact person**
- **Maintainer - authorisation of objects**
- **Inetnum - address assignment**
- **Aut-num - autonomous systems**
- **AS-macro - set of AS's**
- **Route - announced routes**

Unique Keys

- **Uniquely identifies an object**
- **Updating object overwrites old entry - need unique key**
- **Used in querying **whois****
- **Web based full text searches available now, e.g.**

<http://whois.apnic.net/apnic-bin/whois.pl>

Unique Keys

- **Person - name plus NIC handle**
- **Maintainer - maintainer name**
- **Inetnum - network number**
- **Aut-num - AS number**
- **AS-macro - AS macro name**
- **Route - route value plus origin**

Modifying an Object

Before

```
person: Philip F. Smith
address: UUNET UK
address: Internet House
address: 332 Science Park
address: Milton Road
address: Cambridge CB4 4BZ
address: England, UK
phone: +44 1223 250100
fax-no: +44 1223 250101
e-mail: philip@uk.uu.net
nic-hdl: PFS2-RIPE
notify: philip@uk.uu.net
changed: philip@uk.uu.net 19971202
source: RIPE
```

Submitted and After

```
person: Philip F. Smith
address: Cisco Systems Australia
address: Level 8, 80 Albert Street
address: Brisbane 4000
address: QLD
address: Australia
phone: +61 7 3238 8200
fax-no: +61 7 3211 3889
e-mail: pfs@cisco.com
e-mail: philip@dial.pipex.com
nic-hdl: PFS2-RIPE
notify: philip@dial.pipex.com
changed: pfs@cisco.com 19980209
source: RIPE
```

- Unique keys must stay the same
- Remember to use current date
- NIC handle mandatory

Deleting an Object

```
person: Philip F. Smith
address: UUNET UK
address: 332 Science Park
address: Milton Road
address: Cambridge
address: England, UK
phone: +44 1223 250100
fax-no: +44 1223 250101
e-mail: philip@uk.uu.net
nic-hdl: PFS2-RIPE
notify: philip@uk.uu.net
changed: philip@uk.uu.net 19971202
source: RIPE
delete: philip@dial.pipex.com left company
```

- **delete** deletes object from database
- current object must be submitted exactly as is, only with extra delete line
- If there is a **mnt-by** line, need the password!

Submitting Objects

- **Email Interface - eg APNIC**

auto-dbm@apnic.net

Robot mail box

Send all database updates to this mailbox

Can use LONGACK and HELP in the subject line

apnic-dbm@apnic.net

human mailbox

questions on the database process

Authorisation/Notification

```
route: 194.216.0.0/16
descr: PIPEX-BLOCK194216
origin: AS1849
hole: 194.216.59.0/24
remarks: UUNET UK filter inbound on prefixes longer than /24
mnt-by: AS1849-MNT
notify: support@uk.uu.net
changed: philip@uk.uu.net 19980107
source: RIPE
```

- **mnt-by** the **maintainer** object
- **notify** who is notified of changes

Maintainer Object

- **Who is authorised**
- **Authorisation Method**
email-from and **crypt-pw**
- **Mandatory Fields**
mntner, descr, admin-c, tech-c, upd-to, auth, mnt-by
- **Optional Fields**
mnt-nfy, changed, notify, source

Maintainer Object

Maintainer Object AS1849-MNT

```
mntner: AS1849-MNT
descr: AS 1849 Maintainer - PIPEX UK
admin-c: PFS2-RIPE
tech-c: PFS2-RIPE
upd-to: philip@uk.uu.net
mnt-nfy: netdev@uk.uu.net
auth: CRYPT-PW fjOlmdmwKsx
mnt-by: AS1849-MNT
changed: philip@uk.uu.net 19980109
source: RIPE
```

Object has to be registered manually

Authorisation/Notification

```
route:      194.216.0.0/16
descr:     PIPEX-BLOCK194216
origin:    AS1849
hole:      194.216.59.0/24
hole:      194.216.136.0/23
remarks:   UUNET UK filter inbound on prefixes longer than /24
mnt-by:    AS1849-MNT
passwd:    c4Ange5
notify:    support@uk.uu.net
changed:   philip@uk.uu.net 19980109
source:    RIPE
```

- New **hole** to be added.
- **passwd** field to allow change
- **<support@uk.uu.net>** will be notified of this change
- updated **changed** field

Warnings and Errors

- **Warnings**

- Object corrected then accepted**

- Notification of action taken sent in acknowledgement**

- **Errors**

- Object not corrected and not accepted**

- Diagnostics in acknowledgement**

- **Syntax checking is very strict**

NIC Handles

```
mntner: AS1849-MNT
descr: AS 1849 Maintainer - PIPEX UK
admin-c: PFS2-RIPE
tech-c: PFS2-RIPE
upd-to: philip@uk.uu.net
mnt-nfy: netdev@uk.uu.net
auth: CRYPT-PW fjOlmdmwKsx
mnt-by: AS1849-MNT
changed: philip@uk.uu.net 19980109
source: RIPE
```

- **PFS2-RIPE** is the NIC Handle of the person
- Only way of avoiding ambiguity in person objects
- Mandatory
- Format: <initials><number>- <regional registry>
- Local differences for obtaining NIC Handles.



RPSL

**The new language of the
Internet Routing Registry**

What is RPSL

- **RPSL is the development of RIPE-181**
RFC2622 – Routing Policy Specification Language
- **Allows more complex policy specification**
Looks very similar to RIPE-181 (but not backward compatible)
- **All participants in the IRR have agreed to migrate to RPSL**
Many already have
- **Training materials at**

<http://www.isi.edu/ra/rps/training>

RPSL Database Software

- **RPSL database software available:**
 - IRRd (Merit) – <http://www.ird.net/>**
In fully deployment
 - RIPE DB v3.0 – <http://www.ripe.net/>**
In beta test
 - RIPE DB 3.0.0b2 with ISI RPSL extensions**
<http://www.kessens.com/~david/software/>
 - BIRD v1.1beta – <ftp://ftp.isi.edu/ra/BIRD>**
Status unknown

Transition

- **RADB and ARIN**

RPSL using MERIT IRRd software

- **RIPE NCC**

In transition now

RPSL using RIPE DB v3.0 software

<http://www.ripe.net/ripenncc/pub-services/db/rpsl/>

- **APNIC**

Planning IRR pilot using RIPE DB v3.0 software

Conversion Tool

- <http://www.isi.edu/ra/rps/transition/>

Welcome to the RPSL Transition Page

This page presents the latest information on the transition from RIPE-181 to the new Routing Policy Specification Language. The information will be updated frequently; visit often to stay up-to-date.

- [Query a mirrored copy of the Internet Routing Registry](#)
- [Query a mirrored copy of the IRR that has been converted to RPSL](#)
- [Convert RIPE-181 objects to RPSL / Perform RPSL syntax checks](#)
- [Access ISI's RPSL-capable database server](#)
- [Download the RIPE-to-RPSL converter tool](#)
- [Transition Plan](#)
- [RPSL Transition Presentation to NANOG, October 1997](#)

Aut-Num Class Example

RPSL

```
aut-num: AS5599
as-name: UNSPECIFIED
descr: Azlan Scandinavia
descr: Internet Business Unit
descr: Glostrup NOC
import: from AS1849
       action pref = 100;
       accept AS-PIPEXEURO

<snip>
export: to AS1849
       announce AS5599

<snip>
default: to AS8385
        action pref = 100;
        networks ANY

admin-c: MW89-RIPE
tech-c: KE30-RIPE
remarks: This data is automatically converted
remarks: from the RIPE181 registry (19980106)
notify: as-guardian@azlan.net
mnt-by: AS5599-MNT
changed: klaus@azlan.net 19970207
source: RIPE
```

RIPE-181

```
aut-num: AS5599

descr: Azlan Scandinavia
descr: Internet Business Unit
descr: Glostrup NOC
as-in: from AS1849 100 accept AS-PIPEXEURO

<snip>
as-out: to AS1849 announce AS5599

<snip>
default: AS8385 100

admin-c: MW89-RIPE
tech-c: KE30-RIPE

notify: as-guardian@azlan.net
mnt-by: AS5599-MNT
changed: klaus@azlan.net 19970207
source: RIPE
```

Route Class Example

RIPE-181

```
route:      194.216.0.0/16
descr:     PIPEX-BLOCK194216
origin:    AS1849
hole:      194.216.59.0/24
remarks:   UUNET UK filter inbound on prefixes longer than /24
mnt-by:    AS1849-MNT
changed:   philip@uk.uu.net 19980107
source:    RIPE
```

RPSL

```
route:      194.216.0.0/16
descr:     PIPEX-BLOCK194216
origin:    AS1849
hole:      194.216.59.0/24
remarks:   UUNET UK filter inbound on prefixes longer than /24
mnt-by:    AS1849-MNT
changed:   philip@uk.uu.net 19980107
source:    RIPE
```

AS-Set Class Example

RIPE-181

```
as-macro: AS-UUNETSTK
descr: UUNET customer routes in Stockholm
as-list: AS-TAIDE
as-list: AS-KOLUMBUS
as-list: AS1759
as-list: AS8385
as-list: AS702
tech-c: KCH
admin-c: ES199
remarks: AS702 Stockholm routes are community tagged
notify: intl-net-eng@uu.net
mnt-by: UUNET-MNT
changed: annel@uu.net 971113
source: RIPE
```

RPSL

```
as-set: AS-UUNETSTK
descr: UUnet customer routes in Stockholm
members: AS-TAIDE, AS-KOLUMBUS, AS702, AS1759, AS8385
remarks: AS702 Stockholm routes are community tagged
remarks: This data is automatically converted from the RIPE181 registry (19980127)
tech-c: KCH
admin-c: ES199
notify: intl-net-eng@uu.net
mnt-by: UUNET-MNT
changed: annel@uk.uu.net 971113
changed: davidk@ISI.EDU 19980127
source: RIPE
```

Real World Example

```
$ whois -h whois.connect.com.au AS4648
```

```
% RIPEdb(3.0.0b1) with ISI/Qwest RPSL extensions
```

```
aut-num:      AS4648
as-name:      NZIX-2
descr:        Telecom New Zealand Limited
import:       from AS2764
              accept ( <^AS2764+ AS2764:AS-CUSTOMERS*$>
                      OR <^AS2764+ AS3409+ AS2764:AS-CUSTOMERS:AS3409+$>
                      OR <^AS2764+ AS4736+ AS2764:AS-CUSTOMERS:AS4736+$>
                      OR <^AS2764+ AS4802+ AS2764:AS-CUSTOMERS:AS4802+$>
                      OR <^AS2764+ AS4805+ AS2764:AS-CUSTOMERS:AS4805+$>
                      OR <^AS2764+ AS7469+ AS2764:AS-CUSTOMERS:AS7469+$>
                      OR <^AS2764+ AS7489+ AS2764:AS-CUSTOMERS:AS7489+$>
                      OR <^AS2764+ AS7543+ AS2764:AS-CUSTOMERS:AS7543+$>
```

```
..next slide
```

Real World Example

```
OR <^AS2764+ AS7586+ AS2764:AS-CUSTOMERS:AS7586+$>
OR <^AS2764+ AS7606+ AS2764:AS-CUSTOMERS:AS7606+$>
OR <^AS2764+ AS7637+ AS2764:AS-CUSTOMERS:AS7637+$>
OR <^AS2764+ AS7648+ AS2764:AS-CUSTOMERS:AS7648+$>
OR <^AS2764+ AS7716+ AS2764:AS-CUSTOMERS:AS7716+$>
OR <^AS2764+ AS9300+ AS2764:AS-CUSTOMERS:AS9300+$>
OR <^AS2764+ AS9328+ AS2764:AS-CUSTOMERS:AS9328+$> )
export:      to AS2764
announce ( <^AS4648+ AS4648:AS-CUSTOMERS*$>
           OR <^AS4648+ AS9325+ AS4648:AS-CUSTOMERS:AS9325+$>
           OR <^AS4648+ AS9941+ AS4648:AS-CUSTOMERS:AS9941+$> )
admin-c:     CC89
tech-c:      MP151
mnt-by:      CONNECT-AU
changed:     mrp@connect.com.au 20000928
source:      CCAIR
```



Tools and Resources

How can I use the IRR?

What tools and resources?

- **RAToolset**

www.isi.edu/ra/RAToolSet

- **RIPE whois**

[ftp.ripe.net/ripe/tools](ftp://ftp.ripe.net/ripe/tools)

- **Traceroute sites**

www.traceroute.org

- **Looking Glasses**

[http://www.traceroute.org/#Looking Glass](http://www.traceroute.org/#LookingGlass)

RAToolSet

- **Two versions**
 - 3.5.8 supports RIPE-181**
 - 4.6.3 supports RPSL**
- **Runs on most Unix platforms**
- **Requires recent g++, tcl and tk**
- **Excellent for housekeeping, debugging and configuration**

RAToolSet Tools

- **RTconfig**
Generate router configurations for Cisco, Bay, GateD and Juniper
- **AOE - aut-num object editor**
update aut-num, as-macro objects
- **ROE - route-object editor**
update route-object
- **CIDRadvisor**
advice on CIDRisation

ROE Uses

- **Route object editor used to:**
 - check for consistency of route objects in IRRs**
 - synchronise route object entries in different IRRs**
 - detect missing or unwanted route objects**

ROE example

File Show Selection Configure

198.22.164.0/24	---	MCI:AS226
198.32.0.0/16	---	MCI:AS226
198.32.0.0/23	---	MCI:AS226 RADB:AS226
198.32.0.0/24	---	MCI:AS226
198.32.1.0/24	---	MCI:AS226
198.32.2.0/24	---	MCI:AS226
198.32.4.0/23	---	MCI:AS226
198.32.4.0/24	---	MCI:AS226
198.32.6.0/24	---	MCI:AS226
198.32.146.0/23	---	MCI:AS226

MCI AS226 RADB AS226

```
route:      198.32.0.0/23
descr:      NETBLK-RA
origin:     AS226
advisory:   AS690 1:3561 2:1740
notify:     Prue@isi.edu
mnt-by:     LN-MAINT-MCI
changed:    Prue@isi.edu 950420
source:     MCI
```

Add Template Delete Template Update Template Schedule Cancel Update IRR

Pending Replies: 0

AOE Uses

- **AS Object editor used to:**
 - generate AS objects and policies **as-in** and **as-out****
 - check policies listed in AS object on the IRRs**
 - check policies according to BGP dump**

AOE example

The screenshot shows the AOE configuration window titled "aoe (AS226 -- from IRR)". The window has a menu bar with "File" and "Configure". On the left, there is a list of ASes: AS111 (IRR), AS222 (IRR), AS333 (IRR), and AS444 (IRR). The main area displays the configuration for AS226:

```
aut-num: AS226
as-name: ASN-LOS-NETTOS
descr: USC/Information Sciences Institute, regional network, Los Nettos
as-in: from AS111 10 accept ANY
as-in: from AS222 10 accept AS222
as-in: from AS333 10 accept AS333
as-in: from AS444 10 accept AS444
as-out: to AS111 announce AS226
as-out: to AS222 announce AS226
as-out: to AS333 announce ANY
```

Below the main configuration, there are two sections for peer configurations:

AS226 -- from IRR

```
as-in: from AS111 10 accept ANY
as-out: to AS111 announce AS226
```


AS111

```
as-in: from AS226 10 accept AS226
as-out: to AS226 announce ANY
```

On the right side, there is a "Policy:" section with "Import" and "Export" buttons, and a "Templates" section with "Append" and "Replace" buttons. At the bottom right, there is a logo for "aoe".

PRtraceroute

- **PRIDE** modified traceroute which includes **AS** information and a comparison between the real route and the route according to the IRR.
- Cisco IOS **trace** command refers to BGP table

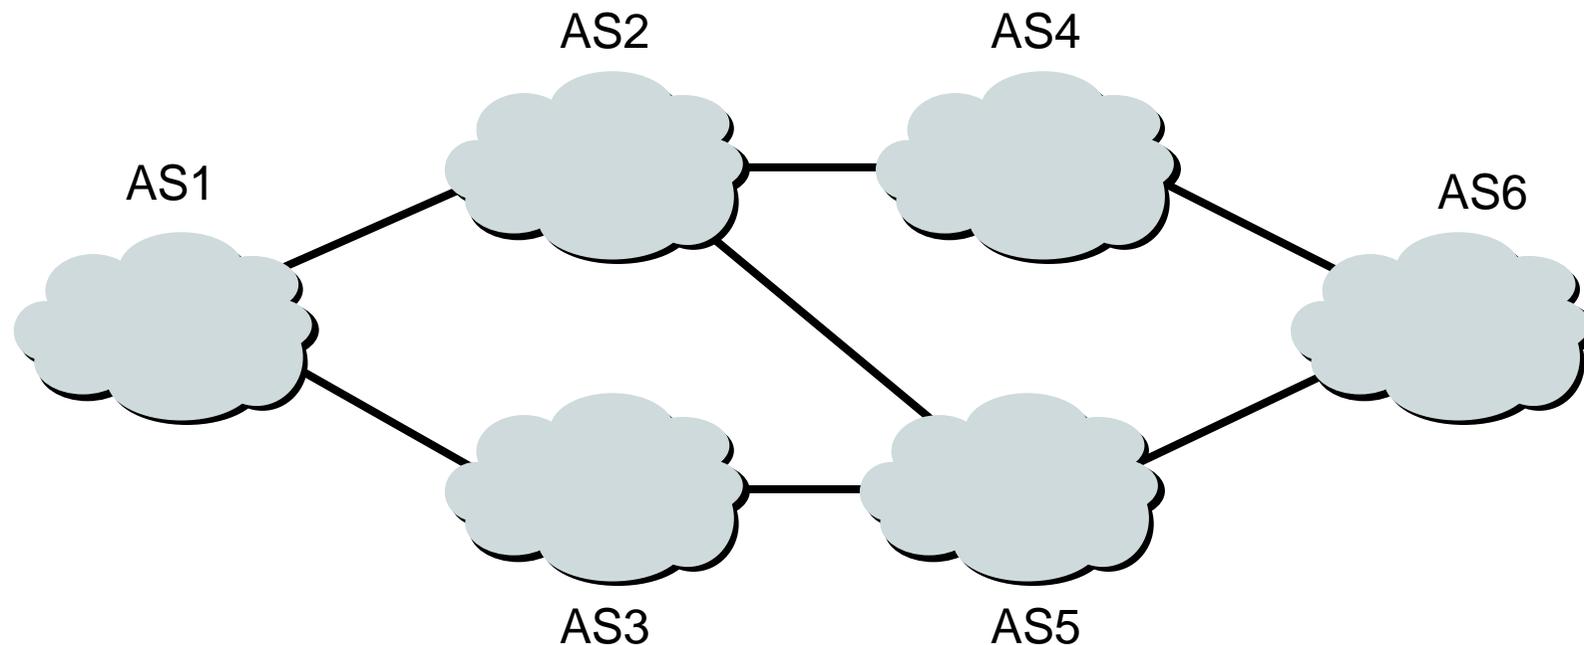

PRtraceroute Example

```
% prtraceroute -lv collegepk-cr9.bbnplanet.net
traceroute with AS and policy additions [Jan 13 20:21:19 UTC]

      from AS109 lovefm.cisco.com (171.68.228.35)
      to   AS86 collegepk-cr9.bbnplanet.net (192.239.103.9)

 1  AS109  al.cisco.com           171.68.228.3      [I] 4 1 1 ms
 2  AS109  acorn.cisco.com        171.68.0.134      [I] 2 1 1 ms
 3  AS109  gaza-gw2.cisco.com     171.68.0.91       [I] 2 1 1 ms
 4  AS109  sj-wall-2.cisco.com    198.92.1.138      [I] 3 3 2 ms
 5  AS109  barrnet-gw.cisco.com   192.31.7.37       [I] 4 3 2 ms
 6  AS200  paloalto-cisco.bbnplanet.net 131.119.26.9      [?] 4 4 3 ms
 7  AS200  paloalto-br1.bbnplanet.net 131.119.0.193     [I] 7 8 7 ms
 8   AS1   chicago2-br1.bbnplanet.net 4.0.1.2           [E1] 58 59 58 ms
 9   AS1   collegepk-br1.bbnplanet.net 4.0.1.6           [I] 82 73 75 ms
10  AS86   collegepk-cr9.bbnplanet.net 128.167.252.9     [E1] 86 81 ms
```

AS Path followed: AS109 AS200 AS1 AS86

AS109 = Cisco Systems

AS200 = BBN Planet Western Region

AS1 = BBN Planet backbone

AS86 = SURAnet Northern AS

ERROR hop should not have been taken
NH ASx possible NEXT_HOP followed
I intra AS hop
En nth choice inter AS hop
Dn nth choice default hop
C connected hop
? No information in IRR

RIPE **whois** client

- **Runs on most (UNIX) platforms**
- **Easy to install**
- **Can use to query all other IRR's**
- **Expanded whois functionality**
- **Good for housekeeping, debugging, operations**
- **Was used for all the examples in this tutorial**
- **RECOMMENDED!**

Web based whois

The screenshot shows a Netscape browser window titled "Whois Advanced Query - Netscape". The address bar contains the URL "http://www.apnic.net/apnic-bin/whois2.pl". The browser's toolbar includes buttons for Back, Forward, Reload, Home, Search, Netscape, Print, Security, Shop, and Stop. Below the browser window, the APNIC website is displayed. The page header features the APNIC logo and the text "Asia Pacific Network Information Centre". A navigation menu includes links for Services, Membership, Information, Documents, Training, Contact, and Search. The main content area is titled "Search the APNIC Whois database". It contains a search form with a "Search for:" input field, a "Search Whois" button, and a "Show all results" dropdown menu. Below the search form, there are two columns of options. The left column, titled "Advanced Whois search options", includes: "-T" (Type of object) set to "all types", "-s" (Source database) set to "all sources", and "-i" (Inverse lookup) set to "none". The right column, titled "Brief descriptions below", includes: "-F" (Fast raw output) as an unchecked checkbox, "-r" (No recursive lookup) as an unchecked checkbox, "-S" (No 'syntactic sugar') as an unchecked checkbox, "-R" (APNIC objects only) as an unchecked checkbox, and a "Level of specificity:" section with three radio button options: "-L" (Less specific), "-m" (1st level more specific), and "-M" (All more specific). At the bottom of the search options, there is a "[About the database]" link and a "Reset" button. Below the search options, the text "Common whois options" is visible. The browser's status bar at the bottom shows "Document: Done".

EBone Looking Glass

Ebone Looking Glass - Netscape

File Edit View Go Communicator Help

Back Forward Reload Home Search Netscape Print Security Shop Stop

Location: <http://www.ebone.net/looking-glass/> What's Related

Instant Message Philip Networking Cisco Cisco Default Miscellaneous RealPlayer Welcome to Liqu Liquid Music Ne

Ebone Looking Glass



See also tracertool.org and [Tracerouters Around the World](#)

Query:

- bgp
- bgp summary
- dampened-paths
- environmental
- flap-statistics
- mroute
- mroute summary
- ping
- trace
- version

Address:

|

The looking-glass is originally provided by Ed Kern. Improvements by Marian Durkovic and Steen Lindén.

Last modified: 23. January 2001

APRICOT 2 Document: Done



Open Issues

Why am I not using the IRR?

Open Issues

- **Why isn't the IRR used more today?**
 - Ignorance?**
 - Education?**
 - Security fears?**
 - No local routing registry?**
- **What tools are missing?**

Tool Availability

- **Should software be available as a commercial package?**
 - Better bundled/supported/debugged?**
 - Better integration/training?**
- **Most tools are freely available public efforts for the good of the “community”**

Routing Registries

- **Belief that the Internet works without the IRR.**

It does, still...

Many ISPs rely on the data kept in the registry

Many ISPs use the IRR to help operate their businesses


Subset of tools available are being used on a daily basis

Awareness & Training

- **Is there enough awareness about Internet routability?**
- **Is there enough training on the promotion of routability**
- **Headcount requirement**
 - depends on organisation**
 - too easy and cheaper to be irresponsible**
- **Overall organisational awareness of the issues [®] overall efficiency, quality of service and support**

Ways forward

- **Routing Registry enhancements**
 - RPSL matches most of BGP's policy capabilities today**
- **Feedback on tool enhancements**
- **Feedback to vendors on equipment configuration enhancements**
- **More training, more education, more feedback!**

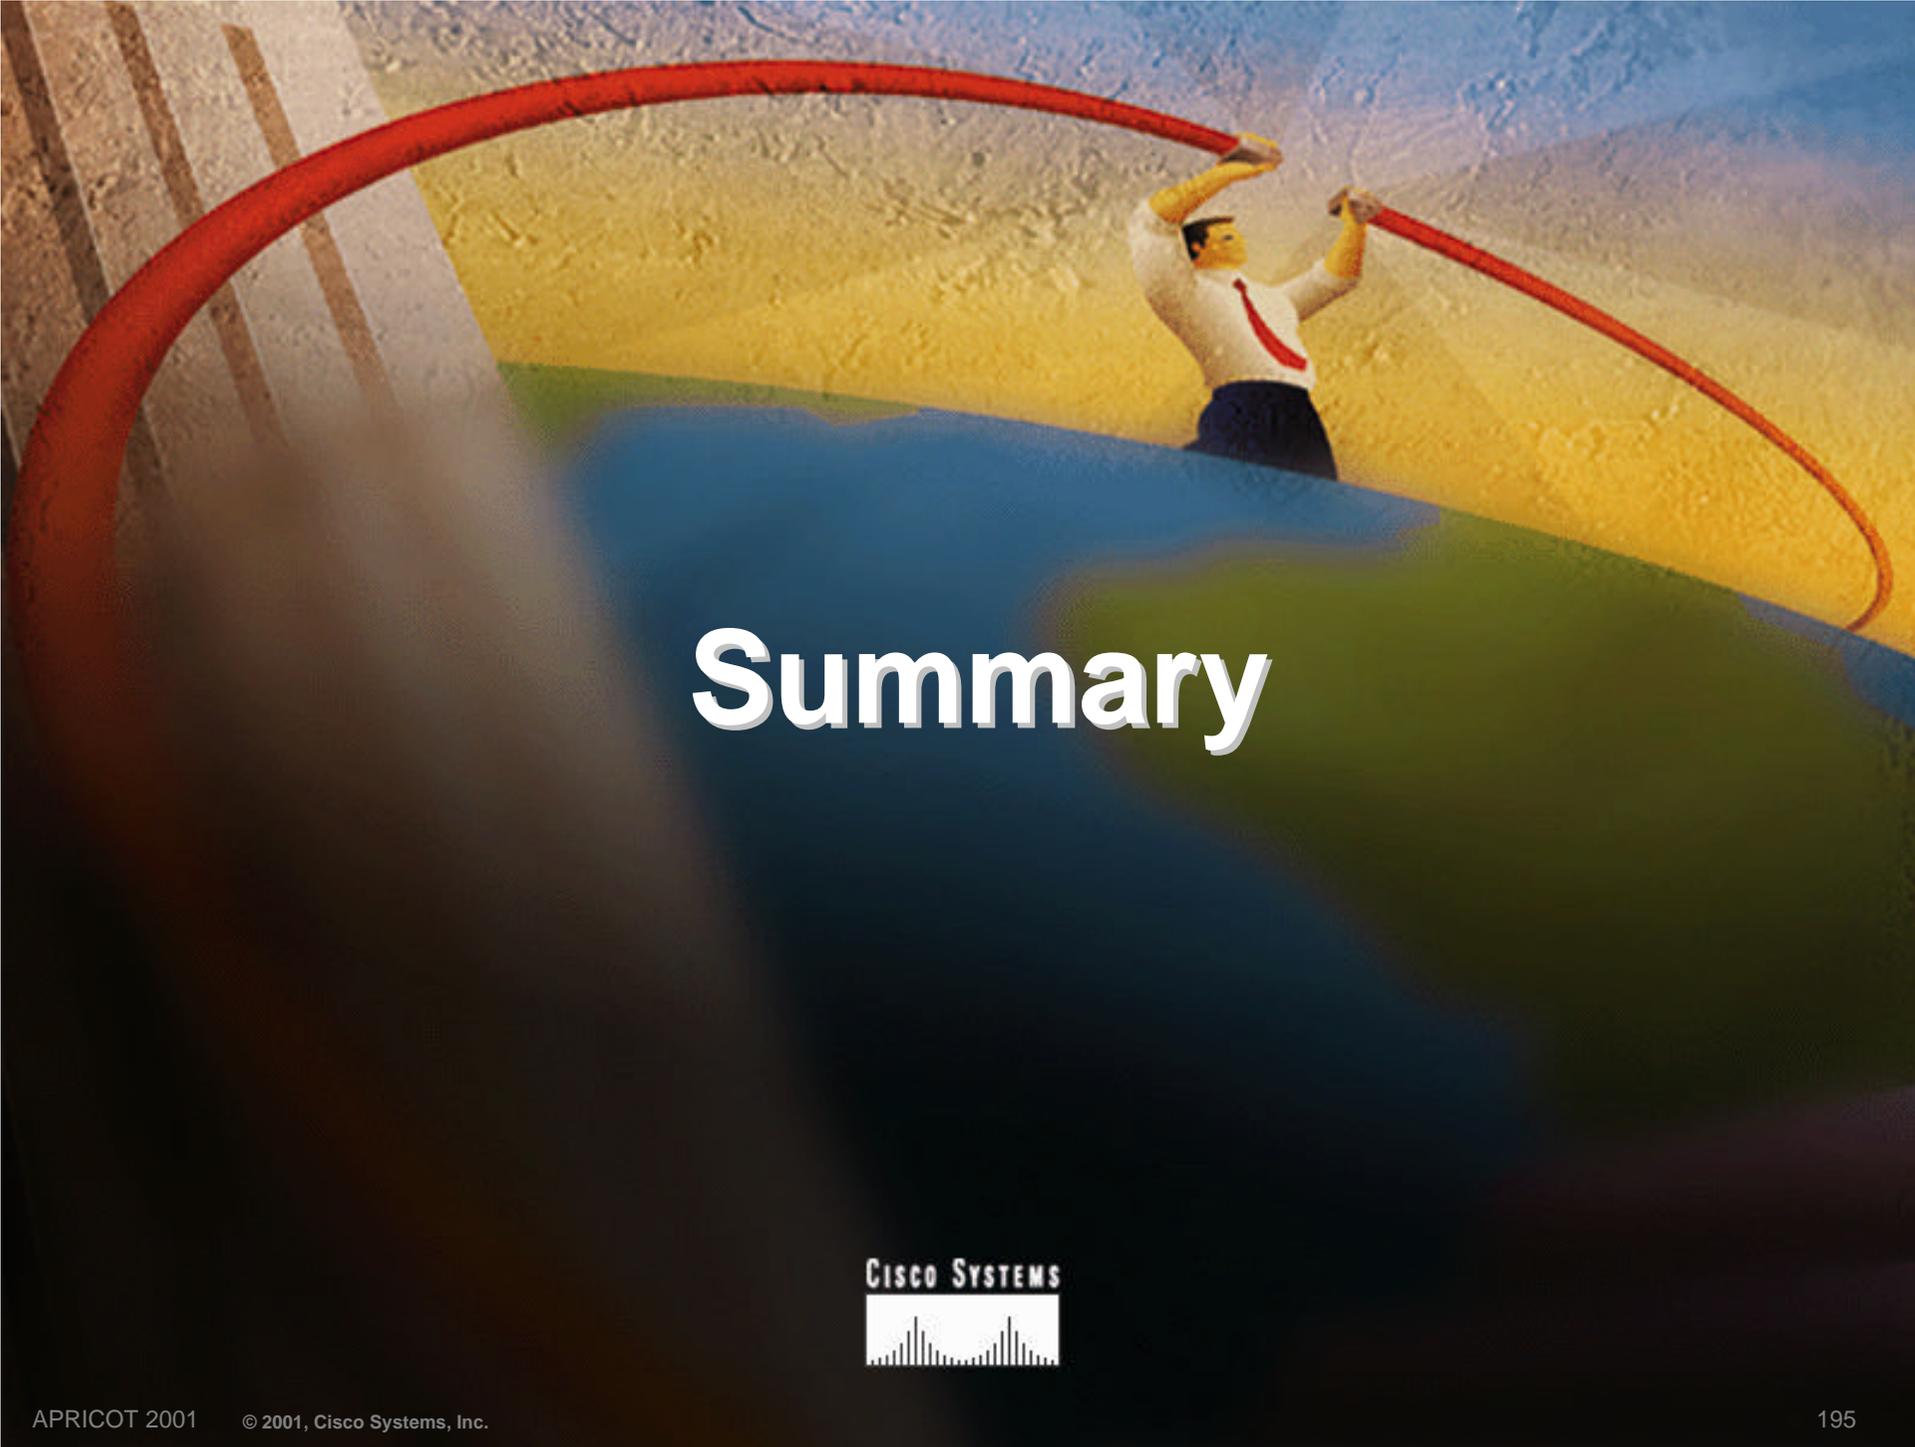A man in a white shirt and red tie is holding a large red pipe over a colorful landscape. The landscape is divided into sections of blue, green, and yellow. The man is standing on the yellow section, holding the pipe over the blue section. The pipe is curved and arches over the landscape. The word "Summary" is written in large white letters in the center of the image.

Summary



Summary

- **ISP networks and terminology**
- **The application of IGPs and BGP in an Internet network**
- **Shown tools which help diagnose and solve routing problems more easily**
- **Application of routing registries**

Summary

- **Made you more aware of the issues facing the Internet today**
- **Showed you how to make a positive contribution to the functioning of the Internet**
- **Promoted Routability!**

The End!

- **Any Questions?**
- **Please fill in evaluation form**
- **This presentation will be available at**
<http://www.cisco.com/public/cons/isp/documents>
- **My contact info:**
Philip Smith <pfs@cisco.com>

Useful URL's & Reading

1. CIDR

<ftp://ftp.isi.edu/in-notes/rfc{1517,1518,1519}.txt>

<http://www.ibm.net.il/~hank/cidr.html>

<ftp://ftp.uninett.no/pub/misc/eidnes-cidr.ps.Z>

Network addressing when using CIDR

2. AS numbers

<ftp://ftp.isi.edu/in-notes/rfc1930.txt>

Guidelines for creation, selection, and registration of an AS

3. Address Allocation and Private Internets

<ftp://ftp.isi.edu/in-notes/rfc1918.txt>

4. BGP Dampening

<http://www.cisco.com/warp/public/459/16.html>

<ftp://ftp.ripe.net/ripe/docs/ripe-210.txt>

European recommendations for route flap dampening

<ftp://engr.ans.net/pub/slides/nanog/feb-1995/route-dampen.ps>

5. Routing Discussion

<http://www.ripe.net/wg/routing/index.html>

Useful URL's & Reading

6. Traceroute server repository

<http://www.boardwatch.com/isp/trace.htm>

<http://nitrous.digex.net>

Internet Looking Glass

7. ISP Tips

<http://www.amazing.com/internet/faq.html>

<http://www.cisco.com/public/cons/isp/>

8. BGP Table

<http://www.telstra.net/ops/bgptable.html>

<http://www.employees.org/~tbates/cidr.hist.plot.html>

<http://www.merit.edu/ipma/reports>

<http://www.apnic.net/stats/bgp>

9. Route server views

<http://www.caida.org>

10. NANOG archive

<http://www.merit.edu/mail.archives/html/nanog/maillist.htm>

IRR Reading List

1. RFC1786 “Representation of IP Routing Policies in a Routing Registry”
<ftp://ftp.isi.edu/in-notes/rfc1786.txt>
2. RATools and RSPL
<ftp://ftp.apnic.net/ietf/rfc/rfc2280.txt>
Tools <http://www.isi.edu/ra/>*
Mailing List <ratoolset@isi.edu>
3. PRIDE
Slides <ftp://ftp.ripe.net/pride/docs/course-slides>
Guide <ftp://ftp.ripe.net/pride/docs/guide-2.0txt.{ps}.tar.gz>
Tools <ftp://ftp.ripe.net/pride/tools/>*
4. IRR authorisation/notification
<ftp://ftp.ripe.net/ripe/docs/ripe-120.txt>
5. RADB pointers
<http://www.ra.net>
<http://www.ra.net/faq.htm>
6. ISP run RR User documents
<http://infopage.cw.net/Routing>