

# Securing Internet Routing

## RPKI & Route Origin Validation

# Recent - Fat-finger/Hijacks/Leaks



- BGP Optimizers impact Internet – **June 2019**

- ❑ Most CF (AS13335) hosted sites were not reachable during the leak
  - About 15% of their global traffic!!
  - ~ 120mins

On Mon, Jun 24, 2019 at 3:57 AM [REDACTED] wrote:  
Hello are there any issues with CloudFlare services now?

**Andree Toonk**  
@atoonk

Quick dumps through the data, showing about 2400 ASNs (networks) affected. Cloudflare being hit the hardest. Top 20 of affected ASNs below

```
sourceAS=13335
sourceAS=4323
sourceAS=7018
sourceAS=63949
sourceAS=2828
sourceAS=26769
sourceAS=209
sourceAS=6428
sourceAS=16509
sourceAS=45899
sourceAS=852
sourceAS=12576
sourceAS=20473
sourceAS=54113
sourceAS=55081
sourceAS=2914
```


6:08 AM - 24 Jun 2019 from Vancouver, British Columbia

<https://twitter.com/atoonk/status/1143143943531454464/photo/1>

# Recent - Fat-finger/Hijacks/Leaks



- BGP Optimizers impact Internet (contd...)
  - How and What happened?

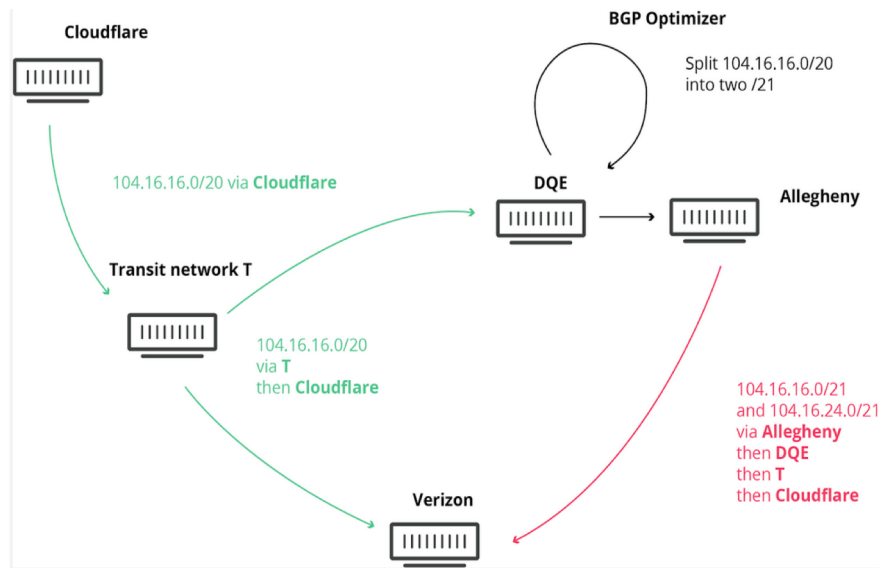

<https://blog.cloudflare.com/how-verizon-and-a-bgp-optimizer-knocked-large-parts-of-the-internet-offline-today/amp/>

## BGP Optimizers (Was: Validating possible BGP MITM attack)

From: Job Snijders <job () ntt net>

Date: Thu, 31 Aug 2017 22:06:49 +0200

Dear all,

disclaimer:

[ The following is targetted at the context where a BGP optimizer generates BGP announcement that are ordinarily not seen in the Default-Free Zone. The OP indicated they announce a /23, and were unpleasantly surprised to see two unauthorized announcements for /24 more-specifics pop up in their alerting system. No permission was granted to create and announce these more-specifics. The AS\_PATH for those /24 announcements was entirely fabricated. Original thread <https://mailman.nanog.org/pipermail/nanog/2017-August/092124.html> ]

On Thu, Aug 31, 2017 at 11:13:18AM -0700, Andy Litzinger wrote:

Presuming it was a route optimizer and the issue was ongoing, what would be the suggested course of action?

I strongly recommend to turn off those BGP optimizers, glue the ports shut, burn the hardware, and salt the grounds on which the BGP optimizer sales people walked.

# Recent - Fat-finger/Hijacks/Leaks



- Google prefix leaks – **Nov 2018**
  - Google services (G-Suite, Google search and Google analytics) affected by the leak
    - Traffic dropped at AS4809 (China Telecom)
    - ~ 74mins



Following

looking into BGP leak incident involving @google prefixes, AS37282 out of Nigeria and China Telecom.

3:40 AM - 13 Nov 2018

54 Retweets 48 Likes



ThousandEyes  
@thousandeyes

Following

BREAKING: Potential hijack underway. ThousandEyes detected intermittent availability issues to Google services from some locations. Traffic to certain Google destinations appears to be routed through an ISP in Russia & black-holed at a China Telecom gateway router.



2:57 AM - 13 Nov 2018

609 Retweets 525 Likes






# Recent - Fat-finger/Hijacks/Leaks



- Google prefix leaks (contd...)
  - How did it happen?
    - AS37282 (MainOne) leaked Google prefixes to AS4809 (CT) at IXPN, who leaked it to other transit providers like AS20485 (TransTelecom)

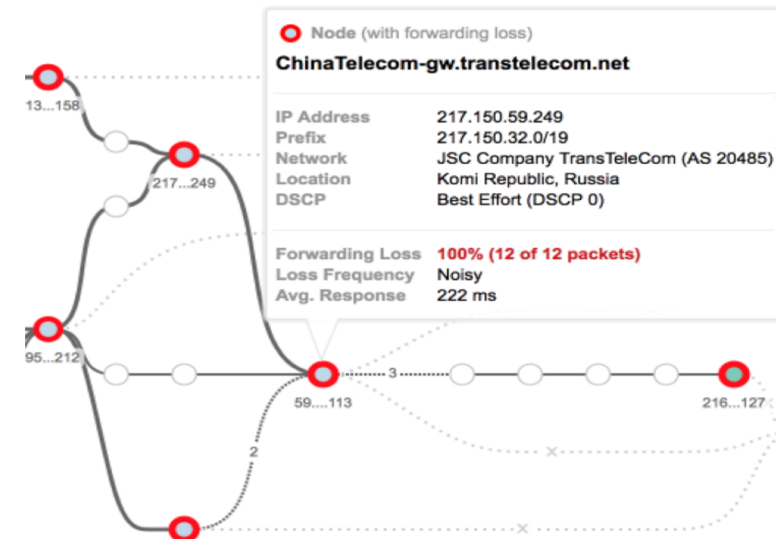

<https://blog.thousandeyes.com/internet-vulnerability-takes-down-google/>

# Recent - Fat-finger/Hijacks/Leaks




- Amazon (AS16509) Route53 hijack – **April 2018**
  - AS10279 (eNET) originated more specifics (/24s) of Amazon Route53's prefix (205.251.192.0/21)  
205.251.192.0/24 ..... 205.251.199.0/24  
<https://ip-ranges.amazonaws.com/ip-ranges.json>
  - Its peers, like AS6939 (HE), shared these routes with 100s of their own peers...
  - The motive?
    - During the period, DNS servers in the hijacked range only responded to queries for [myetherwallet.com](https://myetherwallet.com)
    - Responded with addresses associated with AS41995/AS48693

# Recent - Fat-finger/Hijacks/Leaks



- Route53 hijack (contd...)
  - ❑ Resolvers querying any Route53 managed names, would ask the authoritative servers controlled through the BGP hijack
    - Possibly, used an automated cert issuer to get a cert for [myetherwallet.com](https://myetherwallet.com)
  - ❑ use *THEIR* crypto to end-users to see everything (including passwords)

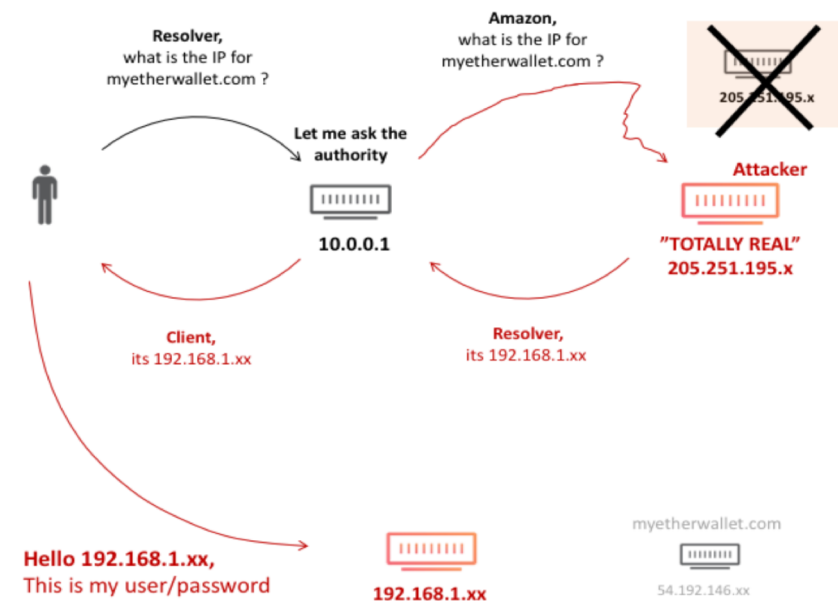

<https://blog.cloudflare.com/bgp-leaks-and-crypto-currencies>

# Recent - Fat-finger/Hijacks/Leaks



- ~~Bharti (AS9498) originates 103.0.0.0/10 - **Dec 2017**~~
  - ~~▫ ~ 2 days~~
  - ~~▫ No damage done – more than 8K specific routes!~~
- Google brings down Internet in Japan - **Aug 2017**
  - ~ 24 hours)
  - Google (AS15169) leaked **>130K** prefixes to Verizon (AS701) – in Chicago
    - Normally ~ 50 prefixes
    - ~25K of those were NTT OCN's (AS4713) more specifics
    - which was leaked onwards to KDDI and IIJ (and accepted)
  - Everyone who received the leaked more specifics, preferred the Verizon-Google path to reach NTT OCN!

# Recent - Fat-finger/Hijacks/Leaks



- Google leak (contd...)

```

trace from Tokyo, Japan to Inuyama, Japan at 04:44 Aug 24, 2017
1 *
2 202.177.203.50 xe-0-0-0.gw401.ty2.ap.equinix.com Tokyo Japan 0.717
3 183.177.32.143 xe-1-1-1.gw402.ty1.ap.equinix.com Tokyo Japan 0.755
4 143.90.232.25 25.143090232.odn.ne.jp Tokyo Japan 1.411
5 143.90.161.73 Tokyo Japan 2.757
6 143.90.47.14 STOrs-01Te0-1-0-1.nw.odn.ad.jp Tokyo Japan 3.552
7 210.252.167.230 230.210252167.odn.ne.jp Tokyo Japan 4.094
8 *
9 60.37.54.105 OCN (AS4713) CIDR BLOCK 70 Tokyo Japan 4.088
10 125.170.97.85 OCN (AS4713) CIDR BLOCK 77 Tokyo Japan 4.017
11 125.170.97.74 OCN (AS4713) CIDR BLOCK 77 Osaka-shi Japan 12.263
12 153.149.219.22 OCN (AS4713) CIDR BLOCK 93 Osaka-shi Japan 12.362
13 153.146.148.18 OCN (AS4713) CIDR BLOCK 93 Tokyo Japan 14.45
14 60.37.32.250 OCN (AS4713) CIDR BLOCK 70 Tokyo Japan 13.116
15 118.23.141.202 OCN (AS4713) CIDR BLOCK 86 Tokyo Japan 13.332
16 118.23.142.99 OCN (AS4713) CIDR BLOCK 86 Tokyo Japan 22.307
17 211.11.83.160 OCN (AS4713) CIDR BLOCK 23 Inuyama Japan 15.672
    
```

Before leak (JP->JP)

After leak  
(JP->JP)

```

trace from Tokyo, Japan to Inuyama, Japan at 03:28 Aug 25, 2017
1 *
2 183.177.32.145 Equinix Asia Pacific Tokyo Japan 0.249
3 210.130.154.37 IIJ IPv4 BLOCK ( AS2497 ) Tokyo Japan 0.618
4 58.138.102.109 tky001bb11.IIJ.Net Tokyo Japan 0.877
5 58.138.88.86 sjc002bb12.IIJ.Net San Jose United States 97.797
6 152.179.48.117 TenGigE0-3-0-8.GW6.SJC7.ALTER.NET San Jose United States 97.869
7 *
8 152.179.105.110 google-gw.customer.alter.net Chicago United States 337.19
9 108.170.243.197 Google Inc. Chicago United States 246.325
10 *
11 209.85.241.43 Google Inc. United States 256.188
12 72.14.238.38 Google Inc. Canada 247.849
13 209.85.245.110 Google Inc. Vancouver Canada 249.291
14 *
15 108.170.242.138 Google Inc. Tokyo Japan 246.267
16 211.0.193.21 OCN (AS4713) CIDR BLOCK 21 Tokyo Japan 246.351
17 122.1.245.65 OCN (AS4713) CIDR BLOCK 81 Tokyo Japan 246.426
18 *
19 153.149.218.10 OCN (AS4713) CIDR BLOCK 93 Osaka-shi Japan 256.027
20 125.170.96.38 OCN (AS4713) CIDR BLOCK 77 Tokyo Japan 255.683
21 *
22 60.37.32.250 OCN (AS4713) CIDR BLOCK 70 Tokyo Japan 254.989
23 118.23.141.202 OCN (AS4713) CIDR BLOCK 86 Tokyo Japan 254.526
24 *
25 211.11.83.160 OCN (AS4713) CIDR BLOCK 23 Inuyama Japan 256.212
    
```

```

trace from London, England to Nürnberg, Germany at 03:30 Aug 25, 2017
1 *
2 195.66.248.190 fe0-2.tr2.linx.net London United Kingdom 0.327
3 195.66.249.10 ge0-2-502.tr5.linx.net London United Kingdom 0.441
4 195.66.249.13 ge0-2-501.tr4.linx.net London United Kingdom 0.477
5 195.66.248.10 uunet-uk-transit.thn.linx.net London United Kingdom 0.507
6 158.43.193.245 POS0-0.CR2.LND6.ALTER.NET London United Kingdom 0.497
7 140.222.239.41 xe-0-0-0-IL1.NYC50.ALTER.NET New York United States 108.146
8 146.188.4.197 xe-0-0-1-IL1.NYC41.ALTER.NET New York United States 75.719
9 140.222.234.221 0.et-10-1-0.GW7.CHI13.ALTER.NET Chicago United States 94.793
10 152.179.105.110 google-gw.customer.alter.net Chicago United States 224.352
11 *
12 216.239.40.189 Google Inc. Northlake United States 202.193
13 216.239.58.255 Google Inc. Northlake United States 203.995
14 216.239.58.12 Google Inc. Northlake United States 207.026
15 209.85.253.184 Google Inc. Luxembourg Luxembourg 212.944
16 209.85.252.215 Google Inc. Luxembourg Luxembourg 213.112
17 108.170.252.71 Google Inc. Luxembourg Luxembourg 213.265
18 72.14.222.53 Google Inc. Luxembourg Luxembourg 212.061
19 188.111.165.169 Vodafone GmbH Germany 227.077
20 178.7.128.112 Vodafone D2 GmbH Germany 224.776
    
```

After leak  
(EU->EU)

<https://dyn.com/blog/large-bgp-leak-by-google-disrupts-internet-in-japan/>

# Fat-finger/Hijacks/Leaks



- YouTube (AS36561) Incident - **Feb 2008**
  - ~ 2 hours
  - AS17557 (PT) announced 208.65.153.0/24 (208.65.152.0/22)
    - Propagated by AS3491 (PCCW)

# Why do we keep seeing these?



- Because NO ONE is in charge?
  - No single authority model for the Internet
  - No reference point for what's right in routing

# Why do we keep seeing these?



- Routing works by RUMOUR
  - Tell what you know to your neighbors, and Learn what your neighbors know
  - Assume everyone is correct (and *honest*)
    - Is the originating network the rightful owner?



# Why do we keep seeing these?



- Routing is VARIABLE
  - The view of the network depends on where you are
    - Different routing outcomes at different locations
  - ~ no reference view to compare the local view ☹

# Why do we keep seeing these?



- Routing works in REVERSE
  - Outbound advertisement affects inbound traffic
  - Inbound (*Accepted*) advertisement influence outbound traffic

# Why do we keep seeing these?



- As always, there is no **E**-bit (**evil!**)
  - ❑ A bad routing update does not identify itself as BAD
  - ❑ All we can do is identify GOOD updates
  - ❑ But how do we identify what is GOOD???

# Why should we worry?



- Because it's just so easy to do bad in routing!



By Source (WP:NFC#4), Fair use,  
<https://en.wikipedia.org/w/index.php?curid=42515224>


# How do we address these?




- **Filtering!**

- Filters with your peers, upstream(s) and customers
  - Prefix filters
  - Prefix limit
  - AS-PATH filters
  - AS-PATH limit
  - RFC 8212 – BGP default reject or something similar

# Current practice

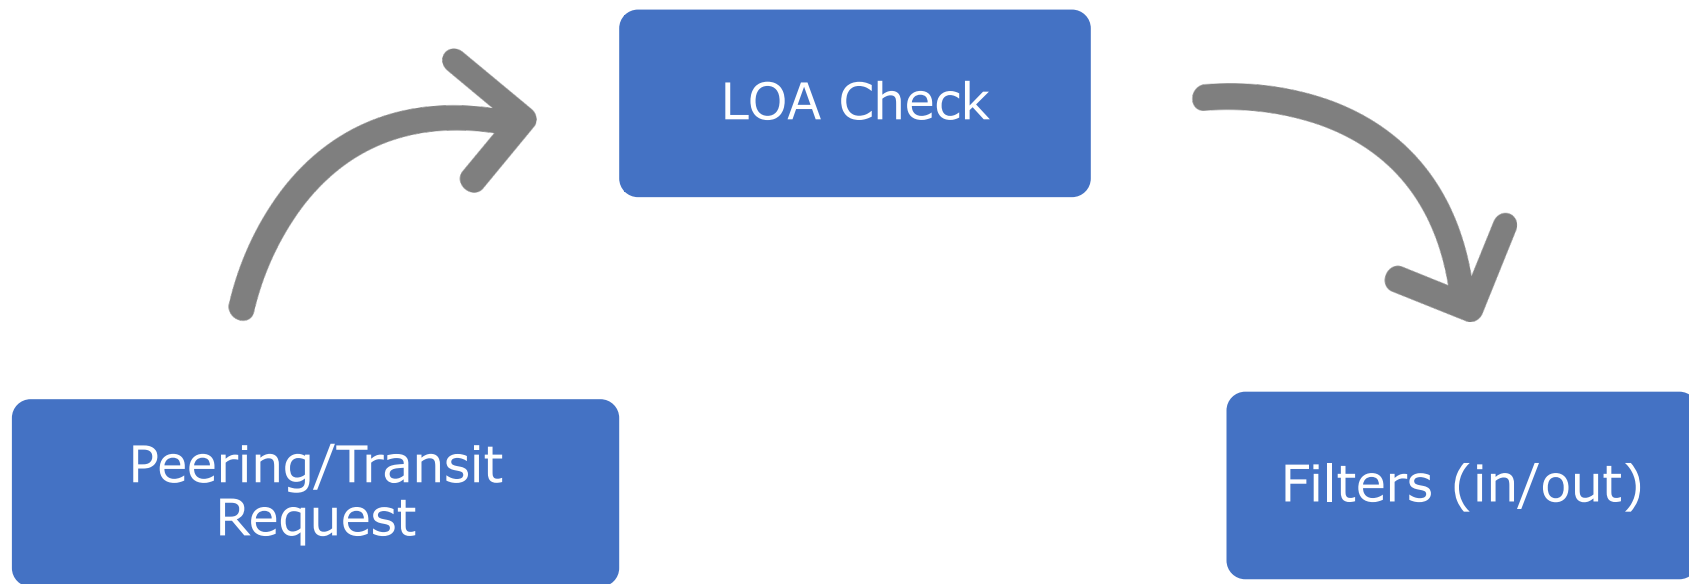

# Tools & Techniques

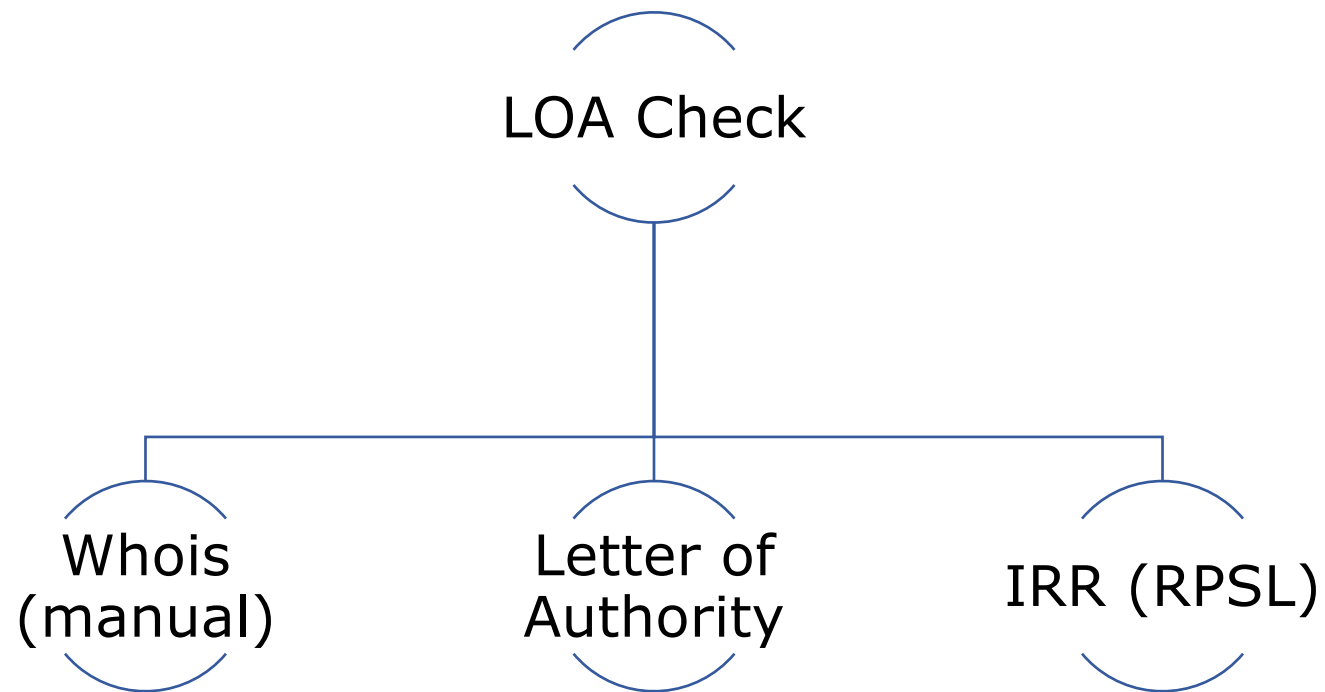

# Tools & Techniques



- Look up **whois**
  - ▢ verify holder of a resource

```
tashi@tashi ~-> whois -h whois.apnic.net 202.125.96.0
% [whois.apnic.net]
% Whois data copyright terms    http://www.apnic.net/db/dbcopyright.html

% Information related to '202.125.96.0 - 202.125.96.255'

% Abuse contact for '202.125.96.0 - 202.125.96.255' is 'training@apnic.net'

inetnum:        202.125.96.0 - 202.125.96.255
netname:        APNICTRAINING-AP
descr:         Prefix for APNICTRAINING LAB DC
country:        AU
admin-c:        AT480-AP
tech-c:         AT480-AP
status:         ALLOCATED NON-PORTABLE
mnt-by:         MAINT-AU-APNICTRAINING
mnt-irt:        IRT-APNICTRAINING-AU
last-modified:  2016-06-17T00:17:28Z
source:         APNIC

irt:            IRT-APNICTRAINING-AU
address:        6 Cordelia Street
address:        South Brisbane
address:        QLD 4101
e-mail:         training@apnic.net
abuse-mailbox:  training@apnic.net
admin-c:        AT480-AP
tech-c:         AT480-AP
auth:          # Filtered
mnt-by:         MAINT-AU-APNICTRAINING
last-modified:  2013-10-31T11:01:10Z
source:         APNIC
```

```
role:           APNIC Training
address:        6 Cordelia Street
address:        South Brisbane
address:        QLD 4101
country:        AU
phone:          +61 7 3858 3100
fax-no:         +61 7 3858 3199
e-mail:         training@apnic.net
admin-c:        JW3997-AP
tech-c:         JW3997-AP
nic-hdl:        AT480-AP
mnt-by:         MAINT-AU-APNICTRAINING
last-modified:  2017-08-22T04:59:14Z
source:         APNIC
```

```
% Information related to '202.125.96.0/24AS131107'


route:          202.125.96.0/24
descr:         Prefix for APNICTRAINING LAB DC
origin:        AS131107
mnt-by:        MAINT-AU-APNICTRAINING
country:        AU
last-modified:  2016-06-16T23:23:00Z
source:        APNIC
```



# Tools & Techniques



- Ask for a **Letter of Authority**
  - Absolve from any liabilities



Asia Pacific Network Information Centre  
APNIC Pty Ltd  
ABN: 42 081 528 010  
6 Cordelia Street  
PO Box 3646  
South Brisbane  
QLD 4101 AUSTRALIA  
URL [www.apnic.net](http://www.apnic.net)  
Enquiries [helpdesk@apnic.net](mailto:helpdesk@apnic.net)  
Accounts [billing@apnic.net](mailto:billing@apnic.net)  
Phone +61 7 3858 3100  
Fax +61 7 3858 3199

31/03/2018  
Letter of Authorization

To whom it may concern,

APNIC Training (AS45192) runs a lab network to reproduce technical problems faced by members to help troubleshoot specific issues.

This letter serves as an authorization for APNIC Infra (AS4608) to advertise the following address blocks:

202.125.96.0/24

As a representative of APNIC Training team, that is the owner of the subnet and ASN, I hereby declare that I am authorized to sign this LOA.

Tashi Phuntsho  
Training Delivery Manager

Email: [tashi@apnic.net](mailto:tashi@apnic.net)  
Phone: +61 7 3858 3114



# Tools & Techniques

- Look up (or ask to enter) details in **internet routing registries** (IRR)
  - describes route origination and inter-AS routing policies

```
tashi@tashi ~-> whois -h whois.radb.net 61.45.248.0/24
route:        61.45.248.0/24
descr:        APNICTRAINING-DC
origin:        AS135533
mnt-by:        MAINT-AS4826
changed:       noc@vocus.com.au 20160702
source:        RADB

route:        61.45.248.0/24
descr:        Prefix for APNICTRAINING LAB - AS135533
origin:        AS135533
mnt-by:        MAINT-AU-APNICTRAININGLAB
country:       AU
last-modified: 2017-10-19T01:36:37Z
source:        APNIC
```

```
tashi@tashi ~-> whois -h whois.radb.net AS17660
aut-num:       AS17660
as-name:       BT-Bhutan
descr:         Divinetworks for BT
admin-c:       DUMY-RIPE
tech-c:        DUMY-RIPE
status:        OTHER
mnt-by:        YP67641-MNT
mnt-by:        ES6436-RIPE
created:        2012-11-29T10:31:33Z
last-modified: 2018-09-04T15:26:24Z
source:        RIPE-NONAUTH
remarks:       *****
remarks:       * THIS OBJECT IS MODIFIED
remarks:       * Please note that all data that is generally regarded as personal
remarks:       * data has been removed from this object.
remarks:       * To view the original object, please query the RIPE Database at:
remarks:       * http://www.ripe.net/whois
remarks:       *****

aut-num:       AS17660
as-name:       DRUKNET-AS
descr:         DrukNet ISP
descr:         Bhutan Telecom
descr:         Thimphu
country:       BT
org:           ORG-BTL2-AP
import:        from AS6461  action pref=100;  accept ANY
export:        to AS6461  announce AS-DRUKNET-TRANSIT
import:        from AS2914  action pref=150;  accept ANY
export:        to AS2914  announce AS-DRUKNET-TRANSIT
import:        from AS6453  action pref=100;  accept ANY
export:        to AS6453  announce AS-DRUKNET-TRANSIT
```

# Tools & Techniques



- IRR
  - *Helps auto generate network (prefix/as-path) filters using RPSL tools*
    - Filter out route advertisements not described in the registry

```
tashi@tashi -> bgpq3 -Al PEER-v4IN AS17660
no ip prefix-list PEER-v4IN
ip prefix-list PEER-v4IN permit 45.64.248.0/22
ip prefix-list PEER-v4IN permit 103.7.252.0/22
ip prefix-list PEER-v4IN permit 103.7.254.0/23
ip prefix-list PEER-v4IN permit 103.245.240.0/22
ip prefix-list PEER-v4IN permit 103.245.242.0/23
ip prefix-list PEER-v4IN permit 119.2.96.0/19
ip prefix-list PEER-v4IN permit 119.2.96.0/20
ip prefix-list PEER-v4IN permit 119.2.96.0/21
ip prefix-list PEER-v4IN permit 202.89.24.0/21
ip prefix-list PEER-v4IN permit 202.144.128.0/19
ip prefix-list PEER-v4IN permit 202.144.128.0/23
ip prefix-list PEER-v4IN permit 202.144.144.0/20
ip prefix-list PEER-v4IN permit 202.144.148.0/22
tashi@tashi -> bgpq3 -6Al PEER-v6IN AS17660
no ipv6 prefix-list PEER-v6IN
ipv6 prefix-list PEER-v6IN permit 2405:d000::/32
ipv6 prefix-list PEER-v6IN permit 2405:d000:7000::/36
```

```
tashi@tashi -> bgpq3 -Ab1 PEER-v4IN AS17660
PEER-v4IN = [
    45.64.248.0/22,
    103.7.252.0/22,
    103.7.254.0/23,
    103.245.240.0/22,
    103.245.242.0/23,
    119.2.96.0/19,
    119.2.96.0/20,
    202.89.24.0/21,
    202.144.128.0/19,
    202.144.128.0/23,
    202.144.144.0/20,
    202.144.148.0/22
];
tashi@tashi -> bgpq3 -6Ab1 PEER-v6IN AS17660
PEER-v6IN = [
    2405:d000::/32,
    2405:d000:7000::/36
];
```

```
tashi@tashi -> bgpq3 -f 38195 -lSUPERLOOP-IN AS-SUPERLOOP
no ip as-path access-list SUPERLOOP-IN
ip as-path access-list SUPERLOOP-IN permit ^38195(_38195)*$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(681|4647|4749|4785)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(4846|4858|7477|7578)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(7585|7604|7628|7631)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(7699|9290|9297|9336)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(9499|9544|9549|10143)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(10145|11031|12041|15133)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(15967|17462|17498|17766)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(17829|17907|17991|18000)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(18110|18201|18292|23156)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(23456|23677|23858|23935)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(24007|24065|24093|24129)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(24231|24233|24238|24341)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(24459|27232|30215|30762)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(36351|37993|38263|38269)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(38451|38534|38549|38570)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(38595|38716|38719|38790)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(38809|38830|38858|42909)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(44239|45158|45267|45278)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(45570|45577|45638|45671)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(45844|46571|55411|55419)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(55455|55506|55575|55707)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(55752|55766|55803|55845)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(55884|55931|55954|56037)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(56098|56135|56178|56225)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(56271|56287|58422|58443)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(58511|58606|58634|58676)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(58712|58739|58750|58868)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(58914|59256|59330|59339)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(59356|60592|60758|63926)$
ip as-path access-list SUPERLOOP-IN permit ^38195(_[0-9]+)*_(63937|63956)$
```

# Tools & Techniques



- Problem(s) with IRR
  - ❑ No single authority model
    - How do I know if a RR entry is genuine and correct?
    - How do I differentiate between a current and a lapsed entry?
  - ❑ Many RRs
    - If two RRs contain conflicting data, which one do I trust and use?
  - ❑ Incomplete data - Not all resources are registered in an IRR
    - If a route is not in a RR, is the route invalid or is the RR just missing data?
  - ❑ Scaling
    - How do I apply IRR filters to upstream(s)?

# Tools & Techniques



- Automating network filters (IRR filters) - **Caution**
  - IRR filters only as good as the correctness of the IRR entries
    - Might require manual overrides and offline verification of resource holders
    - Good idea to use specific sources (`-S` in `bgpq3`, `-s` in `rtconfig`) when generating filters, assuming mirrors are up to date

## Back to basics – identify GOOD




- Could we use a digital signature to convey the “*authority to use*”?
  - Using a private key to *sign* the *authority*, and
  - the public key to *validate* the *authority*
- The idea being:
  - If the holder of the resource has the private key, it can sign/authorize the use of the resource

# How about trust?



- How do we build a chain of trust in this framework??
  - Follow the resource allocation/delegation hierarchy

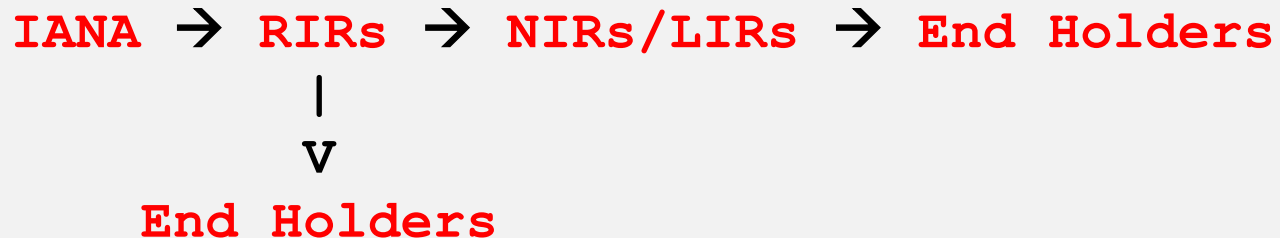

- To describe the address allocation using digital certificates

# RPKI Chain of Trust

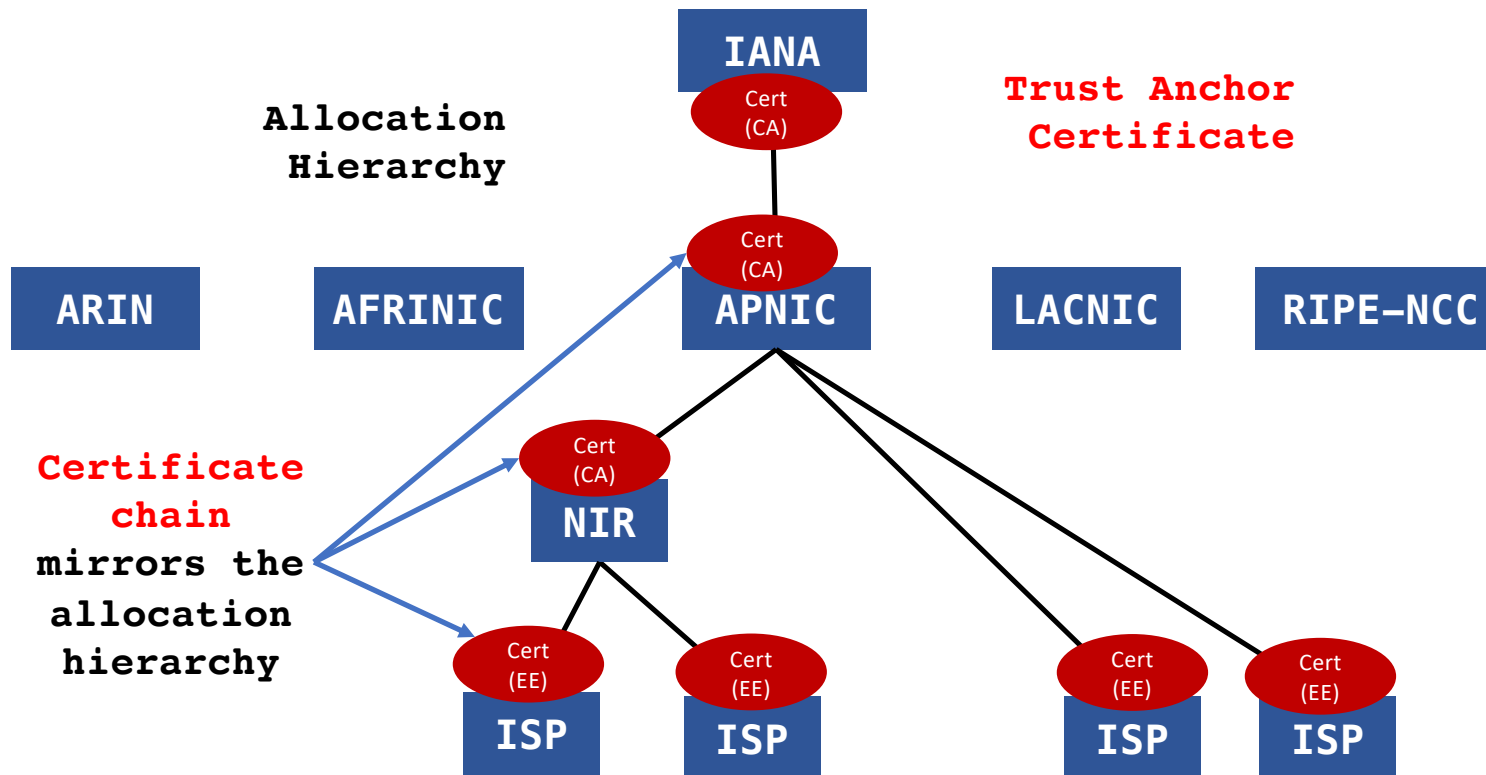


Image 4



# RPKI Chain of Trust



- RIRs hold a self-signed root certificate for all the resources they have in the registry
  - they are the *Trust Anchor* for the system
- The root certificate signs the resource certificates for end-holder allocations
  - binds the resources to the end-holders public key
- Any attestations signed by the end-holder's private key, can now be validated up the chain of trust


# X.509 Certificates recap (RFC5280)



- Associates a public key with an individual or an organization

VERSION	Version of X.509
SERIAL NUMBER	Uniquely identifies the certificate
SIGNATURE ALGORITHM	Algorithms used by the CA to sign the cert
ISSUER NAME	Id of the CA (that issued the cert)
VALIDITY PERIOD	Cert validity
SUBJECT NAME	Entity associated with the public key
SUBJECT PUBLIC KEY	Owner's public key
EXTENSIONS (ISSUER KEY ID)	Identify the pub key of issuer of the cert
EXTENSIONS (SUBJECT KEY ID)	Extra info (owner of the cert)
EXTENSIONS (CRL)	Extensions (CRL)
CA DIGITAL SIGNATURE	Certifies the binding between the pub key & subject of the cert

# RPKI profile ~ Resource Certificates

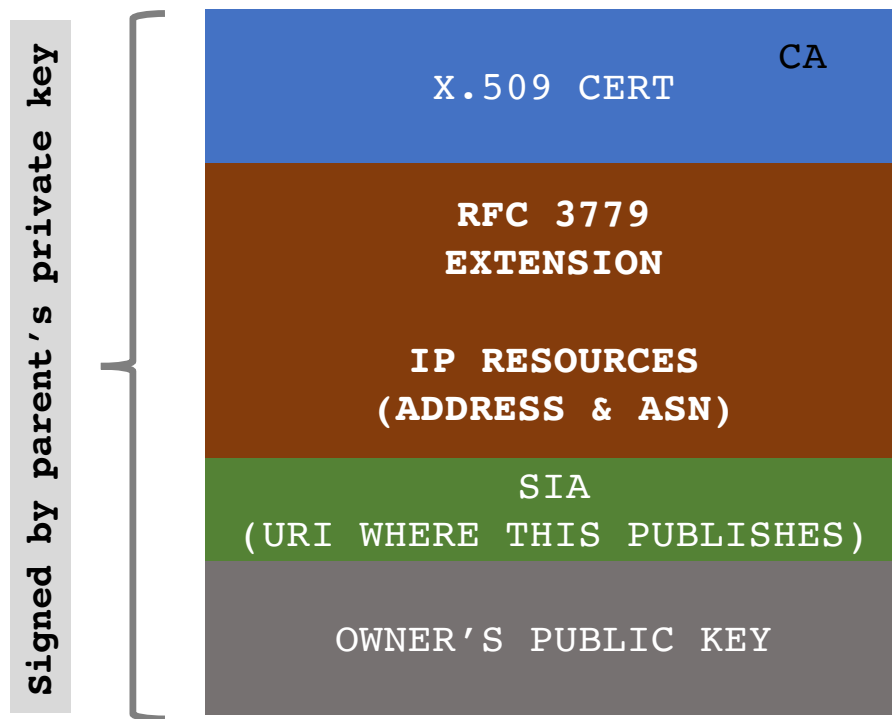

- RFC 3779 extensions – binds a list of resources (**IPv4/v6, ASN**) to the subject of the certificate (private key holder)
- SIA (subject information access) contains a URI that identifies the publication point of the objects signed by the subject of the cert.

# Resource Certificates



- When an address holder **A** (\*IRs) allocates resources (IP address/ASN) to **B** (end holders)
  - **A** issues a public-key/resource certificat that binds the allocated address with **B's** public key, all signed by **A's** (CA) private key
  - The resource certificate proves the holder of the private key (**B**) is the legitimate holder of the number resource!

# Route Origin Authorization (ROA)



- The resource holder (**B**) can now sign *authorities* using its private key, which can be validated by any third party against the TA
- For routing, the address holder can *authorize* a network (ASN) to *originate* a route into the BGP routing system, and **sign** this permission with its private key (ROA)

# Route Origin Authorization (ROA)



- Digitally signed object
  - list of prefixes and the nominated ASN
  - *can be verified cryptographically*

<b>Prefix</b>	203.176.32.0/19
<b>Max-length</b>	/24
<b>Origin ASN</b>	<b>AS17821</b>

- \*\* *Multiple ROAs can exist for the same prefix*

# What can RPKI do?




- Authoritatively proof:
  - Who is the legitimate owner of an address, and
  - Identify which ASNs have the permission from the holder to originate the address
- Hence, can help:
  - prevent **route hijacks/mis-origination/misconfiguration**

# RPKI Components



- **Issuing Party** – Internet Registries (\*IRs)
  - ❑ Certificate Authority (CA) that issues resource certificates to end-holders
  - ❑ Publishes the objects (ROAs) signed by the resource certificate holders

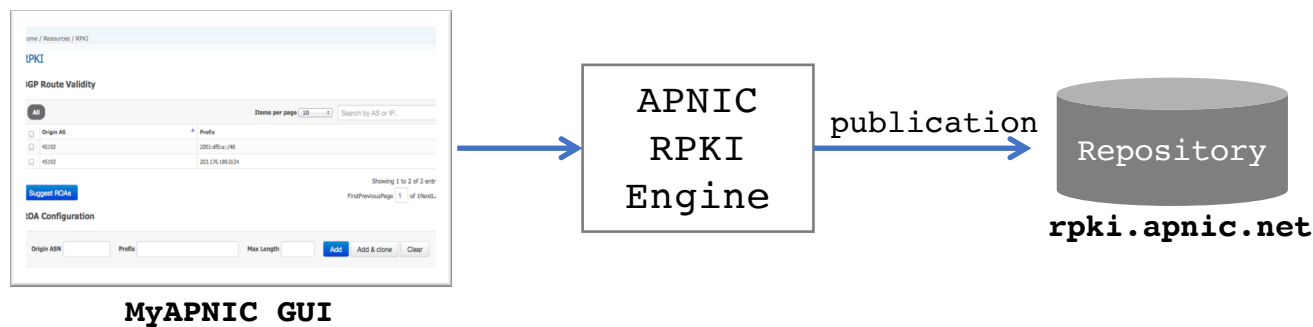




# RPKI Components



- **Relying Party (RP)**

- RPKI Validator tool that gathers data (ROA) from the distributed RPKI repositories
- Validates each entry's signature against the TA to build a "*Validated cache*"

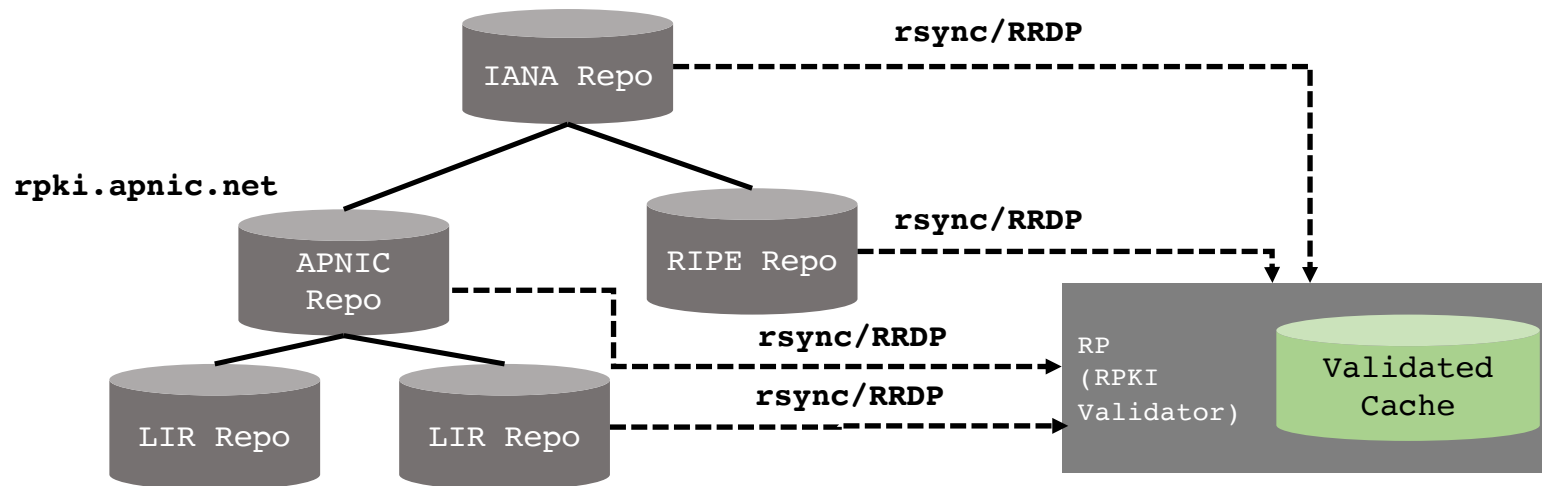


# RPKI Service Models



- Hosted model:
  - The RIR (APNIC) runs the CA functions on members' behalf
    - Manage keys, repo, etc.
    - Generate certificates for resource delegations
- Delegated model:
  - Member becomes the CA (delegated by the parent CA) and operates the full RPKI system
    - JPNIC, TWNIC, CNNIC (IDNIC in progress)

# Route Origin Validation (ROV)

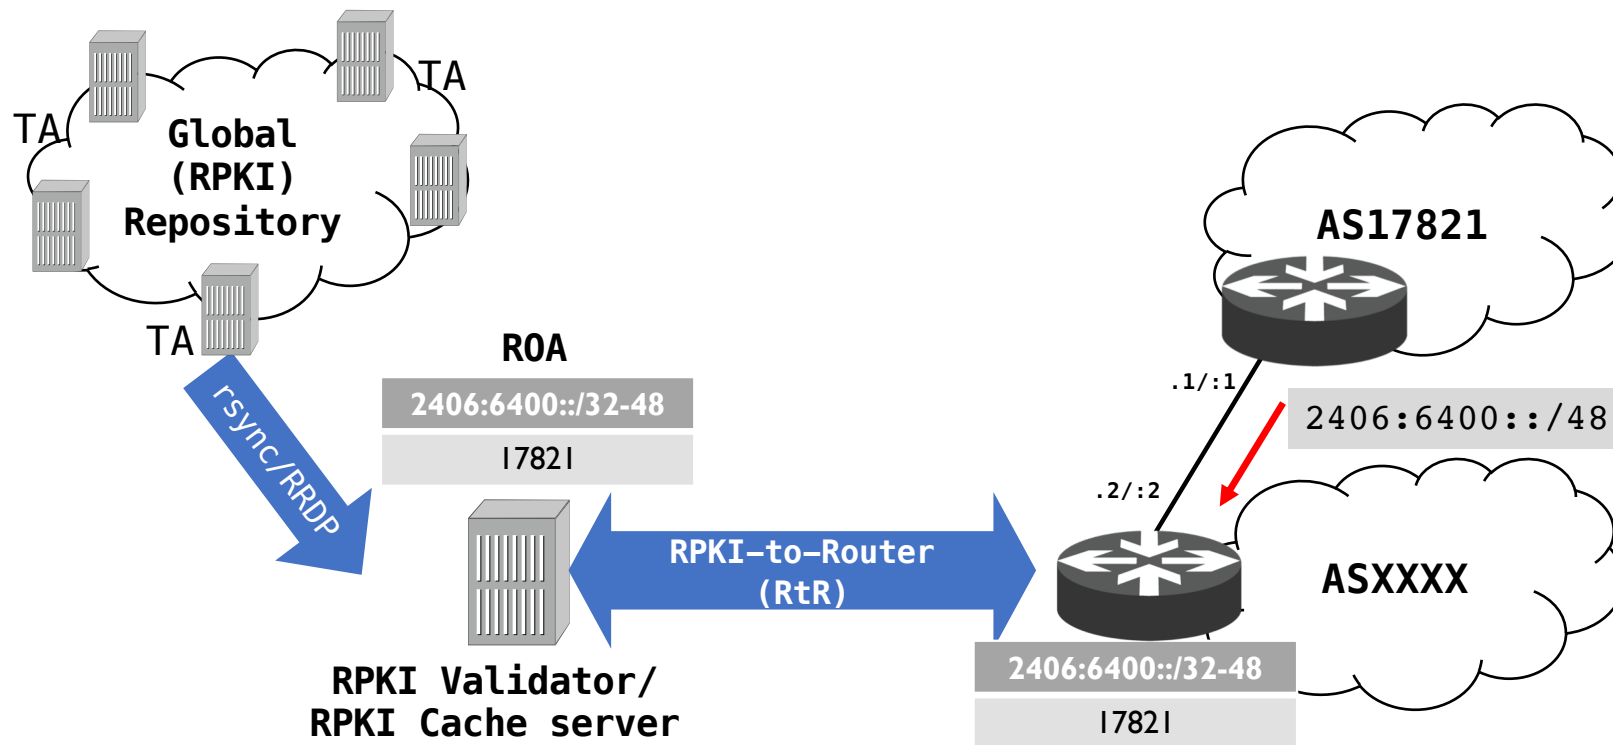

# Route Origin Validation



- Router fetches ROA information from the validated RPKI cache
  - *Crypto stripped by the validator*
- BGP checks each received BGP update against the ROA information and labels them



# Validation States

- **Valid**
  - the prefix and AS pair found in the database.
- **Invalid**
  - prefix is found, but origin AS is wrong, OR
  - the prefix length is longer than the maximum length
- **Not Found/Unknown**
  - No valid ROA found
    - Neither valid nor invalid (perhaps not created)

# Validation States



**ROA** {

ASN	Prefix	Max Length
65420	10.0.0.0/16	18

## BGP Routes

ASN	Prefix	RPKI State
65420	10.0.0.0/16	VALID
65420	10.0.128.0/17	VALID
65421	10.0.0.0/16	INVALID
65420	10.0.10.0/24	INVALID
65430	10.0.0.0/8	NOT FOUND



# Possible actions - RPKI states

- **Do Nothing** (observe & learn)
- **Tag with BGP communities**
  - If you have downstream customers or run a route server (IXP)
    - Let them decide
  - Ex:
    - **Valid** (ASN:65XX1)
    - **Not Found** (ASN:65XX2)
    - **Invalid** (ASN:65XX3)
- **Modify preference values**
  - *RFC7115 (High, Low, Lowest)*
- **Drop Invalids**
  - ~6K IPv4 routes (might want to check your top flows)  
<https://rpki-monitor.antd.nist.gov/index.php?p=3&s=0>

# ROV – Industry trends



- **AT&T** (AS7018) drops Invalids!
  - 11 Feb 2019

## AT&T/as7018 now drops invalid prefixes from peers

Jay Borkenhagen [jayb at braeburn.org](mailto:jayb@braeburn.org)

*Mon Feb 11 14:53:45 UTC 2019*

- Previous message (by thread): [BGP topological vs centralized route reflector](#)
- Next message (by thread): [AT&T/as7018 now drops invalid prefixes from peers](#)
- Messages sorted by: [\[ date \]](#) [\[ thread \]](#) [\[ subject \]](#) [\[ author \]](#)

---

FYI:

The AT&T/as7018 network is now dropping all RPKI-invalid route announcements that we receive from our peers.

We continue to accept invalid route announcements from our customers, at least for now. We are communicating with our customers whose invalid announcements we are propagating, informing them that these routes will be accepted by fewer and fewer networks over time.

Thanks to those of you who are publishing ROAs in the RPKI. We would also like to encourage other networks to join us in taking this step to improve the quality of routing information in the Internet.

Thanks!

Jay B.



# ROV – Industry trends



- **Workonline Comms (AS37271) & SEACOM (AS37100) drops Invalids!**
  - 1 and 5 April 2019 (does not use ARIN's TAL)

## [apops] RPKI ROV & Dropping of Invalids - Africa

- **To:** [apops@apops.net](mailto:apops@apops.net)
- **Subject:** [apops] RPKI ROV & Dropping of Invalids - Africa
- **From:** Mark Tinka <[mark.tinka@seacom.mu](mailto:mark.tinka@seacom.mu)>
- **Date:** Tue, 9 Apr 2019 14:05:03 +0200

Hello all.

In November 2018 during the ZAPF (South Africa Peering Forum) meeting in Cape Town, 3 major ISP's in Africa announced that they would enable RPKI's ROV (Route Origin Validation) and the dropping of Invalid routes as part of an effort to clean up the BGP Internet, on the 1st April, 2019.

On the 1st of April, Workonline Communications (AS37271) enabled ROV and the dropping of Invalid routes. This applies to all eBGP sessions for IPv4 and IPv6.

On the 5th of April, SEACOM (AS37100) enabled ROV and the dropping of Invalid routes. This applies to all eBGP sessions with public peers, private peers and transit providers, both for IPv4 and IPv6. eBGP sessions toward downstream customers will follow in 3 months from now.

We are still standing by for the 3rd ISP to complete their implementation, and we are certain they will communicate with the community accordingly.

Please note that for the legal reasons previously discussed on various fora, neither Workonline Communications nor SEACOM are utilising the ARIN TAL. As a result, any routes covered only by a ROA issued under the ARIN TAL will fall back to a status of Not Found. Unfortunately, this means that ARIN members will not see any improved routing security for their prefixes on our networks until this is resolved. We will each re-evaluate this decision if and when ARIN's policy changes. We are hopeful that this will happen sooner rather than later.

If you interconnect with either of us and may be experiencing any routing issues potentially related to this new policy, please feel free to reach out to:

- [noc@workonline.africa](mailto:noc@workonline.africa)
- [peering@seacom.mu](mailto:peering@seacom.mu)

Workonline Communications and SEACOM hope that this move encourages the rest of the ISP community around the world to ramp up their deployment of RPKI ROV and dropping of Invalid routes, as we appreciate the work that AT&T have carried out in the same vein.

In the mean time, we are happy to answer any questions you may have about our deployments. Thanks.

Mark Tinka (SEACOM) & Ben Maddison (Workonline Communications).




## Are ROAs enough?

- What if I forge the origin AS in the AS path?
  - Would be accepted as “good” – pass origin validation!
- Which means, we need to secure the AS path as well
  - Need AS path validation (per-prefix)
- We can use RPKI certificates for this

$$(\lambda_1 \lambda_2 \lambda_3 \lambda_4 \lambda_5 \lambda_6 \lambda_7 \lambda_8 \lambda_9 \lambda_{10})$$


# AS path validation - BGPsec

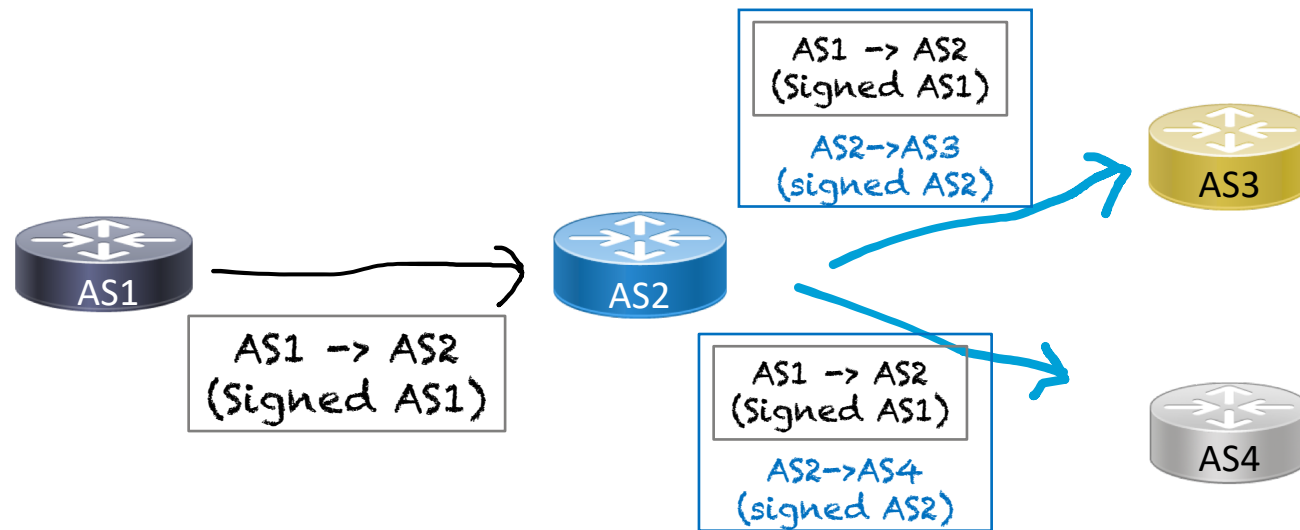

- AS1 router crypto signs the message to AS2
  - AS2 router signs the message to AS3 and AS4, encapsulating AS1's message
- A BGPsec speaker validates the received update by checking:
- If there is a ROA that describes the prefix and origin AS
  - If the received AS path can be validated as a chain of signatures (for each AS in the AS path) using the AS keys

# So why is AS path validation NOT happening?



- Cannot have partial adoption
  - Cannot jump across non-participating networks
- More HW resources
  - CPU - high crypto overhead to validate signatures, and
  - Memory
    - Updates in BGPsec would be per prefix
    - New attributes carrying signatures and certs/key IDs for every AS in the AS path
- No clarity on how to distribute the collection of certificates required to validate the signatures
- Given so much overhead, can it prevent more than route hijacks?
  - Route leaks?

# RPKI Further Reading



X.509 PKI Certificates



Extensions for IP Addresses and ASNs



Resource Public Key Infrastructure

# Acknowledgement

---



- Geoff Huston, APNIC
- Randy Bush, IJJ Labs/Arrcus


# Implementation



# Create & publish your ROA



- Login to MyANIC
  - Go to **Resources** → **Route Management** (see image below)

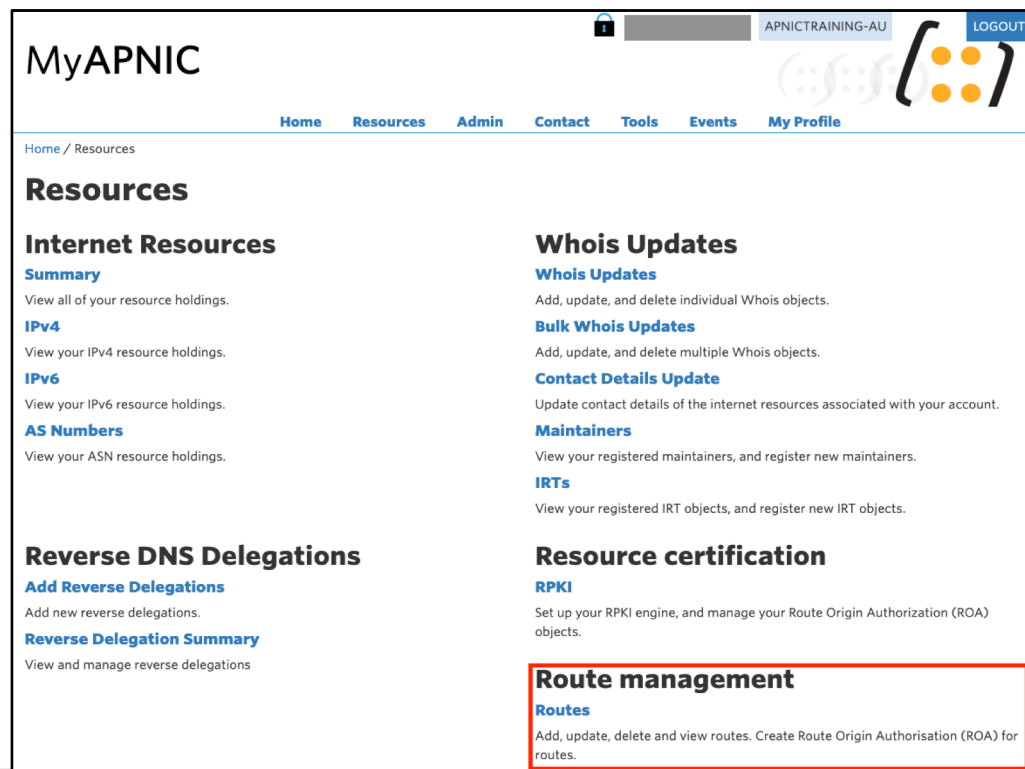

# Create (publish) your ROA



- Select **Create route** (as shown below)

Home / Resources / Routes

## Routes

[Requests](#)

**Routes**

Register your routes in MyAPNIC using the tool below. It will automatically create route objects in the APNIC Whois Database with any AS number you have authorized. RPKI ROAs will also be created at the same time, if the ROA option is enabled (changes to RPKI may take around ten minutes to propagate so the ROA status will not be updated until then).

**Create route** **Delete selected**

Show  entries Search:

	Route	Origin AS	ROA status	Whois status	Actions
<input type="checkbox"/>	2001:df0:a::/48	AS45192	✓	✓	<input type="button" value="Edit"/> <input type="button" value="Delete"/>
<input type="checkbox"/>	2001:df2:ee00::/48	AS131107	✓	✓	<input type="button" value="Edit"/> <input type="button" value="Delete"/>
<input type="checkbox"/>	2001:df2:ee01::/48	AS45192	✓	✓	<input type="button" value="Edit"/> <input type="button" value="Delete"/>
<input type="checkbox"/>	202.125.96.0/24	AS131107	✓	✓	<input type="button" value="Edit"/> <input type="button" value="Delete"/>
<input type="checkbox"/>	202.125.97.0/24	AS45192	✓	✓	<input type="button" value="Edit"/> <input type="button" value="Delete"/>

# Create (publish) your ROA



- Example for **IPv6** below

**Create route**

Prefix 2406:6400::/32

Origin AS 45192

MSA /48

ROA ☒ Enabled

Whois ☐ Enabled

Options ☐ Notify additional contacts

Cancel Next

**Create route**

Prefix 2406:6400::/32

Origin AS 45192

MSA /48  
Distance from most specific announcement to prefix length must be less than 16 if Whois is enabled (current distance: 16)

ROA ☒ Enabled

Whois ☒ Enabled

☐ Define Whois route attributes

Options ☐ Notify additional contacts

Cancel Next

# Create (publish) your ROA



**Confirm route creation**

<b>ROA</b>	Enabled
<b>Whois</b>	Disabled
<b>Prefix</b>	2406:6400::/32
<b>Origin AS</b>	45192
<b>Most specific announcement</b>	/48 (distance from prefix length: 16)

*\*Sub-route management is only available when the distance from the most specific announcement to the prefix length is less than 16*

CancelGo backSubmit

# Create (publish) your ROA



- Example for **IPv4**

**Create route**

**Prefix** 61.45.248.0/21

**Origin AS** 45192

**MSA** /24

**ROA** ☒ Enabled

**Whois** ☒ Enabled

☐ Define Whois route attributes

**Options** ☐ Notify additional contacts

Cancel Next

**Confirm route creation**

**ROA** Enabled

**Whois** Enabled

**Prefix** 61.45.248.0/21

**Origin AS** 45192

**Most specific announcement** /24 (distance from prefix length: 3)

Select the sub-routes to be enabled:

Show 10 entries Search:

Select all Deselect all

Route
<input checked="" type="checkbox"/> 61.45.248.0/21
<input checked="" type="checkbox"/> 61.45.248.0/22
<input checked="" type="checkbox"/> 61.45.248.0/23
<input checked="" type="checkbox"/> 61.45.248.0/24
<input checked="" type="checkbox"/> 61.45.249.0/24
<input checked="" type="checkbox"/> 61.45.250.0/23
<input checked="" type="checkbox"/> 61.45.250.0/24
<input checked="" type="checkbox"/> 61.45.251.0/24
<input checked="" type="checkbox"/> 61.45.252.0/22
<input checked="" type="checkbox"/> 61.45.252.0/23

Showing 1 to 10 of 15 entries 15 rows selected

Previous 1 2 Next

Cancel Go back Submit

# Create (publish) your ROA



- Your ROAs are ready!

## Routes

**Routes**

Register your routes in MyAPNIC using the tool below. It will automatically create route objects in the APNIC Whois Data authorized. RPKI ROAs will also be created at the same time, if the ROA option is enabled (changes to RPKI may take around 24 hours, and ROA status will not be updated until then).

Create route Delete selected

Show 10 entries

Select all Deselect all

	Route	Origin AS	ROA status	Whois status
<input type="checkbox"/>	2001:df0:a::/48	AS45192	✓	✓
<input type="checkbox"/>	2001:df2:ee00::/48	AS131107	✓	✓
<input type="checkbox"/>	2001:df2:ee01::/48	AS45192	✓	✓
<input type="checkbox"/>	202.125.96.0/24	AS131107	✓	✓
<input type="checkbox"/>	202.125.97.0/24	AS45192	✓	✓
<input type="checkbox"/>	203.30.127.0/24	AS135541	✓	✓
<input type="checkbox"/>	2406:6400::/32	AS45192	✓	⊘

# Check your ROA



<http://nong.rand.apnic.net:8080/roas>

## Validated ROAs

Validated ROAs from **APNIC RPKI Root**, **ARIN**, **AfriNIC RPKI Root**, **LACNIC RPKI Root**, **RIPE NCC RPKI Root**.

Show 10 entries

Search: 61.45.248.0

ASN	Prefix	Maximum Length	Trust Anchor
135533	61.45.248.0/24	24	APNIC RPKI Root

# Check your ROA



```
# whois -h rr.ntt.net 2001:df2:ee00::/48
```

```
route6:      2001:df2:ee00::/48
descr:       RPKI ROA for 2001:df2:ee00::/48
remarks:     This route object represents routing data retrieved from the RPKI
remarks:     The original data can be found here: https://rpki.gin.ntt.net/r/AS131107/2001:df2:ee00::/48
remarks:     This route object is the result of an automated RPKI-to-IRR conversion process.
remarks:     maxLength 48
origin:      AS131107
mnt-by:      MAINT-JOB
changed:     job@ntt.net 20180802
source:      RPKI # Trust Anchor: APNIC RPKI Root
```



# Check your ROA



```
# whois -h whois.bgpmon.net 2001:df2:ee00::/48
```

```
Prefix:                2001:df2:ee00::/48
Prefix description:    APNICTRAINING-DC
Country code:         AU
Origin AS:            131107
Origin AS Name:       APNICTRAINING LAB DC
RPKI status:          ROA validation successful
First seen:           2016-06-30
Last seen:            2018-01-21
Seen by #peers:       97
```

```
# whois -h whois.bgpmon.net "--roa 131107 2001:df2:ee00::/48"
```


```
-----
ROA Details
-----
```

```
Origin ASN:           AS131107
Not valid Before:     2016-09-07 02:10:04
Not valid After:      2020-07-30 00:00:00 Expires in 2y190d9h34m23.2000000029802s
Trust Anchor:         rpki.apnic.net
Prefixes:             2001:df2:ee00::/48 (max length /48) 202.125.96.0/24 (max length /24)
```

# Check your ROA



<https://bgp.he.net/>

Announced By		
Origin AS	Announcement	Description
<a href="#">AS131107</a>	<a href="#">2001:df2:ee00::/48</a> 	testing

# Deploy RPKI Validator



- Many options:

- ❑ RIPE RPKI Validator

<https://www.ripe.net/manage-ips-and-asns/resource-management/certification/tools-and-resources>

- ❑ Dragon Research Labs RPKI Toolkit

<https://github.com/dragonresearch/rpki.net>

- ❑ Routinator

<https://github.com/NLnetLabs/routinator>

- ❑ OctoRPKI & GoRTR (Cloudflare's RPKI toolkit)

<https://github.com/cloudflare/cfrpki>

# Configuration (IOS)



- Establishing session with the validator

```
router bgp 131107  
  bgp rpki server tcp <validator-IP> port <323/8282/3323> refresh 120
```

- Note:

- Cisco IOS by default does not include invalid routes for best path selection!
- If you don't want to drop invalids, we need explicitly tell BGP (under respective address families)

```
bgp bestpath prefix-validate allow-invalid
```

# Configuration (IOS)



- Policies based on validation:

```
route-map ROUTE-VALIDATION permit 10
  match rpki valid
  set local-preference 110
!
route-map ROUTE-VALIDATION permit 20
  match rpki not-found
  set local-preference 100
!
route-map ROUTE-VALIDATION permit 10
  match rpki invalid
  set local-preference 90
!
```

# Configuration (IOS)



- Apply the route-map to inbound updates

```
router bgp 131107
!---output omitted-----!
address-family ipv4
  bgp bestpath prefix-validate allow-invalid
  neighbor X.X.X.169 activate
  neighbor X.X.X.169 route-map ROUTE-VALIDATION in
exit-address-family
!
address-family ipv6
  bgp bestpath prefix-validate allow-invalid
  neighbor X6:X6:X6:X6::151 activate
  neighbor X6:X6:X6:X6::151 route-map ROUTE-VALIDATION in
exit-address-family
!
```

# Configuration (JunOS)



- Establishing session with the validator

```
routing-options {  
  autonomous-system 131107;  
  validation {  
    group rpki-validator {  
      session <validator-IP> {  
        refresh-time 120;  
        port <323/3323/8282>;  
        local-address X.X.X.253;  
      }  
    }  
  }  
}
```

# Configuration (JunOS)



- Define policies based on the validation states

```
policy-options {  
  policy-statement ROUTE-VALIDATION {  
    term valid {  
      from {  
        protocol bgp;  
        validation-database valid;  
      }  
      then {  
        local-preference 110;  
        validation-state valid;  
        accept;  
      }  
    }  
    term invalid {  
      from {  
        protocol bgp;  
        validation-database invalid;  
      }  
      then {  
        local-preference 90;  
        validation-state invalid;  
        accept;  
      }  
    }  
  }  
}
```

```
term unknown {  
  from {  
    protocol bgp;  
    validation-database unknown;  
  }  
  then {  
    local-preference 100;  
    validation-state unknown;  
    accept;  
  }  
}  
}
```



# Router Configuration (JunOS)



- Apply the policy to inbound updates

```
protocols {
  bgp {
    group external-peers {
      #output-ommitted
      neighbor X.X.X.1 {
        import ROUTE-VALIDATION;
        family inet {
          unicast;
        }
      }
    }
  }
}

group external-peers-v6 {
  #output-ommitted
  neighbor X6:X6:X6:X6::1 {
    import ROUTE-VALIDATION;
    family inet6 {
      unicast;
    }
  }
}
```

# RPKI Verification (IOS)



- IOS has only

```
#sh bgp ipv6 unicast rpki ?  
servers Display RPKI cache server information  
table    Display RPKI table entries
```

```
#sh bgp ipv4 unicast rpki ?  
servers Display RPKI cache server information  
table    Display RPKI table entries
```

# RPKI Verification (IOS)



- Check the RTR session

```
#sh bgp ipv4 unicast rpki servers
```

```
BGP SOVC neighbor is X.X.X.47/323 connected to port 323  
Flags 64, Refresh time is 120, Serial number is 1516477445, Session ID is 8871  
InQ has 0 messages, OutQ has 0 messages, formatted msg 7826  
Session IO flags 3, Session flags 4008  
Neighbor Statistics:  
Prefixes 45661  
Connection attempts: 1  
Connection failures: 0  
Errors sent: 0  
Errors received: 0  
  
Connection state is ESTAB, I/O status: 1, unread input bytes: 0  
Connection is ECN Disabled, Minimum incoming TTL 0, Outgoing TTL 255  
Local host: X.X.X.225, Local port: 29831  
Foreign host: X.X.X.47, Foreign port: 323
```

# RPKI Verification (IOS)



- Check the RPKI cache

## **#sh bgp ipv4 unicast rpkf table**

37868 BGP sovc network entries using 6058880 bytes of memory  
39655 BGP sovc record entries using 1268960 bytes of memory

Network	Maxlen	Origin-AS	Source	Neighbor
1.9.0.0/16	24	4788	0	202.125.96.47/323
1.9.12.0/24	24	65037	0	202.125.96.47/323
1.9.21.0/24	24	24514	0	202.125.96.47/323
1.9.23.0/24	24	65120	0	202.125.96.47/323

## **#sh bgp ipv6 unicast rpkf table**

5309 BGP sovc network entries using 976856 bytes of memory  
6006 BGP sovc record entries using 192192 bytes of memory

Network	Maxlen	Origin-AS	Source	Neighbor
2001:200::/32	32	2500	0	202.125.96.47/323
2001:200:136::/48	48	9367	0	202.125.96.47/323
2001:200:900::/40	40	7660	0	202.125.96.47/323
2001:200:8000::/35	35	4690	0	202.125.96.47/323

# Check routes (IOS)



```
#sh bgp ipv4 unicast 202.144.128.0/19
BGP routing table entry for 202.144.128.0/19, version 3814371
Paths: (1 available, best #1, table default)
  Advertise to update-groups:
    2
  Refresh Epoch 15
  4826 17660
    49.255.232.169 from 49.255.232.169 (114.31.194.12)
      Origin IGP, metric 0, localpref 110, valid, external, best
      Community: 4826:5101 4826:6570 4826:51011 24115:17660
      path 7F50C7CD98C8 RPKI State valid
      rx pathid: 0, tx pathid: 0x0
```

```
#sh bgp ipv6 unicast 2402:7800::/32
BGP routing table entry for 2402:7800::/32, version 1157916
Paths: (1 available, best #1, table default)
  Advertise to update-groups:
    2
  Refresh Epoch 15
  4826
    2402:7800:10:2::151 from 2402:7800:10:2::151 (114.31.194.12)
      Origin IGP, metric 0, localpref 100, valid, external, best
      Community: 4826:1000 4826:2050 4826:2110 4826:2540 4826:2900 4826:5203
      path 7F50B266CBD8 RPKI State not found
      rx pathid: 0, tx pathid: 0x0
```

# RPKI Verification (JunOS)



- Check the RPKI cache

```
>show validation session
```

Session	State	Flaps	Uptime	#IPv4/IPv6 records
X.X.X.46	Up	75	09:20:59	40894/6747

```
>show validation session 202.125.96.46
```

Session	State	Flaps	Uptime	#IPv4/IPv6 records
X.X.X.46	Up	75	09:21:18	40894/6747

# RPKI Verification (JunOS)



- Check the RPKI cache

```
>show validation database
RV database for instance master
```

Prefix	Origin-AS	Session	State	Mismatch
1.9.0.0/16-24	4788	202.125.96.46	valid	
1.9.12.0/24-24	65037	202.125.96.46	valid	
1.9.21.0/24-24	24514	202.125.96.46	valid	
1.9.23.0/24-24	65120	202.125.96.46	valid	
-----				
2001:200::/32-32	2500	202.125.96.46	valid	
2001:200:136::/48-48	9367	202.125.96.46	valid	
2001:200:900::/40-40	7660	202.125.96.46	valid	
2001:200:8000::/35-35	4690	202.125.96.46	valid	
2001:200:c000::/35-35	23634	202.125.96.46	valid	
2001:200:e000::/35-35	7660	202.125.96.46	valid	

*Would have been nice if they had per AF!*

# RPKI Verification (JunOS)



- Can filter per origin ASN

```
>show validation database origin-autonomous-system 45192
RV database for instance master
```

Prefix	Origin-AS	Session	State	Mismatch
202.125.97.0/24-24	45192	202.125.96.46	valid	
203.176.189.0/24-24	45192	202.125.96.46	valid	
2001:df2:ee01::/48-48	45192	202.125.96.46	valid	

```
IPv4 records: 2
IPv6 records: 1
```

*IOS should have something similar!*



# Check routes (JunOS)



```
>show route protocol bgp 202.144.128.0
```

```
inet.0: 693024 destinations, 693024 routes (693022 active, 0 holddown, 2 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
202.144.128.0/20 *[BGP/170] 1w4d 21:03:04, MED 0, localpref 110, from 202.125.96.254
```

```
AS path: 4826 17660 I, validation-state: valid  
>to 202.125.96.225 via ge-1/1/0.0
```

```
>show route protocol bgp 2001:201::/32
```

```
inet6.0: 93909 destinations, 93910 routes (93909 active, 0 holddown, 0 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```


```
2001:201::/32 *[BGP/170] 21:18:14, MED 0, localpref 100, from 2001:df2:ee00::1
```

```
AS path: 65332 I, validation-state: unknown  
>to fe80::dab1:90ff:fedc:fd07 via ge-1/1/0.0
```

# Propagating RPKI states to iBGP peers



- To avoid every BGP speaker having an RTR session, and
- All BGP speakers have consistent information
  - Relies on extended BGP communities (RFC8097)

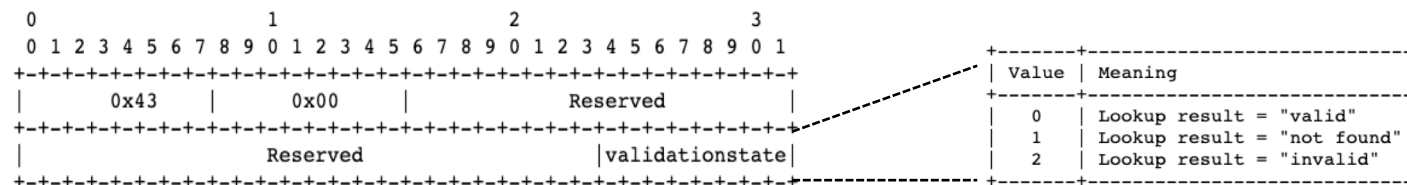

- Sender (one that has RTR session) attaches the extended community to Updates, and receiver derives the validation states from it
- Must be enabled on both sender and receiver!

# Propagating RPKI states (IOS)



- Sender (one with RTR session)

```
router bgp 131107
  bgp rpki server tcp <validator-IP> port <323/8282/3323> refresh 120
  !---output omitted-----!
  address-family ipv4
    neighbor X.X.X.X activate
    neighbor X.X.X.X send-community both
    neighbor X.X.X.X announce rpki state
  exit-address-family
  !
  address-family ipv6
    neighbor X6:X6:X6:X6::X6 activate
    neighbor X6:X6:X6:X6::X6 send-community both
    neighbor X6:X6:X6:X6::X6 announce rpki state
  exit-address-family
  !
```

# Propagating RPKI states (IOS)



- Receiver (iBGP peer)

```
router bgp 131107
!---output omitted-----!
address-family ipv4
  neighbor Y.Y.Y.Y activate
  neighbor Y.Y.Y.Y send-community both
  neighbor Y.Y.Y.Y announce rpki state
exit-address-family
!
address-family ipv6
  neighbor Y6:Y6:Y6:Y6::Y6 activate
  neighbor Y6:Y6:Y6:Y6::Y6 send-community both
  neighbor Y6:Y6:Y6:Y6::Y6 announce rpki state
exit-address-family
!
```

- If `announce rpki state` is not configured for the neighbor, all prefixes received from the iBGP neighbor will be marked VALID!

# Propagating RPKI states (JunOS)



- Sender (one with RTR session)

```
policy-statement ROUTE-VALIDATION {  
  term valid {  
    from {  
      protocol bgp;  
      validation-database valid;  
    }  
    then {  
      local-preference 110;  
      validation-state valid;  
      community add origin-validation-state-valid;  
      accept;  
    }  
  }  
  term invalid {  
    from {  
      protocol bgp;  
      validation-database invalid;  
    }  
    then {  
      local-preference 90;  
      validation-state invalid;  
      community add origin-validation-state-invalid;  
      accept;  
    }  
  }  
}
```

```
term unknown {  
  from {  
    protocol bgp;  
    validation-database unknown;  
  }  
  then {  
    local-preference 100;  
    validation-state unknown;  
    community add origin-validation-state-unknown;  
    accept;  
  }  
}  
}
```

# Propagating RPKI states (JunOS)



- Receiver (iBGP peer)

```
policy-statement ROUTE-VALIDATION-1 {  
  term valid {  
    from community origin-validation-state-valid;  
    then validation-state valid;  
  }  
  term invalid {  
    from community origin-validation-state-invalid;  
    then validation-state invalid;  
  }  
  term unknown {  
    from community origin-validation-state-unknown;  
    then validation-state unknown;  
  }  
}
```

# Propagating RPKI states – potential issues



- IOS as BR, propagating states to JunOS iBGP peers

`unknown iana 4300`

- Hack:

- Either act on the states at the border, or
- Match and tag them with custom communities before propagating

# Configuration - Reference Link



- **Cisco**

- [https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/iproute\\_bgp/configuration/xe-3s/irg-xe-3s-book/irg-origin-as.pdf](https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/iproute_bgp/configuration/xe-3s/irg-xe-3s-book/irg-origin-as.pdf)

- **Juniper**

- [https://www.juniper.net/documentation/en\\_US/junos/topics/topic-map/bgp-origin-as-validation.html](https://www.juniper.net/documentation/en_US/junos/topics/topic-map/bgp-origin-as-validation.html)

- **RIPE:**

- <https://www.ripe.net/manage-ips-and-asns/resource-management/certification/router-configuration>



# Operational Caveats



- When RTR session goes down, the validation state changes to **Not Found** for all routes after a while
  - **Invalid** => **Not Found**
  - **we need at least two RTR sessions** and/or need careful filtering policies
- During a router reload, do we receive ROAs first or BGP updates first?
  - If BGP update is faster than ROA, will propagate even invalid routes to its iBGP peers

# Useful tools



- RIPEstat – prefix/ASN

- <https://stat.ripe.net/data/rpki-validation/data.json?resource=45192&prefix=202.125.96.0/24>

JSON		Raw Data	Headers
Save	Copy	Collapse All	Expand All
status:	"ok"		
server_id:	"app004"		
status_code:	200		
version:	"0.2"		
cached:	false		
see_also:	[]		
time:	"2019-04-09T08:44:30.058267"		
messages:	[]		
data_call_status:	"supported"		
process_time:	34		
build_version:	"2019.4.8.82"		
query_id:	"20190409084430-516c3d0b-4a99-4096-9ed6-2112d5d07d36"		
data:			
validating_roas:			
0:			
origin:	"AS131107"		
source:	"APNIC RPKI Root"		
prefix:	"202.125.96.0/24"		
max_length:	24		
validity:	"invalid_asn"		
status:	"invalid_asn"		
prefix:	"202.125.96.0/24"		
resource:	"45192"		



<https://www.apnic.net/community/security/resource-certification/#routing>

# Any questions?

