BGP Best Current Practices

ISP Workshops




These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (http://creativecommons.org/licenses/by-nc/4.0/)

Acknowledgements

- This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- Bug fixes and improvements are welcomed
 - Please email workshop (at) bgp4all.com

BGP Videos

- NSRC has produced a library of BGP presentations (including this one), recorded on video, for the whole community to use
 - https://learn.nsrc.org/bgp

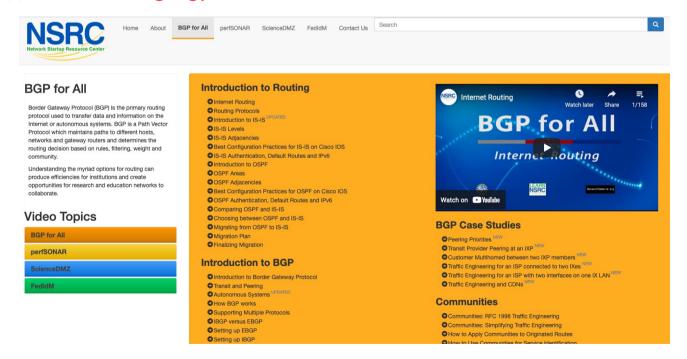


Configuring BGP

Where do we start?

Cisco IOS Good Practices

ISPs should start off with the following BGP commands as a basic template:

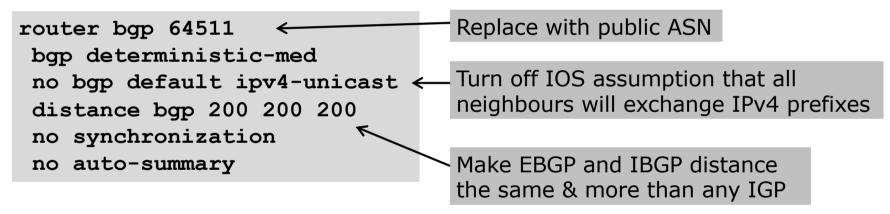

EBGP Default Behaviour

- Industry standard is described in RFC8212
 - https://tools.ietf.org/html/rfc8212
 - External BGP (EBGP) Route Propagation Behaviour without Policies
- NB: BGP in Cisco IOS is permissive by default
 - This is contrary to industry standard and RFC8212
- Configuring BGP peering without using filters means:
 - All best paths on the local router are passed to the neighbour
 - All routes announced by the neighbour are received by the local router
 - Can have disastrous consequences (see RFC8212)

EBGP Default Behaviour

■ Best practice is to ensure that each EBGP neighbour has inbound and outbound filter applied:

```
router bgp 64511
address-family ipv4
neighbor 100.64.0.1 remote-as 64510
neighbor 100.64.0.1 prefix-list as64510-in in
neighbor 100.64.0.1 prefix-list as64510-out out
neighbor 100.64.0.1 activate
```

EBGP Default Behaviour

- FRR turns on RFC8212 support by default:
 - https://frrouting.org/

No prefixes will be sent or received to external peers in the absence of inbound and outbound policy

What is BGP for??

What is an IGP not for?

BGP versus OSPF/ISIS

- Internal Routing Protocols (IGPs)
 - Examples are IS-IS and OSPF
 - Used for carrying infrastructure addresses
 - NOT used for carrying Internet prefixes or customer prefixes
 - Design goal is to minimise number of prefixes in IGP to aid scalability and rapid convergence

BGP versus OSPF/IS-IS

- □ BGP is used
 - Internally (IBGP)
 - Externally (EBGP)
- IBGP is used to carry:
 - Some/all Internet prefixes across backbone
 - Customer prefixes
- □ EBGP is used to:
 - Exchange prefixes with other ASes
 - Implement routing policy

BGP versus OSPF/IS-IS

□ DO NOT:

- Distribute BGP prefixes into an IGP
- Distribute IGP routes into BGP
- Use an IGP to carry customer prefixes

□ YOUR NETWORK WILL NOT SCALE

Aggregation

Aggregation

- Aggregation means announcing the address block received from the RIR to the other ASes connected to your network
- Subprefixes of this aggregate may be:
 - Used internally in the ISP network
 - Announced to other ASes to aid with multihoming
- Too many operators are still thinking about class Cs, resulting in a proliferation of /24s in the Internet routing table
 - May 2021: 498733 /24s in IPv4 table of 857992 prefixes
- The same is happening for /48s with IPv6
 - May 2021: 54043 /48s in IPv6 table of 115991 prefixes

Configuring Aggregation – Cisco IOS

- □ ISP has 100.66.0.0/19 address block
- To put into BGP as an aggregate:

```
router bgp 64511
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
ip route 100.66.0.0 255.255.224.0 null0
```

- The static route is a "pull up" route
 - More specific prefixes within this address block ensure connectivity to ISP's customers
 - "Longest match" lookup

Aggregation

- Address block should be announced to the Internet as an aggregate
- Subprefixes of address block should NOT be announced to Internet unless for traffic engineering
 - See BGP Multihoming presentations
- Aggregate should be generated internally
 - Not on the network borders!

Announcing Aggregate – Cisco IOS


Configuration Example

```
router bgp 64511
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list out-filter out
neighbor 100.67.10.1 prefix-list default in
neighbor 100.67.10.1 activate
!
ip route 100.66.0.0 255.255.224.0 null0
!
ip prefix-list out-filter permit 100.66.0.0/19
ip prefix-list out-filter deny 0.0.0.0/0 le 32
!
ip prefix-list default permit 0.0.0.0/0
```

Announcing an Aggregate

- ISPs who don't and won't aggregate are held in poor regard by community
- Registries publish their minimum allocation size
 - For IPv4:
 - **1** /24
 - For IPv6:
 - /48 for assignment, /32 for allocation
- Until 2010, there was no real reason to see anything longer than a /22 IPv4 prefix on the Internet. But now?
 - IPv4 run-out is having an impact

Aggregation – Example

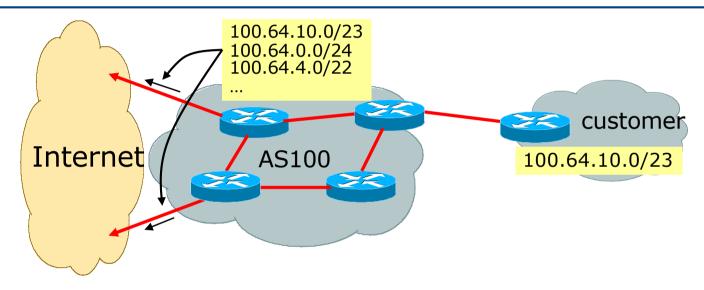

- Customer has /23 network assigned from AS100's /19 address block
- □ AS100 announces customers' individual networks to the Internet


Aggregation – Bad Example

- Customer link goes down
 - Their /23 network becomes unreachable
 - /23 is withdrawn from AS100's IBGP
- Their ISP doesn't aggregate its /19 network block
 - /23 network withdrawal announced to peers
 - Starts rippling through the Internet
 - Added load on all Internet backbone routers as network is removed from routing table

Customer link returns

- Their /23 network is now visible to their ISP
- Their /23 network is re-advertised to peers
- Starts rippling through Internet
- Load on Internet backbone routers as network is reinserted into routing table
- Some ISP's suppress the flaps
- Internet may take 10-20 min or longer to be visible
- Where is the Quality of Service???

Aggregation – Example

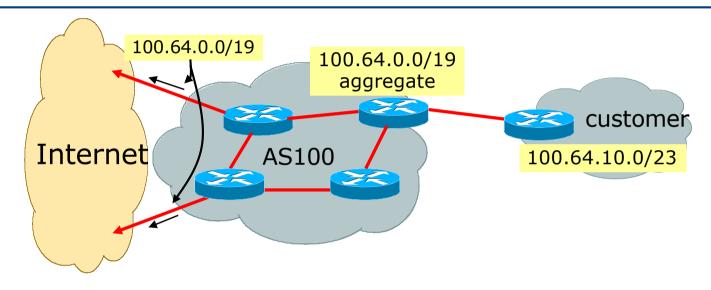

- Customer has /23 network assigned from AS100's /19 address block
- □ AS100 announced /19 aggregate to the Internet

Aggregation – Good Example

- Customer link goes down
 - Their /23 network becomes unreachable
 - /23 is withdrawn from AS100's IBGP
- 19 aggregate is still being announced
 - No BGP hold down problems
 - No BGP propagation delays
 - No damping by other ISPs -

- →□ Customer link returns
- □ Their /23 network is visible again
 - The /23 is re-injected into AS100's IBGP
- The whole Internet becomes visible immediately
- Customer has Quality of Service perception

Aggregation – Summary

- Good example is what everyone should do!
 - Adds to Internet stability
 - Reduces size of routing table
 - Reduces routing churn
 - Improves Internet QoS for everyone
- Bad example is what too many still do!
 - Why? Lack of knowledge?
 - Laziness?

Separation of IBGP and EBGP

- Many ISPs do not understand the importance of separating IBGP and EBGP
 - IBGP is where all customer prefixes are carried
 - EBGP is used for announcing aggregate to Internet and for Traffic Engineering
- Do NOT do traffic engineering with customer originated IBGP prefixes
 - Leads to instability similar to that mentioned in the earlier bad example
 - Even though aggregate is announced, a flapping subprefix will lead to instability for the customer concerned
- Generate traffic engineering prefixes on the Border Router

The Internet Today (May 2021)

Current IPv4 Internet Routing Table Statistics

BGP Routing Table Entries	857992
Prefixes after maximum aggregation	324830
Unique prefixes in Internet	407487
/24s announced	498733
ASNs in use	71226

- (maximum aggregation is calculated by Origin AS)
- (unique prefixes > max aggregation means that operators are announcing aggregates from their blocks without a covering aggregate)

Efforts to improve aggregation

- The CIDR Report
 - Initiated and operated for many years by Tony Bates
 - Now combined with Geoff Huston's routing analysis
 - www.cidr-report.org
 - (covers both IPv4 and IPv6 BGP tables)
 - Results e-mailed on a weekly basis to most operations lists around the world
 - Lists the top 30 service providers who could do better at aggregating
- RIPE Routing WG aggregation recommendations
 - IPv4: RIPE-399 www.ripe.net/ripe/docs/ripe-399.html
 - IPv6: RIPE-532 www.ripe.net/ripe/docs/ripe-532.html

Efforts to Improve Aggregation The CIDR Report


- Also computes the size of the routing table assuming ISPs performed optimal aggregation
- Website allows searches and computations of aggregation to be made on a per AS basis
 - Flexible and powerful tool to aid ISPs
 - Intended to show how greater efficiency in terms of BGP table size can be obtained without loss of routing and policy information
 - Shows what forms of origin AS aggregation could be performed and the potential benefit of such actions to the total table size
 - Very effectively challenges the traffic engineering excuse

Status Summary

Table History

Date	Prefixes	CIDR Aggregated
04-05-21	880976	472773
05-05-21	880679	473912
06-05-21	881316	473846
07-05-21	880934	474664
08-05-21	881215	474805
09-05-21	881090	475032
10-05-21	881101	475222
11-05-21	881101	475332
	04-05-21 05-05-21 06-05-21 07-05-21 08-05-21 09-05-21 10-05-21	04-05-21 880976 05-05-21 880679 06-05-21 881316 07-05-21 880934 08-05-21 881215 09-05-21 881090 10-05-21 881101

Plot: BGP Table Size

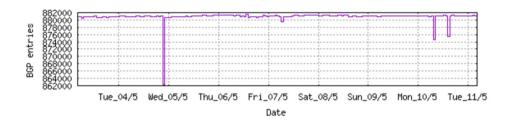


AS Summary

Number of ASes in routing system
Number of ASes announcing only one
prefix
Largest number of prefixes announced
by an AS
AS8151: Uninet S.A. de C.V., MX
Largest address span announced by an
AS (/32s)
AS8003: GRS-DOD, US

Plot: AS count

Plot: Average announcements per origin AS Report: ASes ordered by originating address span Report: ASes ordered by transit address span

Report: Autonomous System number-to-name mapping (from Registry WHOIS data)

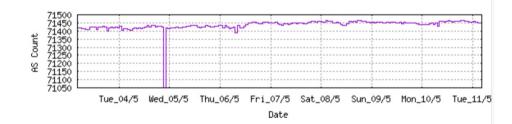

```
Rank AS Type Originate Addr Space (pfx) Transit Addr space (pfx) Description
72 AS6389 ORG+TRN Originate: 10075904 /8.74 Transit: 60160 /16.12 BELLSOUTH-NET-BLK, US
```

Aggregation Suggestions

Filter: <u>Aggregates</u>, <u>Specifics</u>

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank AS	AS Name	Current W	Wthdw Aggte A	Annce Redctn	8	
59 <u>AS6389</u>	BELLSOUTH-NET-BLK, US	902	722 17	197 705	78.16%	
						Long term deaggregator
Prefix	AS Path	Aggregation Sug	ggestion			Long term deaggregator
12.81.120.0/24	4608 7575 6461 7018 6389					BellSouth in the US
12.130.209.0/24	4608 7575 2914 7018 6389 63	389 6389 6389				Deliboutif in the 05
65.4.0.0/14	4608 7575 6461 7018 6389					
65.4.0.0/19	4608 7575 2914 7018 6389					
65.5.1.0/24	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.12.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.64.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.88.0/21	4608 7575 6461 7018 6389 -					
65.5.118.0/23	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.140.0/23	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.141.0/24	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.160.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.164.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.172.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.200.0/21	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.228.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.232.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.236.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.240.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.244.0/22	4608 7575 2914 7018 6389					
65.5.248.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.5.252.0/22	4608 7575 6461 7018 6389 -	Withdrawn - matching aggr	regate 65.4.0.0	0/14 4608 757	75 6461 7018 638	9
65.6.192.0/21	4608 7575 2914 7018 6389 +	Announce - aggregate of 6	55.6.192.0/22	(4608 7575 29	914 7018 6389) a:	nd 65.6.196.0/22 (4608 7575 2914 7018 6389)
65.6.192.0/22	4608 7575 2914 7018 6389 -	Withdrawn - aggregated wi	ith 65.6.196.0/	/22 (4608 757	75 2914 7018 638	9)
65.6.196.0/22	4608 7575 2914 7018 6389 -	Withdrawn - aggregated wi	ith 65.6.192.0/	/22 (4608 757	75 2914 7018 638	9)
65.7.64.0/18	4608 7575 2914 7018 6389					
65.7.116.0/22	4608 4826 3257 7018 6389 +	Announce - aggregate of 6	55.7.116.0/23	(4608 4826 32	257 7018 6389) a:	nd 65.7.118.0/23 (4608 4826 3257 7018 6389)
65.7.116.0/24	4608 4826 3257 7018 6389 -	Withdrawn - aggregated wi	ith 65.7.117.0/	/24 (4608 482	26 3257 7018 638	9)
65.7.117.0/24	4608 4826 3257 7018 6389 -	Withdrawn - aggregated wi	ith 65.7.116.0/	/24 (4608 482	26 3257 7018 638	9)
65.7.118.0/24	4608 4826 3257 7018 6389 -	Withdrawn - aggregated wi	ith 65.7.119.0/	/24 (4608 482	26 3257 7018 638	9)
65.7.119.0/24	4608 4826 3257 7018 6389 -	Withdrawn - aggregated wi	ith 65.7.118.0/	/24 (4608 482	26 3257 7018 638	9)
65.7.120.0/22	4608 4826 3257 7018 6389 +	Announce - aggregate of 6	55.7.120.0/23	(4608 4826 32	257 7018 6389) a:	nd 65.7.122.0/23 (4608 4826 3257 7018 6389)
65.7.120.0/24	4608 4826 3257 7018 6389 -	Withdrawn - aggregated wi	ith 65.7.121.0/	/24 (4608 482	26 3257 7018 638	9)

```
Rank AS Type Originate Addr Space (pfx) Transit Addr space (pfx) Description
212 AS18566 ORG+TRN Originate: 2836480 /10.56 Transit: 6912 /19.25 MEGAPATH5-, US
```

Aggregation Suggestions

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

```
Rank AS
                  AS Name
                                                               Current Wthdw Aggte Annce Redctn
 27 AS18566
                  MEGAPATH5-, US
                                                                  1990
                                                                        1646
                                                                                 119
                                                                                        463 1527 76.73%
 Prefix
                      AS Path
                                                          Aggregation Suggestion
 64.6.160.0/23
                      4608 4826 3257 18566
                      4608 4826 3257 18566 + Announce - aggregate of 64.6.164.0/23 (4608 4826 3257 18566) and 64.6.166.0/23 (4608 4826 3257 18566)
 64.6.164.0/22
 64.6.164.0/23
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.6.166.0/23 (4608 4826 3257 18566)
 64.6.166.0/24
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.6.167.0/24 (4608 4826 3257 18566)
                                                                                                                   Long term deaggregator -
 64.6.167.0/24
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.6.166.0/24 (4608 4826 3257 18566)
 64.50.206.0/23
                      4608 4826 3257 18566
                                                                                                                   Megapath in the US
 64.51.126.0/23
                     4608 4826 3257 18566
 64.81.0.0/16
                      4608 4826 3356 18566
 64.81.4.0/24
                      4608 4826 3257 18566
                      4608 4826 3257 18566 + Announce - aggregate of 64.81.16.0/21 (4608 4826 3257 18566) and 64.81.24.0/21 (4608 4826 3257 18566)
 64.81.16.0/20
 64.81.16.0/22
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.20.0/22 (4608 4826 3257 18566)
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.16.0/22 (4608 4826 3257 18566)
 64.81.20.0/22
 64.81.22.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.20.0/22 4608 4826 3257 18566
 64.81.24.0/22
                     4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.28.0/22 (4608 4826 3257 18566)
 64.81.28.0/22
                     4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.24.0/22 (4608 4826 3257 18566)
 64.81.32.0/19
                     4608 4826 3257 18566 + Announce - aggregate of 64.81.32.0/20 (4608 4826 3257 18566) and 64.81.48.0/20 (4608 4826 3257 18566)
 64.81.32.0/20
                      4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.48.0/20 (4608 4826 3257 18566)
                      4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.32.0/24
 64.81.33.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.34.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.35.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.36.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.37.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.38.0/24
                      4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.39.0/24
                      4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
                      4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
 64.81.40.0/24
 64.81.44.0/24
                      4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.32.0/20 4608 4826 3257 18566
                     4608 4826 3257 18566 - Withdrawn - aggregated with 64.81.32.0/20 (4608 4826 3257 18566)
 64.81.48.0/20
 64.81.48.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.48.0/20 4608 4826 3257 18566
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.48.0/20 4608 4826 3257 18566
 64.81.50.0/24
 64.81.53.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.48.0/20 4608 4826 3257 18566
 64.81.54.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.48.0/20 4608 4826 3257 18566
 64.81.57.0/24
                     4608 4826 3257 18566 - Withdrawn - matching aggregate 64.81.48.0/20 4608 4826 3257 18566
```

```
Rank AS Type Originate Addr Space (pfx) Transit Addr space (pfx) Description

143 AS7545 ORG+TRN Originate: 5090560 /9.72 Transit: 2886144 /10.54 TPG-INTERNET-AP TPG Telecom Limited, AU
```

Aggregation Suggestions

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

```
Rank AS
                   AS Name
                                                                Current Wthdw Aggte Annce Redctn
                   TPG-INTERNET-AP TPG Telecom Limited, AU
   5 AS7545
                                                                   5758
                                                                         5170
                                                                                  139
                                                                                          727
                                                                                              5031 87.37%
 Prefix
                      AS Path
                                                           Aggregation Suggestion
14.2.0.0/19
                      4608 4739 7545
14.2.32.0/19
                      4608 7575 7545
14.2.32.0/21
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.40.0/21
                                           - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
                      4608 7575 7545
14.2.48.0/21
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
                                           - Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.56.0/21
                      4608 7575 7545
14.2.64.0/18
                      4608 4739 7545
                                           + Announce - aggregate of 14.2.64.0/19 (4608 4739 7545) and 14.2.96.0/19 (4608 4739 7545)
14.2.64.0/19
                      4608 4739 7545
                                           - Withdrawn - aggregated with 14.2.96.0/19 (4608 4739 7545)
14.2.96.0/19
                      4608 4739 7545
                                           - Withdrawn - aggregated with 14.2.64.0/19 (4608 4739 7545)
14.2.128.0/18
                      4608 7575 7545
14.2.192.0/20
                      4608 4739 7545
14.200.0.0/14
                      4608 7575 7545
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.0.0/24
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.1.0/24
                      4608 7575 7545
 14.200.2.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
 14.200.3.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.4.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.5.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.6.0/24
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.7.0/24
                      4608 7575 7545
14.200.8.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.9.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.10.0/24
14.200.11.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.12.0/24
14.200.13.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.14.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.15.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.16.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.17.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.18.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.19.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.20.0/24
                      4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
                                           - Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
 14.200.21.0/24
                      4608 7575 7545
```

Long term deaggregator – TPG in Australia

```
Rank AS
                    Originate Addr Space (pfx) Transit Addr space (pfx) Description
     AS12479
                   ORG+TRN Originate: 14214912 /8.24 Transit: 273664 /13.94 UNI2-AS, ES
```

Aggregation Suggestions

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank AS 3 <u>AS12479</u>	AS Name UNI2-AS, ES		Current Wthdw 6587 6079		
Prefix	AS Path	Aggre	gation Suggest	ion	
1.178.224.0/19	4608 4826 551		gacion suggest	1011	
37.11.0.0/16	4608 4826 551				
37.11.0.0/22		. 12479 - Withdrawn - matchin	g aggregate 37	.11.0.0/16 46	08 4826 5511 12479
37.11.4.0/22		12479 - Withdrawn - matchin			
37.11.8.0/22		12479 - Withdrawn - matchin			
37.11.12.0/22		12479 - Withdrawn - matchin			
37.11.16.0/22	4608 4826 551	. 12479 - Withdrawn - matchin	ig aggregate 37	.11.0.0/16 46	08 4826 5511 12479
37.11.20.0/22	4608 4826 551	. 12479 - Withdrawn - matchin	g aggregate 37	.11.0.0/16 46	08 4826 5511 12479
37.11.24.0/22	4608 4826 551	. 12479 - Withdrawn - matchin	g aggregate 37	.11.0.0/16 46	08 4826 5511 12479
37.11.28.0/22	4608 4826 551	. 12479 - Withdrawn - matchin	g aggregate 37	.11.0.0/16 46	08 4826 5511 12479
37.11.32.0/22		. 12479 - Withdrawn - matchin			
37.11.36.0/22		. 12479 - Withdrawn - matchin			
37.11.40.0/22		. 12479 - Withdrawn - matchin			
37.11.44.0/22		. 12479 - Withdrawn - matchin			
37.11.48.0/22		. 12479 - Withdrawn - matchin			
37.11.52.0/22		. 12479 - Withdrawn - matchin			
37.11.56.0/22		. 12479 - Withdrawn - matchin			
37.11.60.0/22		. 12479 - Withdrawn - matchin			
37.11.64.0/22		. 12479 - Withdrawn - matchin			
37.11.68.0/22		. 12479 - Withdrawn - matchin			
37.11.72.0/22		. 12479 - Withdrawn - matchin			
37.11.76.0/22		. 12479 - Withdrawn - matchin			
37.11.80.0/22		. 12479 - Withdrawn - matchin			
37.11.84.0/22		. 12479 - Withdrawn - matchin			
37.11.88.0/22		12479 - Withdrawn - matchin			
37.11.92.0/22		. 12479 - Withdrawn - matchin			
37.11.96.0/22		. 12479 - Withdrawn - matchin			
37.11.100.0/22		. 12479 - Withdrawn - matchin			
37.11.104.0/22		12479 - Withdrawn - matchin			
37.11.108.0/22		. 12479 - Withdrawn - matchin			
37.11.112.0/22		12479 - Withdrawn - matchin			
37.11.116.0/22		12479 - Withdrawn - matchin			
37.11.120.0/22	4608 4826 551	. 12479 - Withdrawn - matchin	ig aggregate 37	.11.0.0/16 46	08 4826 5511 12479

Long term deaggregator – Orange in Spain

```
Rank AS Type Originate Addr Space (pfx) Transit Addr space (pfx) Description

1 AS8003 ORIGIN Originate: 178348544 /4.59 Transit: 0 /0.00 GRS-DOD, US
```

Aggregation Suggestions

Filter: Aggregates, Specifics

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank AS	AS Name	Current Wthdw Aggte Annce Redctn %
55 <u>AS8003</u>	GRS-DOD, US	754 725 3 32 722 95.76%
Prefix	AS Path	Aggregation Suggestion
6.132.0.0/14	4777 6939 8003	
6.136.0.0/13	4777 6939 8003	
6.144.0.0/12	4777 6939 8003	
6.160.0.0/11	4777 6939 8003	
6.192.0.0/10	4777 6939 8003	
6.243.234.0/24	4777 6939 8003	- Withdrawn - matching aggregate 6.192.0.0/10 4777 6939 8003
7.0.0.0/8	4777 6939 8003	
7.0.0.0/22	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.0.0.0/23	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.0.0.0/24	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.6.2.0/24	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.7.7.0/24	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.8.0.0/19	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.8.0.0/22	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.8.0.0/23	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.8.0.0/24	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
7.64.3.0/24	4777 6939 8003	- Withdrawn - matching aggregate 7.0.0.0/8 4777 6939 8003
11.0.0.0/8	4777 6939 8003	
11.0.0.0/13	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.0.0.0/22	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.0.0.0/24	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.1.1.0/24	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.4.0.0/15	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.4.24.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.4.144.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.5.40.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.5.88.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.5.120.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.5.240.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.5.248.0/21	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.6.148.0/23	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.7.220.0/23	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.8.0.0/15	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003
11.11.11.0/24	4777 6939 8003	- Withdrawn - matching aggregate 11.0.0.0/8 4777 6939 8003

New announcements by US DoD as from late January 2021 – but why the deaggregation??

Importance of Aggregation

- Size of routing table
 - Router Memory is not so much of a problem as it was in the 1990s
 - Routers routinely carry over 2 million prefixes
- □ Convergence of the Routing System
 - This is a problem
 - Bigger table takes longer for CPU to process
 - BGP updates take longer to deal with
 - BGP Instability Report tracks routing system update activity
 - bgpupdates.potaroo.net/instability/bgpupd.html

The BGP Instability Report

The BGP Instability Report is updated daily. This report was generated on 10 May 2021 06:41 (UTC+1000)

50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes	UPDs/Prefix	AS NAME
1	132839	485394	4.07%	293	1656.63	POWERLINE-AS-AP POWER LINE DATACENTER, HK
2	8151	208606	1.75%	8563	24.36	Uninet S.A. de C.V., MX
3	21859	189141	1.59%	844	224.10	ZNET, US
4	19429	188165	1.58%	1220	154.23	ETB - Colombia, CO
5	12696	185302	1.55%	20	9265.10	AXA-TECH Paris, FR
6	16509	156176	1.31%	5217	29.94	AMAZON-02, US
7	40065	118462	0.99%	567	208.93	CNSERVERS, US
8	33548	112983	0.95%	18	6276.83	UNWIRED-NOC, US
9	9829	88042	0.74%	1893	46.51	BSNL-NIB National Internet Backbone, IN
10	47331	83064	0.70%	7831	10.61	TTNET, TR
11	58424	76538	0.64%	49	1562.00	XINWEITELECOM-KH # 3BEo, Sangkat Beoun Prolit, Khan 7Makara, Phnom Penh., KH
12	13904	67563	0.57%	175	386.07	COSLINK, US
13	5972	60645	0.51%	2237	27.11 DNIC-ASBLK-05800-06055, US	
14	7713	58881	0.49%	3529	9 16.68 TELKOMNET-AS-AP PT Telekomunikasi Indonesia, ID	
15	58224	56960	0.48%	1598	8 35.64 TCI, IR	
16	45899	53751	0.45%	3383	15.89	VNPT-AS-VN VNPT Corp, VN
17	9009	53322	0.45%	2443	21.83	M247, GB
18	36935	52393	0.44%	528		Vodafone-, EG
19	47730	47255		2		JEANDELESTRE, FR
20	12479	45458		6694		UNI2-AS, ES
21	6147	44993		1132		Telefonica del Peru S.A.A., PE
22	3551	41015		246		Universidad Tecnologica de Panama, PA
23	9808	40697		8226		CMNET-GD Guangdong Mobile Communication Co.Ltd., CN
24	39891	39521	0.33%	3266	12.10	ALJAWWALSTC-AS, SA
25	4755	37815	0.32%	2136	17.70	TATACOMM-AS TATA Communications formerly VSNL is Leading ISP, IN

50 Most active Prefixes for the past 14 days

PREFIX	UPDs	%	Origin AS AS NAME
118.127.80.0/22	37291	0.30%	18117 HARBOURMSP-AU-AP NTT Communications ICT Solutions, AU
95.173.129.0/24	36252	0.29%	8291 RSNET-AS RSNET, RU
85.208.229.0/24	36145	0.29%	209348 NPISP, IQ
216.238.254.0/23	35589	0.29%	13904 COSLINK, US
67.211.53.0/24	33713	0.27%	26405 HDCS, US
64.68.236.0/22	29685	0.24%	13904 COSLINK, US
168.243.93.0/24	29351	0.24%	262179 Telenetwork de El Salvador, SV
196.46.27.0/24	24987	0.20%	37207 NNPC, NG 37248 PHASE3TEL, NG
64.192.5.0/24	24223		33548 UNWIRED-NOC, US
45.148.160.0/24	23635	0.19%	47730 JEANDELESTRE, FR
45.148.160.0/22	23620		47730 JEANDELESTRE, FR
128.14.218.0/23	23113	0.19%	21859 ZNET, US
128.14.246.0/24	23111	0.19%	21859 ZNET, US
107.155.14.0/24	23110		21859 ZNET, US
107.150.113.0/24	23108	0.19%	21859 ZNET, US
23.251.106.0/23	22932		21859 ZNET, US
23.248.179.0/24	22930	0.19%	21859 ZNET, US
23.236.116.0/24	22836	0.18%	21859 ZNET, US
209.177.95.0/24	22617		21859 ZNET, US
64.192.1.0/24	20347		33548 UNWIRED-NOC, US
64.192.0.0/24	20284		33548 UNWIRED-NOC, US
64.192.2.0/24	18900	0.15%	33548 UNWIRED-NOC, US
64.192.3.0/24	18550		33548 UNWIRED-NOC, US
88.135.160.0/19	17598		50188 KOLNET, PL
82.163.205.0/24	17164		25160 VORBOSS_AS, GB
213.5.248.0/21	17080		50188 KOLNET, PL
200.52.142.0/24	15323	0.12%	16531 TOPNET SA de CV, MX
99.194.200.0/22	14626	0.12%	22561 CENTURYLINK-LEGACY-LIGHTCORE, US
199.192.180.0/22	14590	0.12%	20101 MICHWAVE, US
	118.127.80.0/22 95.173.129.0/24 85.208.229.0/24 216.238.254.0/23 67.211.53.0/24 64.68.236.0/22 168.243.93.0/24 196.46.27.0/24 64.192.5.0/24 45.148.160.0/22 128.14.218.0/23 128.14.246.0/24 107.155.14.0/24 107.150.113.0/24 23.251.106.0/23 23.248.179.0/24 24.192.1.0/24 64.192.1.0/24 64.192.2.0/24 64.192.3.0/24 88.135.160.0/19 82.163.205.0/24 200.52.142.0/24 99.194.200.0/22	118.127.80.0/22 37291 95.173.129.0/24 36252 85.208.229.0/24 36145 216.238.254.0/23 35589 67.211.53.0/24 33713 64.68.236.0/22 29685 168.243.93.0/24 29351 196.46.27.0/24 24987 64.192.5.0/24 24223 45.148.160.0/24 23635 45.148.160.0/22 23620 128.14.218.0/23 23113 128.14.246.0/24 23110 107.155.14.0/24 23100 107.150.113.0/24 23108 23.251.106.0/23 22932 23.248.179.0/24 22930 23.236.116.0/24 22836 209.177.95.0/24 22617 64.192.1.0/24 20347 64.192.3.0/24 18900 64.192.3.0/24 18550 88.135.160.0/19 17598 82.163.205.0/24 17164 213.5.248.0/21 17080 200.52.142.0/24 15323 99.194.200.0/22 14626	118.127.80.0/22 37291 0.30% 95.173.129.0/24 36252 0.29% 85.208.229.0/24 36145 0.29% 216.238.254.0/23 35589 0.29% 67.211.53.0/24 33713 0.27% 64.68.236.0/22 29685 0.24% 168.243.93.0/24 29351 0.20% 64.192.5.0/24 24223 0.20% 64.192.5.0/24 24223 0.20% 45.148.160.0/24 23635 0.19% 128.14.218.0/23 23113 0.19% 128.14.246.0/24 23111 0.19% 107.155.14.0/24 23108 0.19% 107.150.113.0/24 23108 0.19% 23.251.106.0/23 22932 0.19% 23.248.179.0/24 22930 0.19% 23.236.116.0/24 22836 0.18% 209.177.95.0/24 22617 0.18% 64.192.1.0/24 20347 0.16% 64.192.3.0/24 18900 0.15% 64.192.3.0/24 18550 0.15% </td

The BGP IPv6 Instability Report

This report is updated daily. The current report was generated on 11 May 2021 01:21 (UTC+1000)

50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes I	JPDs/Prefix	AS NAME
1	18403	925592	15.34%	878	1054.21	FPT-AS-AP The Corporation for Financing & Promoting Technology, VN
2	<u>270590</u>	302790	5.02%	33	9175.45	M Andrade dos Santos, BR
3	20473	215176	3.57%	2606	82.57	AS-CHOOPA, US
4	<u>131429</u>	168391	2.79%	403	417.84	MOBIFONE-AS-VN MOBIFONE Corporation, VN
5	<u>267560</u>	137252	2.27%	7	19607.43	PC CONNECT TELECOMUNICACOES LTDA, BR
6	<u>27951</u>	131285	2.18%	50	2625.70	Media Commerce Partners S.A, CO
7	<u>28573</u>	117432	1.95%	1241	94.63	CLARO S.A., BR
8	140485	104448	1.73%	454	230.06	CHINATELECOM-ZHEJIANG-HANGZHOU-5GC-NETWORK CHINATELECOM ZHEJIANG province HANGZHOU 5GC network, CN
9	14840	96252	1.59%	20	4812.60	BR.Digital Provider, BR
10	24429	95641	1.58%	9	10626.78	TAOBAO Zhejiang Taobao Network Co.,Ltd, CN
11	140313	91555	1.52%	304	301.17	CHINATELECOM-GUANGDONG-ZHAOQING-5G-NETWORK CHINATELECOM Guangdong province Zhaoqing 5G network, CN
12	140486	79902	1.32%	453	176.38	CHINATELECOM-ZHEJIANG-JINHUA-5GC-NETWORK CHINATELECOM ZHEJIANG province JINHUA 5GC network, CN
13	140345	71651	1.19%	262	273.48	CHINATELECOM-YUNNAN-SHENGJI-5G-NETWORK CHINATELECOM Yunnan province Shengji 5G network, CN
14	205908	71546	1.19%	6	11924.33	PETERCXY-NETWORKS PeterCxy Networks, DE
15	<u>5588</u>	65862	1.09%	16	4116.38	GTSCE GTS Central Europe / Antel Germany, CZ
16	<u>9829</u>	52634	0.87%	416	126.52	BSNL-NIB National Internet Backbone, IN
17	<u>136440</u>	50249	0.83%	1	50249.00	SASPL-AS-AP Sungard Availability Services (India) Private Limited, IN
18	12208	50197	0.83%	18	2788.72	TRUVISTA, US
19	<u>60626</u>	47015	0.78%	4	11753.75	LEASEWEBCDN, NL
20	<u>52861</u>	44895	0.74%	7	6413.57	SN Internet Navegantes Ltda ME, BR
21	38082	39431	0.65%	8	4928.88	IIT-TIG-AS-AP True International Gateway Co., Ltd., TH
22	<u>31514</u>	34053	0.56%	2	17026.50	INF-NET-AS, RU
23	<u>266390</u>	33949	0.56%	1	33949.00	Tajo Tecnologia Ltda, BR

50 Most active Prefixes for the past 14 days

RANK	PREFIX	UPDs	%	Origin AS AS NAME
1	2400:dc40::/32	50249	0.77%	136440 SASPL-AS-AP Sungard Availability Services (India) Private Limited, IN
2	2404:2280:147::/48	45431	0.69%	24429 TAOBAO Zhejiang Taobao Network Co.,Ltd, CN
3	2405:4000:800:8::/64	39396	0.60%	38082 IIT-TIG-AS-AP True International Gateway Co., Ltd., TH
4	2404:2280:106::/48	38682	0.59%	24429 TAOBAO Zhejiang Taobao Network Co.,Ltd, CN
5	2804:371c:8000::/48	33949	0.52%	266390 Tajo Tecnologia Ltda, BR
6	2402:53c0:2000::/36	28339	0.43%	137144 PASSLIR-AS Passit Media And Communication Pvt. Ltd., IN
7	2804:448c::/32	26546	0.41%	267638 Wind Telecomunicacao do Brasil Ltda - ME, BR
8	2a0e:b107:2f0::/44	25417	0.39%	205908 PETERCXY-NETWORKS PeterCxy Networks, DE
9	2a06:e881:2502::/48	24143	0.37%	205908 PETERCXY-NETWORKS PeterCxy Networks, DE
10	2801:17:4800::/48	23673	0.36%	27951 Media Commerce Partners S.A, CO
11	2a00:9d20:5353::/48	23548	0.36%	60626 LEASEWEBCDN, NL
12	2a00:9d20:53::/48	23461	0.36%	60626 LEASEWEBCDN, NL
13	2801:174:3::/48	23218	0.35%	27951 Media Commerce Partners S.A, CO
14	2801:1b6::/44	23215	0.35%	27951 Media Commerce Partners S.A, CO
15	2801:172:2::/48	23121	0.35%	27951 Media Commerce Partners S.A, CO
16	2804:4348::/40	22898	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
17	2804:4348:100::/40	22896	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
18	2804:4348:200::/40	22872	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
19	2804:4348:500::/40	22861	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
20	2804:4348:300::/40	22857	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
21	2804:4348:400::/40	22854	0.35%	267560 PC CONNECT TELECOMUNICACOES LTDA, BR
22	2a0e:b107:2f0::/48	21968	0.34%	205908 PETERCXY-NETWORKS PeterCxy Networks, DE
23	2620:13a:f001::/48	21836	0.33%	33110 UHSC-MBC, CA
24	2804:4ea8::/32	18999	0.29%	268275 GOOD TELECOM PROVEDOR DE INTERNET LTDA, BR
25	2a00:5240::/32	18953		16331 TELE-ENTRE-FI-AS, FI
26	2804:20fc:1b00::/48	17891	0.27%	264525 Coelho Tecnologia, BR
27	2801:186::/44	17842	0.27%	27951 Media Commerce Partners S.A, CO
28	2a05:3181:ffff::/48	17027	0.26%	31514 INF-NET-AS, RU
29	2a05:3181::/32	17026	0.26%	31514 INF-NET-AS, RU
30	2001:4190::/32	16497	0.25%	5588 GTSCE GTS Central Europe / Antel Germany, CZ

Receiving Prefixes

Receiving Prefixes

- There are three scenarios for receiving prefixes from other ASNs
 - Customer talking BGP
 - Peer talking BGP
 - Upstream/Transit talking BGP
- Each has different filtering requirements and need to be considered separately

- ISPs should only accept prefixes which have been assigned or allocated to their downstream customer
- If ISP has assigned address space to its customer, then the customer IS entitled to announce it back to his ISP
- If the ISP has NOT assigned address space to its customer, then:
 - Check in the five RIR databases to see if this address space really has been assigned to the customer
 - The tool: whois -h jwhois.apnic.net x.x.x.0/24
 - (jwhois is "joint whois" and queries all RIR databases)

Example use of whois to check if customer is entitled to announce address space:
inetnum - means it is an

```
address delegation to an entity
$ whois -h jwhois.apric.net 202.12.29.0
                202.12.29.0 - 202.12.29.255
inetnum:
                APNIC-SERVICES-AU
netname:
descr:
                Asia Pacific Network Information Centre
descr:
                Regional Internet Registry for the Asia-Pacific Region
descr:
                6 Cordelia Street
descr:
                South Brisbane
                                                        Portable - means its an
geoloc:
                27.4731138 153.0141194
                                                        assignment to the customer, the
country:
                AIC1-AP
                                                        customer can announce it to you
admin-c:
tech-c:
                AIC1-AP
mnt-by:
                APNIC-HM
mnt-irt:
                IRT-APNIC-IS-AP
                ASSIGNED PORTABLE
status:
changed:
                hm-changed@apnic.net 20170327
                hm-changed@apnic.net 20170331
changed:
source:
                APNIC
```

Example use of whois to check if customer is entitled to announce address space:
inetnum - means it is an

```
$ whois -h jwhois.apric.net 194.15.141.0
inetnum:
                194.15.141.0 - 194.15.141.255
                TNETTECH
netname:
country:
                SE
                ORG-ITAS2-RIPE
orq:
admin-c:
                KEL5-RIPE
tech-c:
                KEL5-RIPE
status:
                ASSIGNED PI
mnt-by:
                RIPE-NCC-END-MNT
mnt-by:
                KURTIS-PP-MNT
mnt-routes:
                KURTIS-PP-MNT
mnt-domains:
                KURTIS-PP-MNT
created:
                2003-12-04T09:33:09Z
last-modified: 2016-04-14T08:21:55Z
source:
                RIPE
sponsoring-org: ORG-NIE1-RIPE
```

inetnum – means it is an address delegation to an entity

Assigned PI – means its an assignment to the customer, the customer can announce it to you

Example use of whois to check if customer is entitled to announce address space:
inetnum - means it is an

```
address delegation to an entity
$ whois -h jwhois april . net 193.128.0.0/22
                193.128.0.0 - 193.128.6.255
inetnum:
                UK-PIPEX-19931014
netname:
country:
                ORG-UA24-RIPE
org:
admin-c:
                WERT1-RIPE
tech-c:
                UPHM1-RIPE
                ALLOCATED PA
status:
remarks:
                Please sand abuse notification to abuse@uk.uu.net
                RIPE-NCC-HM-MNT
mnt-by:
mnt-by:
                AS1849-MNT
mnt-routes:
                AS1849-MNT
                                           ALLOCATED - means that this is
mnt-routes:
                WCOM-EMEA-RICE-MNT
                                           Provider Aggregatable address
mnt-irt:
                IRT-MCI-GB
                                           space and can only be announced
created:
                2018-07-30T09:42:04Z
                                           by the ISP holding the allocation
last-modified:
                2018-07-30T09:42:04Z
                                           (in this case Verizon UK)
                RIPE # Filtered
source:
```

Receiving Prefixes from customer: Cisco IOS

For Example:

- Downstream has 100.69.0.0/20 block
- Should only announce this to upstreams
- Upstreams should only accept this from them
- Configuration on upstream

```
router bgp 100
address-family ipv4
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list customer in
neighbor 100.67.10.1 prefix-list default out
neighbor 100.67.10.1 activate
!
ip prefix-list customer permit 100.69.0.0/20
!
ip prefix-list default permit 0.0.0.0/0
```

Receiving Prefixes: From Peers

- A peer is an ISP with whom you agree to exchange prefixes you originate into the Internet routing table
 - Prefixes you accept from a peer are only those they have indicated they will announce
 - Prefixes you announce to your peer are only those you have indicated you will announce

Receiving Prefixes: From Peers

- Agreeing what each will announce to the other:
 - Exchange of e-mail documentation as part of the peering agreement, and then ongoing updates

OR

- Use of the Internet Routing Registry and configuration tools such as:
 - IRRToolSet:

https://github.com/irrtoolset/irrtoolset

□ bgpq3:

https://github.com/snar/bgpq3

Receiving Prefixes from peer: Cisco IOS

- For Example:
 - Peer has 220.50.0.0/16, 61.237.64.0/18 and 81.250.128.0/17 address blocks
- Configuration on local router

```
router bgp 100
address-family ipv4
neighbor 100.67.10.1 remote-as 101
neighbor 100.67.10.1 prefix-list my-peer in
neighbor 100.67.10.1 prefix-list my-prefix out
neighbor 100.67.10.1 activate
!
ip prefix-list my-peer permit 220.50.0.0/16
ip prefix-list my-peer permit 61.237.64.0/18
ip prefix-list my-peer permit 81.250.128.0/17
ip prefix-list my-peer deny 0.0.0.0/0 le 32
!
ip prefix-list my-prefix permit 100.67.16.0/20
```

- Upstream/Transit Provider is an ISP who you pay to give you transit to the WHOLE Internet
- Receiving prefixes from them is not desirable unless really necessary
 - Traffic Engineering see BGP Multihoming presentations
- Ask upstream/transit provider to either:
 - originate a default-route

OR

announce one prefix you can use as default

Downstream Router Configuration

```
router bgp 100
address-family ipv4
network 100.66.0.0 mask 255.255.224.0
neighbor 100.65.7.1 remote-as 101
neighbor 100.65.7.1 prefix-list infilter in
neighbor 100.65.7.1 prefix-list outfilter out
neighbor 100.65.7.1 activate
!
ip prefix-list infilter permit 0.0.0.0/0
!
ip prefix-list outfilter permit 100.66.0.0/19
```

Upstream Router Configuration

```
router bgp 101
address-family ipv4
neighbor 100.65.7.2 remote-as 100
neighbor 100.65.7.2 default-originate
neighbor 100.65.7.2 prefix-list cust-in in
neighbor 100.65.7.2 prefix-list cust-out out
neighbor 100.65.7.2 activate
!
ip prefix-list cust-in permit 100.66.0.0/19
!
ip prefix-list cust-out permit 0.0.0.0/0
```

- If it is necessary to receive prefixes from any provider, care is required.
 - Don't accept default (unless you need it)
 - Don't accept your own prefixes
- Special use prefixes for IPv4 and IPv6:
 - http://www.rfc-editor.org/rfc/rfc6890.txt
- □ For IPv4:
 - Don't accept prefixes longer than /24 (?)
 - /24 was the historical class C
- □ For IPv6:
 - Don't accept prefixes longer than /48 (?)
 - □ /48 is the design minimum delegated to a site

- Check Team Cymru's list of "bogons"
 - http://www.team-cymru.com/bogon-reference.html
- □ For IPv4 also consult:
 - https://www.rfc-editor.org/rfc/rfc6441.txt (BCP171)
- □ For IPv6 also consult:
 - http://www.space.net/~gert/RIPE/ipv6-filters.html
- Bogon Route Server:
 - https://www.team-cymru.com/bogon-reference-bgp.html
 - Supplies a BGP feed (IPv4 and/or IPv6) of address blocks which should not appear in the BGP table

Receiving IPv4 Prefixes

```
router bgp 100
 network 101.10.0.0 mask 255.255.224.0
neighbor 100.65.7.1 remote-as 101
neighbor 100.65.7.1 prefix-list in-filter in
ip prefix-list in-filter deny 0.0.0.0/0
                                                     ! Default
ip prefix-list in-filter deny 0.0.0.0/8 le 32
                                                     ! RFC1122 local host
ip prefix-list in-filter deny 10.0.0.0/8 le 32
                                                     ! RFC1918
ip prefix-list in-filter deny 100.64.0.0/10 le 32
                                                     ! RFC6598 shared address
                                                     ! Local prefix
ip prefix-list in-filter deny 101.10.0.0/19 le 32
ip prefix-list in-filter deny 127.0.0.0/8 le 32
                                                     ! Loopback
ip prefix-list in-filter deny 169.254.0.0/16 le 32
                                                     ! Auto-config
ip prefix-list in-filter deny 172.16.0.0/12 le 32
                                                     ! RFC1918
ip prefix-list in-filter deny 192.0.0.0/24 le 32
                                                     ! RFC6598 IETF protocol
ip prefix-list in-filter deny 192.0.2.0/24 le 32
                                                     ! TEST1
ip prefix-list in-filter deny 192.168.0.0/16 le 32
                                                     ! RFC1918
ip prefix-list in-filter deny 198.18.0.0/15 le 32
                                                     ! Benchmarking
ip prefix-list in-filter deny 198.51.100.0/24 le 32 ! TEST2
ip prefix-list in-filter deny 203.0.113.0/24 le 32
                                                     ! TEST3
ip prefix-list in-filter deny 224.0.0.0/3 le 32
                                                     ! Multicast & Experimental
ip prefix-list in-filter deny 0.0.0.0/0 ge 25
                                                     ! Prefixes >/24
ip prefix-list in-filter permit 0.0.0.0/0 le 32
```

Receiving IPv6 Prefixes

```
router bgp 100
network 2020:3030::/32
 neighbor 2020:3030::1 remote-as 101
 neighbor 2020:3030::1 prefix-list v6in-filter in
ipv6 prefix-list v6in-filter permit 64:ff9b::/96
                                                           ! RFC6052 v4v6trans
ipv6 prefix-list v6in-filter deny 2001::/23 le 128
                                                           ! RFC2928 IETF prot
ipv6 prefix-list v6in-filter deny 2001:2::/48 le 128
                                                           ! Benchmarking
ipv6 prefix-list v6in-filter deny 2001:10::/28 le 128
                                                           ! ORCHID
ipv6 prefix-list v6in-filter deny 2001:db8::/32 le 128
                                                           ! Documentation
ipv6 prefix-list v6in-filter deny 2002::/16 le 128
                                                           ! Deny all 6to4
ipv6 prefix-list v6in-filter deny 2020:3030::/32 le 128
                                                           ! Local Prefix
ipv6 prefix-list v6in-filter deny 3ffe::/16 le 128
                                                           ! Formerly 6bone
ipv6 prefix-list v6in-filter permit 2000::/3 le 48
                                                           ! Global Unicast
ipv6 prefix-list v6in-filter deny ::/0 le 128
```

Note: These filters block Teredo (serious security risk) and 6to4 (deprecated by RFC7526)

Receiving Prefixes

- Paying attention to prefixes received from customers, peers and transit providers assists with:
 - The integrity of the local network
 - The integrity of the Internet
- Responsibility of all ISPs to be good Internet citizens

Prefixes into IBGP

Injecting prefixes into IBGP

- Use IBGP to carry customer prefixes
 - Don't use IGP
- □ Point static route to customer interface
- Use BGP network statement
- As long as static route exists (interface active), prefix will be in BGP

Router Configuration: network statement

■ Example:

```
interface loopback 0
  ip address 100.64.3.1 255.255.255.255
!
interface Serial 5/0
  ip unnumbered loopback 0
  ip verify unicast reverse-path
!
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
  address-family ipv4
  network 100.71.10.0 mask 255.255.252.0
!
```

Injecting prefixes into IBGP

- Interface flap will result in prefix withdraw and reannounce
 - USE "ip route . . . permanent"
- Many ISPs redistribute static routes into BGP rather than using the network statement
 - Only do this if you understand why

Router Configuration: redistribute static

■ Example:

```
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
  address-family ipv4
  redistribute static route-map static-to-bgp
<snip>
!
route-map static-to-bgp permit 10
  match ip address prefix-list ISP-block
  set origin igp
  set community 100:1000
<snip>
!
ip prefix-list ISP-block permit 100.71.10.0/22 le 30
```

Injecting prefixes into IBGP

- Route-map static-to-bgp can be used for many things:
 - Setting communities and other attributes
 - Setting origin code to IGP, etc
- Be careful with prefix-lists and route-maps
 - Absence of either/both means all statically routed prefixes go into IBGP

Summary

- Best Practices Covered:
 - When to use BGP
 - When to use ISIS/OSPF
 - Aggregation
 - Receiving Prefixes
 - Prefixes into BGP

Interconnection Best Practices

PeeringDB and the Internet Routing Registry

Interconnection Best Practices

- Types of Peering
- Using the PeeringDB and IXPDB
- Using the Internet Routing Registry

Types of Peering (1)

- Private Peering
 - Where two network operators agree to interconnect their networks, and exchange their respective routes, for the purpose of ensuring their customers can reach each other directly over the peering link
- Settlement Free Peering
 - No traffic charges
 - The most common form of peering
- Paid Peering
 - Where two operators agree to exchange traffic charges for a peering relationship

Types of Peering (2)

- Bi-lateral Peering
 - Very similar to Private Peering, but usually takes place at a public peering point (IXP)
- Multilateral Peering
 - Takes place at Internet Exchange Points, where operators all peer with each other via a Route Server
- Mandatory Multilateral Peering
 - Where operators are forced to peer with each other as condition of IXP membership
 - Strongly discouraged: Has no record of success

Types of Peering (3)

Open Peering

- Where an ISP publicly states that they will peer with all parties who approach them for peering
- Commonly found at IXPs where ISP participates via the Route Server

Selective Peering

- Where an ISP's peering policy depends on the nature of the operator who requests peering with them
- At IXPs, operator will not peer with RS but will only peer bilaterally

Restrictive Peering


 Where an ISP decides who its peering partners are, and is generally not approachable to considering peering opportunities

Types of Peering (4)

- The Peering Database documents ISPs peering policies
 - https://www.peeringdb.com
- All operators of ASNs should register in the PeeringDB
 - All operators who are considering peering or are peering must be in the PeeringDB to enhance their peering opportunities
- Participation in peering fora is encouraged too
 - Global Peering Forum (GPF) (for North American peering)
 - Regional Peering Fora (European, Middle Eastern, Asian, Caribbean, Latin American)
 - Many countries now have their own Peering Fora

Types of Peering (5)

- The IXPDB documents IXPs and their participants around the world
 - https://ixpdb.euro-ix.net/en/
- All Internet Exchange Point operators should register their IXP in the database
 - IXPs using IXP Manager will have this happen as part of the IXP Manager set up
 - Provides the LAN IP addresses of each member to facilitate automation

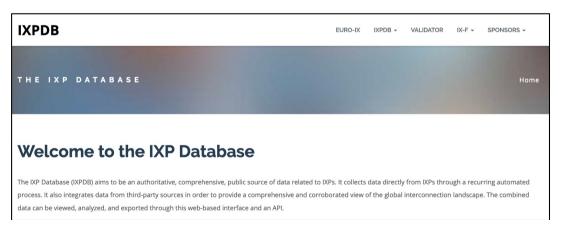

Search here for a network, IX, or facility.

Advanced Search

HKIX

Organization	Hong Kong Internet eXchange Limited
Long Name	Hong Kong Internet Exchange
City	Hong Kong
Country	нк
Continental Region	Asia Pacific
Media Type	Ethernet
Protocols Supported	
Notes ?	

Contact Information

Company Website	https://www.hkix.net/
Traffic Stats Website	https://www.hkix.net/hkix/stat/aggt/hkix-aggregate.html
Technical Email	noc@hkix.net
Technical Phone	+85239439900
Policy Email	info@hkix.net
Policy Phone	+85239438800

LAN

MTU	1500
DOT1Q	0
IPv6	2001:7fa:0:1::/64
IPv4	123.255.88.0/21

Local Facilities

Filter

Facility ▼	Country	City
CUHK	Hong Kong	Hong Kong
MEGA Two (iAdvantage Hong Kong)	Hong Kong	Hong Kong
MEGA-i (iAdvantage Hong Kong)	Hong Kong	Hong Kong

Peers at this Exchange Point

Filter

Peer Name ▼ ASN	IPv4 IPv6	Speed
ASIV	IPVO	Policy
ASGCNET HKIX Peering LAN	123,255,91,53	10G
24167	2001:7fa:0:1::ca28:a135	Open
Asia Pacific Telecom HKIX Peering	123.255.91.86	10G
LAN	2001:7fa:0:1::ca28:a156	Open
17709	2001.710.0.10020.0100	Орол
ASLINE HKIX Peering LAN	123.255.92.13	10G
18013	2001:7fa:0:1::ca28:a20d	Open
AT&T AP - AS2687 HKIX Peering	123.255.91.46	10G
LAN	2001:7fa:0:1::ca28:a12e	Selective
2687		
Automattic HKIX Peering LAN	123.255.90.71	10G
2635	2001:7fa:0:1::ca28:a047	Open
Badoo Ltd HKIX Peering LAN	123.255.90.220	2G
12678	None	Open
Baidu HKIX Peering LAN	123.255.90.131	10G
55967	2001:7fa:0:1::ca28:a083	Open
Baidu HKIX Peering LAN	123.255.91.61	10G
55967	2001:7fa:0:1::ca28:a13d	Open
Bayan Telecommunications	123.255.91.45	3G
Inc. HKIX Peering LAN	2001:7fa:0:1::ca28:a12d	Open
6648		
BGP Network Limited HKIX	123.255.91.177	100G
Peering LAN	2001:7fa:0:1::ca28:a1b1	Open
64050		
BIGHUB-ISP HKIX Peering LAN	123.255.90.207	1G
137989	2001:7fa:0:1::ca28:a0cf	Open
BIGHUB-ISP HKIX Peering LAN	123.255.91.98	10G

Filter



Advanced Search

Amazon.com Diamond Sponsor

Organization	<u>Amazon.com</u>
Also Known As	Amazon Web Services
Company Website	http://www.amazon.com
Primary ASN	16509
IRR as-set/route-set ?	AS-AMAZON
Route Server URL	
Looking Glass URL	
Network Type	Enterprise
IPv4 Prefixes 😯	5000
IPv6 Prefixes 9	2000
Traffic Levels	Not Disclosed
Traffic Ratios	Balanced
Geographic Scope	Global
Protocols Supported	
Last Updated	2019-12-29T14:56:38Z
Notes ②	If you have a connectivity issue to Amazon then please visit: • IPv4: http://ec2-reachability.amazonaws.com/ • IPv6: http://ipv6.ec2-reachability.amazonaws.com/ And include detail on prefixes you think you have a problem with if you contact our Ops alias. This will reduce time with troubleshooting. The following Amazon US locations and associated IX's carry routes/traffic specific only to the services with infrastructure in that metro. For example, Jacksonville is CloudFront only, whereas Ashburn is CloudFront, EC2, S3, etc.) • Seattle • Palo Alto • San Jose • Los Angeles • Dallas

Exchange ▼ ASN	IPv4 IPv6	Speed RS Peer
<u>AMS-IX</u>	80.249.210.100	400G
16509	2001:7f8:1::a501:6509:1	0
AMS-IX	80.249.210.217	400G
16509	2001:7f8:1::a501:6509:2	0
AMS-IX Chicago	206.108.115.36	100G
16509	2001:504:38:1:0:a501:65 09:1	0
AMS-IX Hong Kong	103.247.139.10	100G
16509	2001:df0:296::a501:6509:	0
AMS-IX India	223.31.200.29	10G
16509	2001:e48:44:100b:0:a501 :6509:2	0
AMS-IX India	223.31.200.30	10G
16509	2001:e48:44:100b:0:a501 :6509:1	0
BBIX Osaka	218.100.9.24	40G
16509	2001:de8:c:2:0:1:6509:1	0
BBIX Tokyo	218.100.6.52	200G
16509	2001:de8:c::1:6509:1	0
BBIX Tokyo	218.100.6.207	200G
16509	2001:de8:c::1:6509:2	0
BCIX BCIX Peering LAN	193.178.185.95	200G
16509	2001:7f8:19:1::407d:1	0
BIX.BG Main	193.169.198.87	100G
16509	2001:7f8:58::407d:0:1	0
RNIX	194 53 172 122	100G
Private Peering Facilities	Filter	

Country

Canada Toronto

City

Public Peering Exchange Points

Facility ~

151 Front Street West Toronto

ASN



Advanced Search

Telia Carrier

Organization	<u>Telia Group</u>	
Also Known As	TeliaSonera, Telia, TSIC	
Company Website	http://www.teliacarrier.com/	
Primary ASN	1299	
IRR as-set/route-set 🔞	RIPE::AS-TELIANET RIPE::AS-TELIANET-V6	
Route Server URL		
Looking Glass URL	https://lg.telia.net/	
Network Type	NSP	
IPv4 Prefixes ?	426000	
IPv6 Prefixes ②	40000	
Traffic Levels	1 Tbps+	
Traffic Ratios	Balanced	
Geographic Scope	Global	
Protocols Supported		
Last Updated	2020-02-05T11:43:25Z	
Notes ?	IPv4 + IPv6 Prefixes above would be actuals, not proposed max- prefix values.	
	AS1299 is matching RPKI validation state and reject invalid prefixes from peers and customers. Our looking-glass marks validation state for all prefixes. Please review your registered ROAs to reduce number of invalid prefixes.	
	All trouble ticket requests or support related emails should be sent to carrier-csc@teliacompany.com.	

Peering Policy Information

Peering Policy	https://www.teliacarrier.com/dam/jcr:d1e83942-3db1-4334- a5f8- 431578633d26/Telia Carrier Global Peering Policy.pdf
General Policy	Restrictive

Public Peering Exchange Points

Filter

Exchange ▼	IPv4	Speed
	12.1	
ASN	IPv6	RS Peer

No filter matches.
You may filter by **Exchange**, **ASN** or **Speed.**

Private Peering Facilities

Filter

Facility ▼ ASN	Country City	
365 Data Centers Buffalo (BU1)	United States of America	
1299	Buffalo	
365 Data Centers Detroit (DT1)	United States of America	
1299	Southfield	
365 Data Centers Nashville (NA1)	United States of America	
1299	Nashville	
365 Data Centers Tampa (TA1)	United States of America	
1299	Tampa	
3U Rechenzentrum Berlin	Germany	
1299	Berlin	
Altus IT	Croatia	
1299	Zagreb	
Borovaya 57	Russia	
1299	St. Petersburg	
CE Colo Prague	Czechia	
1299	Prague	
CINECA - DC NaMeX	Italy	
1299	Roma	
COD BM-18	Russia	
1299	St.Petersburg	
Caldera21	Italy	
1299	Milan	
CarrierColo Berlin Luetzow (I/P/B/ site B)	Germany	
1299	Berlin	
Cologix MTL3	Canada	
1299	Montreal Screenshot	

Internet Routing Registry

- Many major transit providers and several content providers pay attention to what is contained in the Internet Routing Registry
 - There are many IRRs operating, the most commonly used being those hosted by the Regional Internet Registries, RADB, and some transit providers
- Best practice for any AS holder is to document their routing policy in the IRR
 - A route-object is the absolute minimum requirement

Internet Routing Registry

- IRR objects can be created via the database webinterfaces or submitted via email
- Policy language used to be known as RPSL
- □ Problems:
 - IRR contains a lot of outdated information
 - Network operators not following best practices
- Some network operators now using RPKI and ROAs to securely indicate the origin AS of their routes
 - Takes priority over IRR entries
 - RPKI and ROAs covered later in the presentation

Internet Routing Registry

- Which IRR database to use?
 - Members of a Regional Internet Registry are recommended to use their RIR's Internet Routing Registry instance
 - Usually managed via the RIR's member portal giving easy access for creation and update of objects
 - Provided as part of the RIR's services to its members
 - Operators who do not belong to any RIR generally use:
 - Their upstream transit provider's Routing Registry (if provided)
 - The RADB
 - https://www.radb.net
 - Note: Placing objects in the RADB requires an annual subscription fee

Route Object: Purpose

- Documents which Autonomous System number is originating the route listed
- Required by many major transit providers
 - They build their customer and peer filter based on the routeobjects listed in the IRR
 - Referring to at least the 5 RIR routing registries and the RADB
 - Some operators run their own Routing Registry
 - May require their customers to place a Route Object there (if not using the 5 RIR or RADB versions of the IRR)

Route Object: Examples

route: 202.144.128.0/20 descr: DRUKNET-BLOCK-A1

country: BT

notify: ioc@bt.bt

mnt-by: MAINT-BT-DRUKNET

origin: AS18024

last-modified: 2018-09-18T09:37:40Z

source: APNIC

route6: 2405:D000::/32

descr: DRUKNET-IPV6-BLOCK

origin: AS17660

notify: netops@bt.bt

mnt-by: MAINT-BT-DRUKNET

last-modified: 2010-07-21T03:46:02Z

source: APNIC

This declares that AS18024 is the origin of 202.144.128.0/20

This declares that AS17660 is the origin of 2405:D000::/32

AS Object: Purpose

- Documents peering policy with other Autonomous Systems
 - Lists network information
 - Lists contact information
 - Lists routes announced to neighbouring autonomous systems
 - Lists routes accepted from neighbouring autonomous systems
- Some operators pay close attention to what is contained in the AS Object
 - Some configure their border router BGP policy based on what is listed in the AS Object

AS Object: Example

AS17660 aut-num: as-name: DRUKNET-AS DrukNet ISP, Bhutan Telecom, Thimphu descr: country: BT ORG-BTL2-AP org: action pref=100; import: from AS6461 accept ANY to AS6461 export: announce AS-DRUKNET-TRANSIT from AS2914 import: action pref=150; accept ANY export: to AS2914 announce AS-DRUKNET-TRANSIT <snip> import: from AS135666 action pref=250; accept AS135666 export: announce {0.0.0.0/0} AS-DRUKNET-TRANSIT to AS135666

admin-c: DNO1-AP tech-c: DNO1-AP

mnt-by: APNIC-HM

mnt-lower: MAINT-BT-DRUKNET mnt-routes: MAINT-BT-DRUKNET

last-modified: 2019-06-09T22:40:10Z

source: APNIC

Examples of inbound and outbound policies – RPSL

AS-Set: Purpose

- The AS-Set is used by network operators to group AS numbers they provide transit for in an easier to manage form
 - Convenient for more complicated policy declarations
 - Used mostly by network operators who build their EBGP filters from their IRR entries
 - Commonly used at Internet Exchange Points to handle large numbers of peers

AS-Set: Example

as-set: AS-DRUKNET-TRANSIT

descr: DrukNet transit networks

members: AS17660
members: AS38004
members: AS132232
members: AS134715
members: AS135666
members: AS137925

members: AS59219
members: AS18024

members: AS18025 members: AS137994 admin-c: DNO1-AP

tech-c: DNO1-AP

notify: netops@bt.bt

mnt-by: MAINT-BT-DRUKNET

last-modified: 2019-01-15T08:51:21Z

source: APNIC

Lists all the autonomous systems within the AS-DRUKNET-TRANSIT group

Summary

PeeringDB

- An industry Best Practice so that:
 - Network operators can promote the interconnects they participate in and attract more peering partners

□ IXPDB

- An industry Best Practice so that:
 - Internet Exchange Points can show their participants and help make the interconnect more attractive for potential participants

□ IRR

- An industry Best Practice:
 - So that network operators can document which autonomous system is originating their prefixes
 - Used by network operators to filter prefixes received from their customers and 83
 peers

Route Origin Authorisation

Steps to securing the Routing System

Route Origin Authorisation

- Essential first step to secure the global routing system
- Covered in detail in separate presentation slide deck:
 - http://www.bgp4all.com.au/pfs/_media/workshops/02-rpki.pdf

Configuration Tips

Of passwords, tricks and templates

IBGP and IGPs Reminder!

- Make sure loopback is configured on router
 - IBGP between loopbacks, NOT real interfaces
- Make sure IGP carries loopback IPv4 /32 and IPv6 /128 address
- Consider the DMZ nets:
 - Use unnumbered interfaces?
 - Use next-hop-self on IBGP neighbours
 - Or carry the DMZ IPv4 /30s and IPv6 /127s in the IBGP
 - Basically, keep the DMZ nets out of the IGP!

IBGP: Next-hop-self

- BGP speaker announces external network to IBGP peers using router's local address (loopback) as next-hop
- Used by many ISPs on edge routers
 - Preferable to carrying DMZ point-to-point link addresses in the IGP
 - Reduces size of IGP to just core infrastructure
 - Alternative to using unnumbered interfaces
 - Helps scale network
 - Many ISPs consider this "best practice"

Limiting AS Path Length

- Some BGP implementations have problems with long AS_PATHS
 - Memory corruption
 - Memory fragmentation
- Even using AS_PATH prepends, it is not normal to see more than 20 ASNs in a typical AS_PATH in the Internet Routing Table today
 - The Internet is around 5 ASes deep on average
 - Largest AS_PATH is usually 16-20 ASNs

neighbor x.x.x.x maxas-limit 20

Limiting AS Path Length

- Some announcements have ridiculous lengths of AS-paths
 - This example is an error in one IPv6 implementation

This example shows 100 prepends (for no obvious reason)

```
*>i193.105.15.0

2516 3257 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 504
```

If your implementation supports it, consider limiting the maximum AS-path length you will accept

BGP Maximum Prefix Tracking

- Allow configuration of the maximum number of prefixes a BGP router will receive from a peer
- □ Two level control:
 - Warning threshold: log warning message
 - Maximum: tear down the BGP peering, manual intervention required to restart neighbor <x.x.x.x> maximum-prefix <max> [restart N] [<threshold>] [warning-only]
- restart is an optional keyword which will restart the BGP session N minutes after being torn down
- threshold is an optional parameter between 1 to 100
 - Specify the percentage of <max> that will cause a warning message to be generated. Default is 75%.
- warning-only is an optional keyword which allows log messages to be generated but peering session will not be torn down

Private-AS – Application


 A network operator with endsites multihomed on their backbone (RFC2270)

or

 A corporate network with several regions but connections to the Internet only in the core

or

Within a BGP Confederation

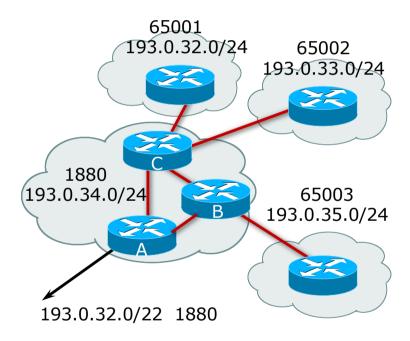


Private-AS – Removal

- Private ASNs MUST be removed from all prefixes announced to the public Internet
 - Include configuration to remove private ASNs in the EBGP template
- As with RFC1918 address space, private ASNs are intended for internal use
 - They must not be leaked to or used on the public Internet
- □ Cisco IOS

neighbor x.x.x.x remove-private-AS

BGP TTL "hack"

- □ Implement RFC5082 on BGP peerings
 - (Generalised TTL Security Mechanism)
 - Neighbour sets TTL to 255
 - Local router expects TTL of incoming BGP packets to be 254
 - No one apart from directly attached devices can send BGP packets which arrive with TTL of 254, so any possible attack by a remote miscreant is dropped due to TTL mismatch

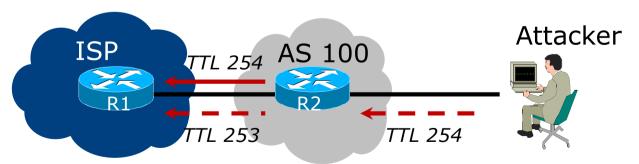

BGP TTL "hack"

- TTL Hack:
 - Both neighbours must agree to use the feature
 - TTL check is much easier to perform than MD5
 - (Called BTSH BGP TTL Security Hack)
- Provides "security" for BGP sessions
 - In addition to packet filters of course
 - MD5 should still be used for messages which slip through the TTL hack
 - See https://www.nanog.org/meetings/nanog27/presentations/meyer.pdf for more details

BGP TTL "hack"

Configuration example:

```
neighbor 100.121.0.2 ttl-security hops 1
```

■ BGP neighbour status:

```
Router# sh ip bgp neigh 100.121.0.2
...
Mininum incoming TTL 254, Outgoing TTL 255
Local host: 100.121.0.1, Local port: 41103
Foreign host: 100.121.0.2, Foreign port: 179
```

- The neighbour must set the same configuration
 - If they don't, the BGP session will not come up

Templates

- Good practice to configure templates for everything
 - Vendor defaults tend not to be optimal or even very useful for ISPs
 - ISPs create their own defaults by using configuration templates
- EBGP and IBGP examples follow
 - Also see Team Cymru's BGP templates
 - http://www.team-cymru.com/community-services.html

IBGP Template Example

- IBGP between loopbacks!
- Next-hop-self
 - Keep DMZ and external point-to-point out of IGP
- Always send communities in IBGP
 - Otherwise BGP policy accidents will happen
 - (Default on some vendor implementations, optional on others)
- □ Hardwire BGP to version 4
 - Yes, this is being paranoid!
 - Prevents accidental configuration of BGP version 3 which is still supported in some implementations

IBGP Template Example continued

- Use passwords on IBGP session
 - Not being paranoid, VERY necessary
 - It's a secret shared between you and your peer
 - If arriving packets don't have the correct MD5 hash, they are ignored
 - Helps defeat miscreants who wish to attack BGP sessions
- Powerful preventative tool, especially when combined with filters and the TTL "hack"

EBGP Template Example

- BGP damping
 - Do **NOT** use it unless you understand the impact
 - Do NOT use the vendor defaults without thinking
- Cisco's Soft Reconfiguration
 - Do NOT use unless troubleshooting it will consume considerable amounts of extra memory for BGP
- Remove private ASes from announcements
 - Common omission today
- Use extensive filters, with "backup"
 - Use AS-path filters to backup prefix filters
 - Keep policy language for implementing policy, rather than basic filtering

EBGP Template Example continued

- Use password agreed between you and peer on EBGP session
- Use maximum-prefix tracking
 - Router will warn you if there are sudden increases in BGP table size, bringing down EBGP if desired
- Limit maximum as-path length inbound
- Log changes of neighbour state
 - ...and monitor those logs!
- Make BGP admin distance higher than that of any IGP
 - Otherwise, prefixes heard from outside your network could override your IGP!!

Mutually Agreed Norms for Routing Security

Industry Best Practices to ensure Security of the Routing System



Routing Security

Implement the recommendations in https://www.manrs.org



- 1. Prevent propagation of incorrect routing information
 - > Filter BGP peers, in & out!
- 2. Prevent traffic with spoofed source addresses
 - > BCP38 Unicast Reverse Path Forwarding
- 3. Facilitate communication between network operators
 - NOC to NOC Communication
 - > Up-to-date details in Route and AS Objects, and PeeringDB
- 4. Facilitate validation of routing information
 - Route Origin Authorisation using RPKI

MANRS 1)

- Filtering prefixes inbound and outbound
 - RFC8212 requires all EBGP implementations to reject prefixes received and announced in the absence of any policy
- Advice: Never set up an EBGP session without inbound and outbound prefix filters
 - If full table required, block at least the bogons (see earlier)

MANRS 2)

- □ Implementing BCP 38
 - Unicast Reverse Path Forwarding
 - (Deny outbound traffic from customers which has spoofed source addresses)
- Advice: implement uRPF on all single-homed customer facing interfaces
 - Cheaper (CPU & RAM) than implementing packet filters

MANRS 3)

- Facilitate NOC to NOC communication
 - Know the direct NOC contacts for your customer Network Operators, your peer Network Operators, and your upstream Network Operators
 - This is not calling their "customer support line"
 - Make sure NOC contact info is part of any service contract
 - Up to date info in Route and AS Objects
 - Up to date AS info in PeeringDB
- Advice: NOC contact info for all connected Autonomous Networks is known to your NOC

MANRS 4)

- Facilitate validation of Routing Information
 - RPKI and Route Origin Authorisation (ROA)
 - All routes originated need to be signed to indicate that your AS is authorised to originate these routes
 - Helps secure the global routing system
- □ Advice: Sign ROAs for all originated routes using RPKI
 - And make sure all customer originated routes are also signed
 - Validate received routes from all peers
 - High priority for validated routes
 - Discard invalid routes
 - Low priority for unsigned routes

MANRS summary

- If your organisation supports and implements all 4 techniques in your network
 - Then join MANRS
 - https://www.manrs.org/join/



- MANRS for Operators
- MANRS for IXPs
- MANRS for CDN & Cloud Providers

Summary

- Use configuration templates
- Standardise the configuration
- Be aware of standard "tricks" to avoid compromise of the BGP session
- Anything to make your life easier, network less prone to errors, network more likely to scale
- Implement the four fundamentals of MANRS
- It's all about scaling if your network won't scale, then it won't be successful

BGP Best Current Practices

ISP Workshops