

IPv6 Deployment Planning

ITU/APNIC/MOIC IPv6
Workshop
19th – 21st June 2017
Thimphu



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)

Acknowledgements

- ❑ This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- ❑ Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- ❑ Bug fixes and improvements are welcomed
 - Please email *workshop (at) bgp4all.com*

Philip Smith

Introduction

- Presentation introduces the high level planning considerations which any network operator needs to be aware of prior to deploying IPv6
- Content applicable for:
 - Business decision makers
 - Network managers
 - Network engineers
 - Will also require implementation detail



Agenda

1. Goals
2. Network Assessment
3. Network Optimisation
4. Procuring IPv6 Address Space
5. IPv6 Address plan
6. Deployment
7. Seeking IPv6 Transit
8. Customers

Goals




What do we want to achieve?

Goals

- Ultimate aim is to provide IPv6 to our customers:
 - Customers = end users
 - Customers = content providers
- Strategy depends on network transport:
 - Native IP backbone
 - Dual Stack is the solution
 - MPLS backbone (tunnels)
 - 6PE or 6VPE is the solution
 - The core infrastructure will remain IPv4 only


Native IP Backbone

- Routers are the infrastructure
 - Customer connections connect to the native backbone
 - VPN services provided using GRE, IPSEC, IPinIP etc
 - Providing IPv6 for customers means upgrading the native infrastructure to dual-stack

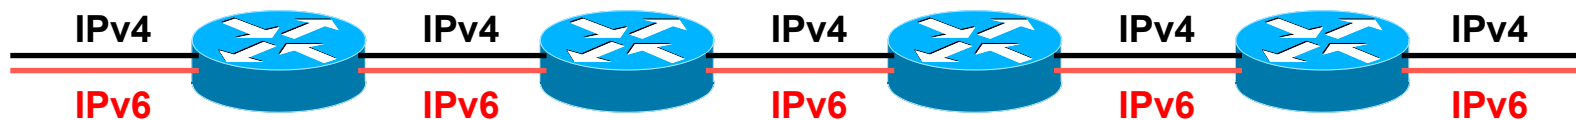

MPLS Backbone

- Routers are the infrastructure
 - Public and Private network access provided within the MPLS cloud
 - The core network does NOT need to be IPv6 aware
 - IPv6 access provided by 6PE or 6VPE
 - Provider Edge routers need dual stack capability

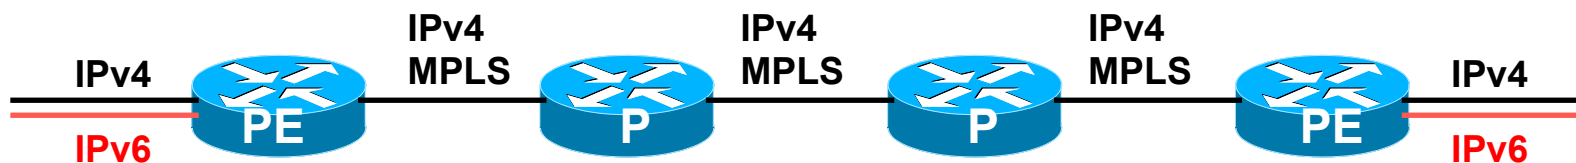

Network Assessment



What can run IPv6 today, and
what needs to be upgraded?

Audit

- First step in any deployment:
 - Review existing network infrastructure
- Primarily routers across backbone
 - Perhaps also critical servers and services (but not essential as initial focus is on routing infrastructure)

Process

- ❑ Analyse each location/PoP
- ❑ Document
 - Router or any other L3 device
 - RAM (installed and used)
 - Non-Volatile Configuration memory
 - Software release versions
 - Most network operators already keep track of this info
 - ❑ If not, RANCID (www.shrubbery.net/rancid/) makes this very easy
- ❑ Sanity check
 - Check existing connectivity
 - Remove unused configuration
 - Shutdown and clean up unused interfaces

Software Issues (1)

- ❑ Does the existing software have IPv6 support?
 - Yes: deployment is straightforward
 - No: investigate cost of upgrade
- ❑ Is a software upgrade available?
 - Yes: is hardware suitably specified?
 - No: hardware replacement
- ❑ Implement software upgrade
 - Budget, purchase & schedule installation

Software Issues (2)

- If existing software supports IPv6:
 - Are deployed software versions consistent across infrastructure?
 - Recommend maximum of two variations (easier troubleshooting, bug tolerance, etc)
- If existing software does not support IPv6:
 - Cost of upgrade to a version which does?
 - Testing for existing feature compatibility:
 - A software image with IPv6 may have “lost” features required for the existing operational network

Hardware Issues

- Can hardware specification be upgraded (eg RAM, NVRAM, etc)?
 - Yes: budget, purchase, installation
 - No: hardware replacement
- Hardware replacement:
 - Assess suitable replacement product
 - Analyse impact on operating network, existing services and customer

Result

- ❑ Once the previous steps are completed, entire network is running IPv6 capable software
- ❑ Deployment of IPv6 can now begin

Network Optimisation



Is the IPv4 network the best it
can be?

Optimisation

- IPv4 networks have been deployed and operational for many years
 - Your network may fall into this category
- Optimisation means:
 - Does the interior routing protocol make sense?
 - Do all routing protocols have the latest best practices implemented?
 - Are the IGP metrics set so that primary and backup paths operate as expected?

Motivation for Optimisation

- ❑ IPv6 deployment (apart from MPLS cores) will be dual stack
 - Which means sitting alongside existing IPv4 configurations
- ❑ Aim is to avoid replicating IPv4 “shortcuts” or “mistakes” when deploying IPv6
 - IPv6 configuration will **replicate** existing IPv4 configuration
- ❑ Improvements in routing protocol BCPs should be deployed and tested for IPv4
 - Take the opportunity to “modernise” the network

Procuring IPv6 address space



Now we need addresses...

Getting IPv6 address space (1)

- **From your Regional Internet Registry**
 - Become a member of your Regional Internet Registry and get your own allocation
 - Membership usually open to all network operators
 - RIR specific details for IPv6 allocations are listed on the individual RIR website
 - Open to all organisations who are operating a network
 - Receive a /32 (or larger if you will have more than 65k /48 assignments)

Getting IPv6 address space (2)

- **From your upstream ISP**
 - Receive a /48 from upstream ISP's IPv6 address block
 - Receive more than one /48 if you have more than 65k subnets
- **If you need to multihome:**
 - Apply for a /48 assignment from your RIR
 - Trying to multihome with provider's /48 will be operationally challenging
 - Provider policies, filters, etc

Address Planning

- IPv6 address space available to each network operator is large compared with IPv4
 - Design a scalable plan
 - Be aware of industry current practices
 - Separation of infrastructure and customer addressing
 - Distribution of address space according to function

Addressing Plans – Infrastructure

- ❑ Network Operators should procure a /32 from their RIR
- ❑ Address block for infrastructure
 - /48 allows 65k subnets in the backbone
- ❑ Address block for router loop-back interfaces
 - Number all loopbacks out of one infrastructure /64
 - /128 per loopback
- ❑ Point-to-point links
 - /64 reserved for each, address as a /127
- ❑ LANs
 - /64 for each LAN

Addressing Plans – Customer

- Customers get **one** /48
 - Unless they have more than 65k subnets in which case they get a second /48 (and so on)
- Industry standard for customer assignments today:
 - /64 for just one LAN
 - /56 for a small network
 - /48 for a large network

Deploying IPv6



Now we put it onto the network

IPv6 Deployment

- ❑ Number all the infrastructure interfaces according to the established addressing plan
 - No customers yet
- ❑ Secure routers and L3 devices for IPv6 access
- ❑ Enable IPv6 internal routing protocols
 - First IGP – care needed not to break IPv4 connectivity
 - iBGP – should replicate IPv4 iBGP
- ❑ Check that operation compares with IPv4 operation
 - Fix any problems – in a dual stack network the protocols must function the same way

Seeking IPv6 Transit



Hello World, I'd like to talk to
you...

Seeking Transit

- Most transit ISPs now offer native IPv6 transit
- Next step is to decide:
 - To give transit business to those who will accept a dual stack connection
 - or**
 - To stay with existing IPv4 provider and seek a tunnelled IPv6 transit from an IPv6 provider

Dual Stack Transit Provider

- Fall into two categories:
 - A. Those who sell you a pipe over which you send packets
 - B. Those who sell you an IPv4 connection and charge extra to carry IPv6
- ISPs in category A are much preferred to those in category B
- Charging extra for native IPv6 is absurd, given that this can be easily bypassed by tunnelling IPv6
 - IPv6 is simply protocol 41 in the range of IP protocol numbers

Dual Stack Transit Provider

□ Advantages:

- Can align BGP policies for IPv4 and IPv6 – perhaps making them more manageable
- Saves money – they charge you for bits on the wire, not their colour

□ Disadvantages:

- Not aware of any

Separate IPv4 and IPv6 transit

- Retain transit from resolute IPv4-only provider
 - You pay for your pipe at whatever \$ per Mbps
- Buy transit from an IPv6 provider
 - You pay for your pipe at whatever \$ per Mbps
- Luck may uncover an IPv6 provider who provides transit for free
 - Getting more and more rare as more ISPs adopt IPv6

Separate IPv4 and IPv6 transit

□ Advantages:

- Not aware of any
- But perhaps situation is unavoidable as long as main IPv4 transit provider can't provide IPv6
- And could be a tool to leverage IPv4 transit provider to deploy IPv6 – or lose business

□ Disadvantages:

- Do the \$\$ numbers add up for this option?
- Separate policies for IPv4 and IPv6 – more to manage

Customer Connections



Network is done, now let's
connect paying customers...

Customer Connections

- Giving connectivity to customers is the biggest challenge facing all ISPs
- Needs special care and attention, even updating of infrastructure and equipment
 - Cable/ADSL
 - Dial
 - Leased lines
 - Wireless Broadband

IPv6 to Broadband Customers

- Method 1: Use existing technology and CPE
 - This is the simplest option – it looks and feels like existing IPv4 service
 - PPPoE + DHCPv6 PD
 - Used by ISPs such as Internode (AU) and XS4ALL (NL)
- Issues:
 - IPv6 CPE are generally more expensive (not the “throwaway” consumer devices yet)
 - Cheaper CPE have no IPv6 yet – need to be replaced/ upgraded

IPv6 to Broadband Customers

- Method 2: use 6rd
 - This is for when Broadband infrastructure cannot be upgraded to support IPv6
 - Used by ISPs such as FREE (FR)
 - Example:
 - 2001:db8:6000::/48 assigned to 6rd
 - Customer gets 192.168.4.5/32 by DHCP for IPv4 link
 - IPv6 addr is 2001:db8:6000:0405::/64 for their LAN (taking last 16 bits of IPv4 address)
 - DHCPv6 PD can be used here too (eg to give /56s to customers)
- Issues:
 - All CPE needs to be replaced/upgraded to support 6rd

IPv6 to Dialup Customers

- Use existing technology:
 - Most dialup access routers are easily upgradable to support IPv6
 - Service looks and feels like the IPv4 service
 - PPPv6 (with DHCPv6 PD perhaps)
 - CPE is usually PC or laptop (and most OSes have supported IPv6 for many years)
 - Service already offered for several years by many ISPs

IPv6 to Fixed Link Customers

- Use existing technology:
 - Most access routers (PE) and Customer routers (CPE) are easily upgradeable or replaceable to include IPv6 support
 - Service looks and feels like existing IPv4 service
- Configuration options:
 - IPv6 unnumbered on point to point links (or address them)
 - Static routes, subnet size according to business size
 - Or use BGP with private or public (multihomed) ASN
 - Whatever is done for IPv4 should be repeated for IPv6
- Fixed link Customers are probably the easiest to roll IPv6 out to
 - Customer deploying IPv6 within their own networks is a separate discussion (rerun of this presentation!)

IPv6 to Customers

- What about addressing? Here is a typical strategy:
 - Mobile Device:
 - /64 = 1 subnet
 - Home/Small Organisation:
 - /56 = 256 subnets
 - Reserve the whole /48
 - Enterprise/Large Organisation:
 - /48 = 65536 subnets

Customer Connections

- What about customer end systems?
 - Is IPv6 available on all their computers and other network connected devices?
 - How to migrate those which aren't?
 - How to educate customer operations staff
 - What about their CPE?
 - What about the link between your edge device and their CPE?
 - What about security?

Conclusion



We are done...!

Conclusion

- ❑ When deploying IPv6 for the first time, a strategy and planning are of paramount importance
- ❑ Presentation has highlighted the steps in the planning and deployment process
 - Variations on the theme are quite likely – there is no single correct way of proceeding

IPv6 Deployment Planning



ITU/APNIC/MOIC IPv6
Workshop
19th – 21st June 2017
Thimphu