

Deploying 32-bit ASNs

ISP Workshops



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)

Last updated 24th June 2021



Acknowledgements

- ❑ This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- ❑ Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- ❑ Bug fixes and improvements are welcomed
 - Please email *workshop (at) bgp4all.com*

Philip Smith

BGP Videos

- NSRC has produced a library of BGP presentations, recorded on video, for the whole community to use
 - <https://learn.nsrc.org/bgp>

The screenshot shows the NSRC (Network Startup Resource Center) website. The navigation bar includes links for Home, About, BGP for All (highlighted), perfSONAR, ScienceDMZ, FedIdM, and Contact Us, along with a search bar. The main content area is divided into three columns:

- BGP for All:** A text-based introduction to BGP, explaining it as the primary routing protocol for the internet and autonomous systems. It also mentions that understanding routing options can create efficiencies for institutions and research/education networks.
- Introduction to Routing:** A list of 15 topics including Internet Routing, Routing Protocols, Introduction to IS-IS (UPDATED), IS-IS Levels, IS-IS Adjacencies, Best Configuration Practices for IS-IS on Cisco IOS, IS-IS Authentication, Default Routes and IPv6, Introduction to OSPF, OSPF Areas, OSPF Adjacencies, Best Configuration Practices for OSPF on Cisco IOS, OSPF Authentication, Default Routes and IPv6, Comparing OSPF and IS-IS, Choosing between OSPF and IS-IS, Migrating from OSPF to IS-IS, Migration Plan, and Finalizing Migration.
- Introduction to BGP:** A list of 6 topics including Introduction to Border Gateway Protocol, Transit and Peering, Autonomous Systems (UPDATED), How BGP works, Supporting Multiple Protocols, IBGP versus EBGP, Setting up EBGP, and Setting up IBGP.

On the right side, there is a video player for "BGP for All" with a play button and a "Watch on YouTube" button. Below the video player, there are sections for "BGP Case Studies" (listing Peering Priorities, Transit Provider Peering at an IXP, Customer Multihomed between two IXP members, Traffic Engineering for an ISP connected to two IXes, Traffic Engineering for an ISP with two interfaces on one IX LAN, and Traffic Engineering and CDNs) and "Communities" (listing RFC 1998 Traffic Engineering, Simplifying Traffic Engineering, How to Apply Communities to Originated Routes, and How to Use Communities for Service Identification).

32-bit ASNs

- Standards documents
 - Description of 32-bit ASNs
 - www.rfc-editor.org/rfc/rfc6793.txt
 - Textual representation
 - www.rfc-editor.org/rfc/rfc5396.txt
 - New extended community
 - www.rfc-editor.org/rfc/rfc5668.txt
- AS 23456 is reserved as interface between 16-bit and 32-bit ASN world



32-bit ASNs – terminology

- 16-bit ASNs
 - Refers to the range 0 to 65535
- 32-bit ASNs
 - Refers to the range 65536 to 4294967295
 - (or the extended range)
- 32-bit ASN pool
 - Refers to the range 0 to 4294967295

Getting a 32-bit ASN

- Nowadays:
 - Standard application process to the RIRs
 - Or via upstream provider
 - Sample RIR policy
 - www.apnic.net/docs/policy/asn-policy.html
- Bootstrap phase from 2007-2010
 - From 1st January 2007
 - 32-bit ASNs were available on request
 - From 1st January 2009
 - 32-bit ASNs were assigned by default
 - 16-bit ASNs were only available on request
 - From 1st January 2010
 - No distinction – ASNs assigned from the 32-bit pool

Representation (1)

- Initially three formats proposed for the 0-4294967295 ASN range :
 - asplain
 - asdot
 - asdot+
- In reality:
 - **Most operators favour traditional plain format**
 - A few prefer dot notation (X.Y):
 - asdot for 65536-4294967295, e.g 2.4
 - asdot+ for 0-4294967295, e.g 0.64513
 - But regular expressions will have to be completely rewritten for asdot and asdot+ !!!

Representation (2)

- Rewriting regular expressions for asdot/asdot+ notation
- Example:
 - `^[0-9]+$` matches any ASN (16-bit and asplain)
 - This and equivalents extensively used in BGP multihoming configurations for traffic engineering
- Equivalent regexp for asdot is:
 - `^([0-9]+)|([0-9]+\.[0-9]+)$`
- Equivalent regexp for asdot+ is:
 - `^[0-9]+\.[0-9]+$`

Changes

- ❑ 32-bit ASNs are backward compatible with 16-bit ASNs
- ❑ **There is no flag day**
- ❑ If you have a 16-bit ASN now you do NOT need to:
 - Throw out your old routers
 - Replace your 16-bit ASN with a 32-bit ASN
- ❑ You do need to be aware that:
 - Your customers will come with 32-bit ASNs
 - ASN 23456 is not a bogon (unless it is in the AS-PATH from a peer)
 - You will need a router supporting 32-bit ASNs to use a 32-bit ASN locally
- ❑ If you have a proper BGP implementation, 32-bit ASNs will be transported silently across your network

How does it work?

- If local router and remote router support configuration of 32-bit ASNs
 - BGP peering is configured as normal using the 32-bit ASN
- If local router and remote router do not support configuration of 32-bit ASNs
 - BGP peering can only use a 16-bit ASN
- If local router only supports 16-bit ASN and remote router/network has a 32-bit ASN
 - Compatibility mode is initiated...

Compatibility Mode (1)

- Local router only supports 16-bit ASN and remote router uses 32-bit ASN
- BGP peering initiated:
 - Remote asks local if 32-bit supported (BGP capability negotiation)
 - When local says “no”, remote then presents AS23456
 - Local needs to be configured to peer with remote using AS23456
- ⇒ Operator of local router has to configure BGP peering with AS23456

Compatibility Mode (2)

- Local router supports only 16-bit ASNs, peering with router supporting 32-bit ASNs
 - Peering set up with AS23456 (transition AS)

```
router bgp 64510
  neighbor 192.168.2.1 remote-as 23456
  neighbor 192.168.2.1 description EBGP with AS 131076
  neighbor 192.168.2.1 prefix-list AS131076-in in
  neighbor 192.168.2.1 prefix-list AS131076-out out
!
```

- Remote router configures normal BGP peering:


```
router bgp 131076
  neighbor 192.168.2.2 remote-as 64510
  neighbor 192.168.2.2 description EBGP with AS 64510
  neighbor 192.168.2.2 prefix-list AS64510-in in
  neighbor 192.168.2.2 prefix-list AS64510-out out
!
```

Compatibility Mode (3)

- BGP peering initiated (cont):
 - BGP session established using AS23456
 - 32-bit ASN included in a new BGP attribute called AS4_PATH
 - (as opposed to AS_PATH for 16-bit ASNs)
- Result:
 - 16-bit ASN world sees 16-bit ASNs and 23456 standing in for each 32-bit ASN
 - 32-bit ASN world sees 16 and 32-bit ASNs

Example:

- ❑ Internet with 32-bit and 16-bit ASNs
- ❑ AS-PATH length maintained

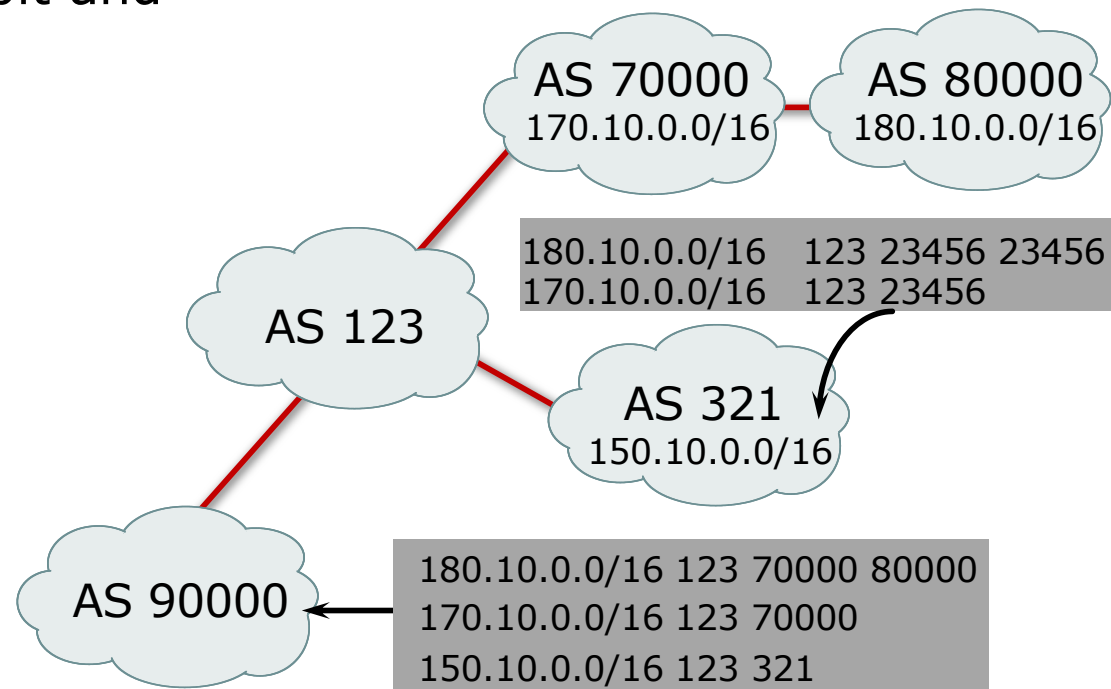

What has changed?

- Two new BGP attributes:
 - AS4_PATH
 - Carries 32-bit ASN path info
 - AS4_AGGREGATOR
 - Carries 32-bit ASN aggregator info
 - Well-behaved BGP implementations will simply pass these along if they don't understand them
- Transition AS
 - AS23456 (AS_TRANS)
 - Reserved for peering between old (16-bit AS only) and new BGP implementations

What do they look like?

- ASPLAIN format for IPv4 prefix originated by AS196613

```
as4-7200#sh ip bgp 145.125.0.0/20
BGP routing table entry for 145.125.0.0/20, version 58734
Paths: (1 available, best #1, table default)
  131072 12654 196613
    204.69.200.25 from 204.69.200.25 (204.69.200.25)
      Origin IGP, localpref 100, valid, internal, best
```


What do they look like?

- ASDOT format for IPv4 prefix originated by AS3.5 (aka AS196613)

```
as4-7200#sh ip bgp 145.125.0.0/20
BGP routing table entry for 145.125.0.0/20, version 58734
Paths: (1 available, best #1, table default)
  2.0 12654 3.5
    204.69.200.25 from 204.69.200.25 (204.69.200.25)
      Origin IGP, localpref 100, valid, internal, best
```

What do they look like?

- 16-bit ASN world view of IPv4 prefix originated by AS196613

```
BGP-view1>sh ip bgp 145.125.0.0/20
BGP routing table entry for 145.125.0.0/20, version 113382
Paths: (1 available, best #1, table Default-IP-Routing-Table)
 23456 12654 23456
   204.69.200.25 from 204.69.200.25 (204.69.200.25)
    Origin IGP, localpref 100, valid, external, best
```

Transition
AS



If 32-bit ASN not supported:

- Inability to distinguish between peer ASes using 32-bit ASNs
 - They will all be represented by AS23456
 - Could be problematic for transit provider's policy
 - Workaround: use BGP communities instead
- Inability to distinguish prefix's origin AS
 - How to tell whether origin is real or fake?
 - The real and fake both represented by AS23456
 - **(There should be a better solution here!)**

If 32-bit ASN not supported:

- Incorrect NetFlow summaries:
 - Prefixes from 32-bit ASNs will all be summarised under AS23456
 - Traffic statistics need to be measured per prefix and aggregated
 - Makes it hard to determine peerability of a neighbouring network
- Unintended filtering by peers and upstreams:
 - Even if IRR supports 32-bit ASNs, not all tools in use can support
 - ISP may not support 32-bit ASNs which are in the IRR – and don't realise that AS23456 is the transition AS

Implementations (May 2011)

- ❑ Cisco IOS-XR 3.4 onwards
- ❑ Cisco IOS-XE 2.3 onwards
- ❑ Cisco IOS 12.0(32)S12, 12.4(24)T, 12.2SRE, 12.2(33)SXI1 onwards
- ❑ Cisco NX-OS 4.0(1) onwards
- ❑ Quagga 0.99.10 (patches for 0.99.6)
- ❑ OpenBGPd 4.2 (patches for 3.9 & 4.0)
- ❑ Juniper JunOSe 4.1.0 & JunOS 9.1 onwards
- ❑ Redback SEOS
- ❑ Force10 FTOS7.7.1 onwards
- ❑ http://as4.cluepon.net/index.php/Software_Support used to have a complete list

Current Status (June 2021)

- The entire 16-bit ASN pool has been assigned to the RIRs
 - Around 41200 16-bit ASNs are visible on the Internet
 - (this number is dropping slightly as 32-bit ASN numbers increase)
- Each RIR has also received a block of 32-bit ASNs
 - Out of 36400 assignments, around 30300 are visible on the Internet (June 2021)
- See www.iana.org/assignments/as-numbers

Optional Materials





Cisco Routers Supporting 4-byte ASNs

- CRS
 - IOS-XR 3.4 onwards
- GSR
 - IOS-XR 3.4 onwards
 - IOS 12.0(32)S12, 12.0(33)S and 12.0(32)SY8 onwards
- ASR1000
 - IOS-XE 2.3 onwards
- Nexus Switches
 - NX-OS 4.0(1) onwards



Cisco Routers Supporting 4-byte ASNs

- Catalyst 6500
 - IOS 12.2(33)SXI1 onwards
- 7600
 - IOS 12.2(33)SRE1 onwards
- 7200 series
 - IOS 12.0(32)S12, 12.0(33)S, 12.2(33)SRE1, 12.4(24)T, 15.0 onwards
- 7301
 - IOS 12.2(33)SRE1, 12.4(24)T, 15.0 onwards



Cisco Routers Supporting 4-byte ASNs

- 3900/2900/1900 series
 - IOS 15.0 onwards
- 3800/2800/1800/800 series
 - IOS 12.4(24)T and IOS 15.0 onwards
- 3745/3725
 - IOS 12.4(24)T
- AS5350/5400
 - IOS 12.4(24)T and IOS 15.0 onwards



Cisco Routers NOT supporting 4-byte ASNs

- Routers which will never support 4-byte ASNs include:
 - 2500 series
 - 2600 series
 - 3600 series
 - AS5300
 - 7304

Deployment Tips



How to deploy 32-bit ASNs in the
backbone network

Deployment Scenarios

- Typical ISP design is thus:
 - ISIS/OSPF for IGP, carrying loopback and point to point link addresses
 - IBGP mesh (full/RR/Confederation) to carry customer and Internet prefixes
- All routers support 4-byte ASNs:
 - Proceed with IBGP design as normal
- Not all routers support 4-byte ASNs:
 - Three viable options

IBGP options


1. Return 4-byte ASN to the RIR and request 2-byte ASN instead
 - Works if RIR is willing to do so
 - Works as long as there are 2-byte ASNs remaining
2. Routers which support 4-byte ASNs run IBGP mesh
 - Routers which do not support 4-byte ASNs either run in private ASN (as a pseudo-customer) or do not run BGP at all
3. The BGP Confederation "hack"

BGP Confederation “hack”

- Useful if only border routers can support 4-byte ASNs
 - Remaining backbone and aggregation routers cannot support 4-byte ASNs
- How?
 - The entire network runs within one private AS
 - The border routers declare to their EBGP neighbours that they are really in 4-byte ASN confederation

Example:

- ❑ Routers X, A and C support 4-byte ASNs
- ❑ Router Y and B do not

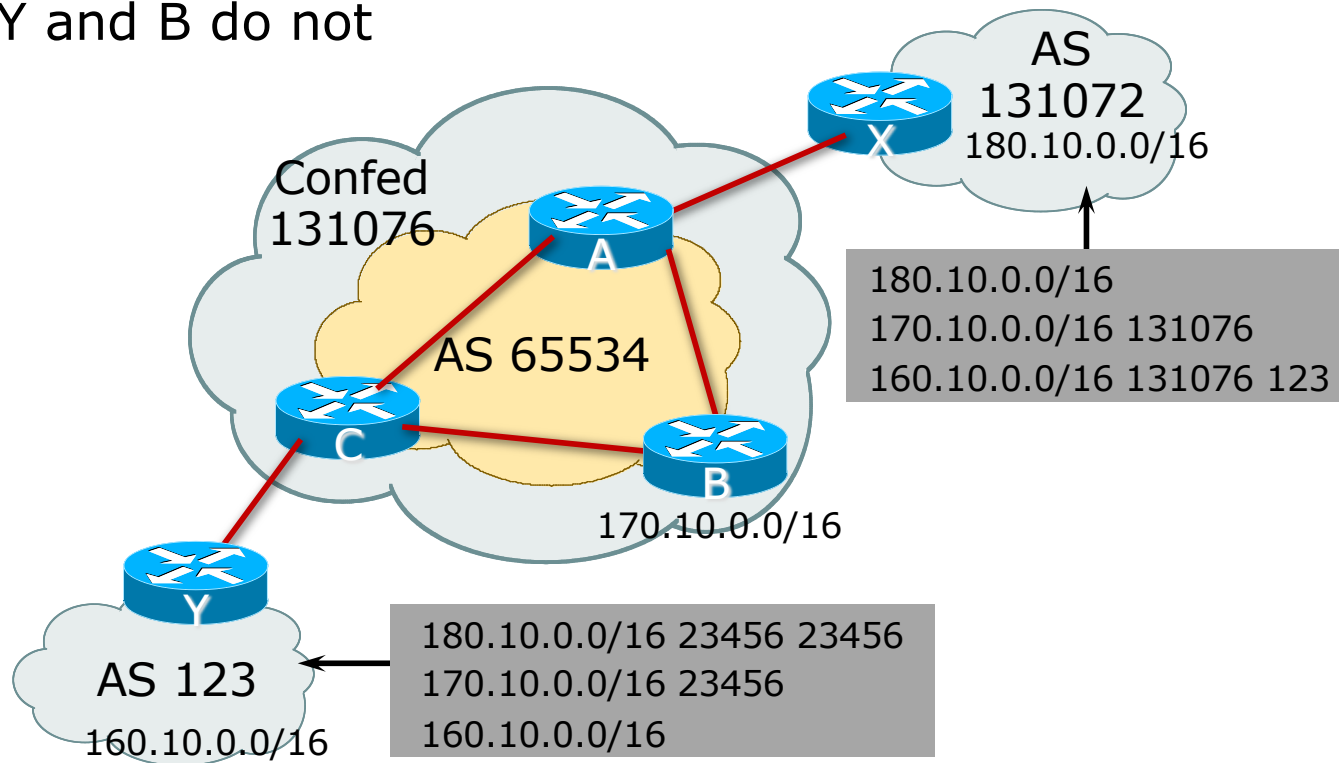



The Rules

- ❑ All routers with EBGP neighbours (customer, peer, upstream) must support 4-byte ASNs
- ❑ Remaining routers within the network do not have to support 4-byte ASNs
- ❑ Entire backbone operates in AS65534
 - Or any one private ASN from 64512 to 65534
- ❑ Only the EBGP speaking routers are confederation aware

Router X Configuration

- Router X is in AS131072
 - Supports 4-byte ASNs

```
interface FastEthernet 0/0
  description Link to RouterA
  ip address 192.168.1.1 255.255.255.252
!
router bgp 131072
  neighbor 192.168.1.2 remote 131076
  neighbor 192.168.1.2 description EBGP with RouterA
  network 180.10.0.0 mask 255.255.0.0
!
ip route 180.10.0.0 255.255.0.0 null0
```

Router A Configuration

```
interface Loopback 0
  ip address 192.168.2.1 255.255.255.255
!
interface FastEthernet 0/0
  description Link to RouterX
  ip address 192.168.1.2 255.255.255.252
!
router bgp 65534
  bgp confederation identifier 131076
  neighbor 192.168.1.1 remote 131072
  neighbor 192.168.1.1 description EBGP with RouterX
  neighbor 192.168.2.2 remote 65534
  neighbor 192.168.2.2 description IBGP with RouterB
  neighbor 192.168.2.2 next-hop-self
  neighbor 192.168.2.3 remote 65534
  neighbor 192.168.2.3 description IBGP with RouterC
  neighbor 192.168.2.3 next-hop-self
!
```

Router B Configuration

- Router B is in AS65534 (Confederation 131076)
 - Does not support configuration of 4-byte ASNs

```
interface Loopback 0
  ip address 192.168.2.2 255.255.255.255
!
router bgp 65534
  neighbor 192.168.2.1 remote 65534
  neighbor 192.168.2.1 description IBGP with RouterA
  neighbor 192.168.2.1 next-hop-self
  neighbor 192.168.2.3 remote 65534
  neighbor 192.168.2.3 description IBGP with RouterC
  neighbor 192.168.2.3 next-hop-self
  network 170.10.0.0 mask 255.255.0.0
!
ip route 170.10.0.0 255.255.0.0 null0
```

Router C Configuration

```
interface Loopback 0
  ip address 192.168.2.3 255.255.255.255
!
interface FastEthernet 0/0
  description Link to RouterY
  ip address 192.168.3.1 255.255.255.252
!
router bgp 65534
  bgp confederation identifier 131076
  neighbor 192.168.3.2 remote 123
  neighbor 192.168.3.2 description EBGP with RouterY
  neighbor 192.168.2.1 remote 65534
  neighbor 192.168.2.1 description IBGP with RouterA
  neighbor 192.168.2.1 next-hop-self
  neighbor 192.168.2.2 remote 65534
  neighbor 192.168.2.2 description IBGP with RouterB
  neighbor 192.168.2.2 next-hop-self
!
```

Router Y Configuration

- Router Y is in AS123
 - Does not support configuration of 4-byte ASNs

```
interface FastEthernet 0/0
  description Link to RouterC
  ip address 192.168.3.2 255.255.255.252
!
router bgp 123
  neighbor 192.168.3.1 remote 23456
  neighbor 192.168.3.1 description EBGP with RouterC in AS131076
  network 160.10.0.0 mask 255.255.0.0
!
ip route 160.10.0.0 255.255.0.0 null0
```

Commentary

- Only the edge routers, Router A and C, need to know about the confederation and carry the confederation configuration
 - Router B (and any other router participating in the IBGP) believe they are running in AS65534
 - The edge routers will remove the internal AS and present the confederation AS to EBGP neighbours

BGP on Router X

- Router X supports 4-byte ASNs
 - Sees AS131076 and AS123 transit

```
RouterX>sh ip bgp
BGP table version is 4, local router ID is 192.168.1.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 160.10.0.0	192.168.1.2			0	131076 123 i
*> 170.10.0.0	192.168.1.2			0	131076 i
*> 180.10.0.0	0.0.0.0	0		32768	i

BGP on Router A

- Router A supports 4-byte ASNs
 - IBGP with B and C, EBGP with X

```
RouterA>sh ip bgp
BGP table version is 4, local router ID is 192.168.2.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*>i160.10.0.0	192.168.2.3	0	100	0	123 i
*>i170.10.0.0	192.168.2.2	0	100	0	i
*> 180.10.0.0	192.168.1.1	0		0	131072 i

BGP on Router B

- Router B does not support 4-byte ASNs
 - IBGP with B and C; 4-byte ASNs seen as AS23456

```
RouterB>sh ip bgp
BGP table version is 4, local router ID is 192.168.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*>i160.10.0.0	192.168.2.3	0	100	0	123 i
*> 170.10.0.0	0.0.0.0	0		32768	i
*>i180.10.0.0	192.168.2.1	0	100	0	23456 i

BGP on Router C

- Router C supports 4-byte ASNs
 - IBGP with A and B, EBGP with Y

```
RouterC>sh ip bgp
BGP table version is 4, local router ID is 192.168.2.3
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 160.10.0.0	192.168.3.2	0		0	123 i
*>i170.10.0.0	192.168.2.2	0	100	0	i
*>i180.10.0.0	192.168.2.1	0	100	0	131072 i

BGP on Router Y

- Router Y does not support 4-byte ASNs
 - EBGW with C; 4-byte ASNs seen as AS23456

```
RouterY>sh ip bgp
BGP table version is 4, local router ID is 192.168.3.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 160.10.0.0	0.0.0.0	0		32768	i
*> 170.10.0.0	192.168.3.1			0	23456 i
*> 180.10.0.0	192.168.3.1			0	23456 23456 i

BGP Confederation “hack”

- ❑ Not really a hack, but a workaround so that non-EBGP speaking backbone routers can participate in IBGP using 4-byte ASNs
- ❑ Important:
 - EBGP routers (border and aggregation edge) must support 4-byte ASNs
 - Multiple internal ASes can work provided that internal AS edge routers (EIBGP speakers) support 4-byte ASNs too; they require:

```
bgp confederation identifier <4-byte-ASN>
```

Summary

- Deploying 4-byte ASNs can be done three ways:
 - Entire IBGP mesh (upgrading software and/or routers as appropriate)
 - Omit non-4-byte ASN routers from IBGP mesh, or treat them as pseudo BGP customers (like RFC2270)
 - Using the BGP Confederation “hack”
- Or return 4-byte ASN to RIR in exchange for 2-byte ASN (if possible)

Deploying 32-bit ASNs

ISP Workshops