

Router Hardware

An important requirement for establishing any peering link is to ensure that there is suitable router hardware available. This section looks at what considerations need to be made when choosing a router for the new connection being planned.

For completeness, the section will also cover the router consideration for the entity's first Internet connection (to its upstream provider).

- [First Internet Link](#)
- [Private Peering Link](#)

First Internet Link

For an organisation embarking on establishing their first Internet connection, a router will be required. The Peering Toolbox can't provide an exhaustive summary of all the options and combinations available but the key points to note are documented here.

Type

The Peering Toolbox is aimed at organisations who are or are planning to take part in peering. For this reason a consumer/home router (often erroneously called an "internet modem") is not sufficient and cannot be recommended (even through there are some quite capable devices available).


The type that needs to be looked at need to be "enterprise grade" which means it is offered with warranty, a support contract (often required by enterprises), is usefully rack (or shelf) mountable, has possibility of redundant power supplies, and supports a command line interface suitable for human or automated tool use.

Alternatively, there are several software routers available which could be installed on a Linux container or virtual machine or small Linux appliance. These might be entirely suitable, as the software is usually fully featured (like the main stream vendor routers) and very capable.

Interfaces

The router needs to have internal and external interfaces to match the physical media in use.

Internal interface types are usually only Gigabit Ethernet today, at a minimum, even on the most inexpensive devices. The number of internal interfaces needed depends entirely on the organisational needs. Usually a single or dual interfaces are all that are needed, connecting to the organisation's core router, or routers. The diagram shows two possibilities - the core router drawn represents the existing network infrastructure, be it an existing router or layer-3 switch.

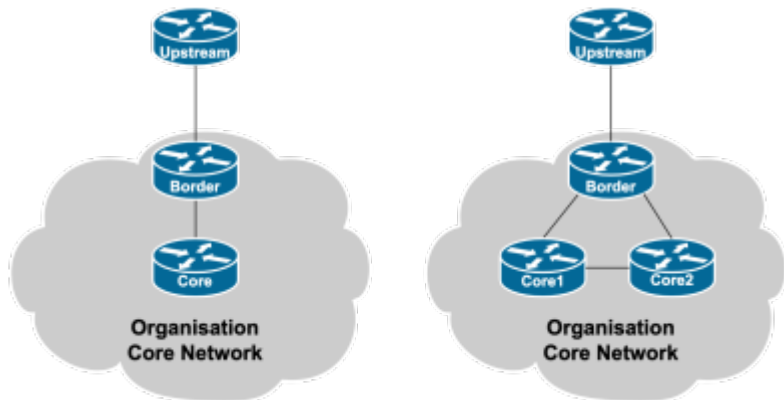

It's a good idea to separate the router that has the upstream connection from the core of the network, for the security of having a clear demarcation point, and so that specific border functions don't overload the core devices in the network.

External interface types can range from Gigabit Ethernet, SFP-based fibre optics, various coaxial or copper telephony wiring, to point-to-point wireless. Many of the enterprise routers come with a dizzying amount of configuration options - if the future trajectory for the upstream (and peering) physical media access is uncertain, perhaps specifying a router that has a range of upstream link options would be the most prudent choice to make.

Throughput

The router needs to be able to handle the throughput of the link being purchased, and leave sufficient CPU and memory capacity for future upgrades.

Note that even if the router may have Gigabit or fibre optic interfaces, there is no guarantee that it can actually deliver Gbps rates. This is especially true for the CPU based routers whose throughput slows down significantly with increasing traffic, packet filtering configured, and Network Address Translation (if sufficient IPv4 address space is not available).

It is important to check with the vendor what the true throughput is in a realistic use case (known as Internet Mix or IMIX, representing the typical average packet size seen on the Internet today), not lab testing!

IPv4 & IPv6

If the transit provider uses both IPv4 and IPv6 on their network, the router must be able to handle IPv4 and IPv6 (dual-stack operation). Using IPv6 is advantageous as it means that content traffic will not have to traverse Network Address Translation devices in the upstream's network or use the NAT feature on the router, reducing the resource burden.

BGP

If BGP is going to be used, the router must be BGP capable, although it does not have to or need to carry the full BGP table (which is large and growing rapidly)

Private Peering Link

This router is normally dedicated only for peering connections, whether connecting to public peers at an IXP or private peers. If procuring a separate router is not a possibility, it is possible that an existing router could be used, so long as it meets the appropriate technical requirements for participating in a peering infrastructure (full support of BGP, sufficient controlplane memory and CPU capacity).

Public Peering Link

This router is normally dedicated only for peering connections, whether connecting to public peers at an IXP or private peers. If procuring a separate router is not a possibility, it is possible that an existing router could be used, so long as it meets the appropriate technical requirements for participating in a peering infrastructure (full support of BGP, sufficient controlplane memory and CPU capacity).

[Back to "What I need to Peer" page](#)

From:

<https://bgp4all.com/pfs/> - **Philip Smith's Internet Development Site**

Permanent link:

<https://bgp4all.com/pfs/peering-toolbox/hardware?rev=1660818174>

Last update: **2022/08/18 10:22**

